

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Adjustable speed electrical power drive systems
Part 7-201: Generic interface and use of profiles for power drive systems –
Profile type 1 specification**

**Entraînements électriques de puissance à vitesse variable –
Partie 7-201: Interface générique et utilisation de profils pour les entraînements
électriques de puissance – Spécification de profil de type 1**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2015 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

Plus de 60 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Adjustable speed electrical power drive systems –
Part 7-201: Generic interface and use of profiles for power drive systems –
Profile type 1 specification**

**Entraînements électriques de puissance à vitesse variable –
Partie 7-201: Interface générique et utilisation de profils pour les entraînements
électriques de puissance – Spécification de profil de type 1**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.200; 35.100.05

ISBN 978-2-8322-2934-7

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	17
INTRODUCTION.....	19
1 Scope.....	23
2 Normative references	23
3 Terms, definitions and abbreviated terms	23
3.1 Terms and definitions.....	23
3.2 Abbreviated terms.....	27
4 General	28
4.1 General considerations	28
4.2 Communication interface.....	28
4.3 Object dictionary.....	29
5 Data types	30
5.1 Standard data types.....	30
5.2 Record definitions	30
6 General object definitions	31
6.1 General.....	31
6.2 Communication parameter objects	31
6.3 Additional identification and information objects	32
6.3.1 Object 6402 _h : Motor type.....	32
6.3.2 Object 6403 _h : Motor catalogue number	33
6.3.3 Object 6404 _h : Motor manufacturer.....	34
6.3.4 Object 6405 _h : http motor catalogue address	35
6.3.5 Object 6406 _h : Motor calibration date	35
6.3.6 Object 6407 _h : Motor service period	36
6.3.7 Object 6503 _h : Drive catalogue number	36
6.3.8 Object 6505 _h : http drive catalogue address	37
7 Error codes and error behavior	37
7.1 Error codes	37
7.2 Error behavior	41
8 Controlling the power drive system	42
8.1 General.....	42
8.2 Finite state automaton	42
8.3 Modes of operation	45
8.4 Detailed object specifications.....	46
8.4.1 Object 6040 _h : Controlword	46
8.4.2 Object 6041 _h : Statusword.....	47
8.4.3 Object 603F _h : Error code.....	49
8.4.4 Object 6007 _h : Abort connection option code	50
8.4.5 Object 605A _h : Quick stop option code	51
8.4.6 Object 605B _h : Shutdown option code	51
8.4.7 Object 605C _h : Disable operation option code	52
8.4.8 Object 605D _h : Halt option code	53
8.4.9 Object 605E _h : Fault reaction option code	54
8.4.10 Object 6060 _h : Modes of operation	54
8.4.11 Object 6061 _h : Modes of operation display	56

8.4.12	Object 6502 _h : Supported drive modes	56
9	Factor group	57
9.1	General	57
9.2	Detailed object definitions	59
9.2.1	Object 608F _h : Position encoder resolution	59
9.2.2	Object 6090 _h : Velocity encoder resolution	60
9.2.3	Object 6091 _h : Gear ratio	61
9.2.4	Object 6092 _h : Feed constant	62
9.2.5	Object 6096 _h : Velocity factor	64
9.2.6	Object 6097 _h : Acceleration factor	64
9.2.7	Object 60A2 _h : Jerk factor	65
9.2.8	Object 607E _h : Polarity	66
9.2.9	Code table for device profile specific units	67
9.2.10	Object 60A8 _h : SI unit position	67
9.2.11	Object 60A9 _h : SI unit velocity	68
9.2.12	Object 60AA _h : SI unit acceleration	69
9.2.13	Object 60AB _h : SI unit jerk	70
10	Profile position mode	70
10.1	General information	70
10.2	Functional description	71
10.2.1	General	71
10.2.2	Single set-point	72
10.2.3	Set of set-points	73
10.2.4	Usage of halt bit in conjunction with the set-point bit	74
10.3	General definitions	75
10.4	Use of controlword and statusword	75
10.5	Detailed object definitions	76
10.5.1	Object 607A _h : Target position	76
10.5.2	Object 607B _h : Position range limit	77
10.5.3	Object 607D _h : Software position limit	78
10.5.4	Object 607F _h : Max profile velocity	80
10.5.5	Object 6080 _h : Max motor speed	81
10.5.6	Object 6081 _h : Profile velocity	81
10.5.7	Object 6082 _h : End velocity	82
10.5.8	Object 6083 _h : Profile acceleration	82
10.5.9	Object 6084 _h : Profile deceleration	83
10.5.10	Object 6085 _h : Quick stop deceleration	83
10.5.11	Object 6086 _h : Motion profile type	84
10.5.12	Object 60A3 _h : Profile jerk use	85
10.5.13	Object 60A4 _h : Profile jerk	85
10.5.14	Object 60C5 _h : Max acceleration	87
10.5.15	Object 60C6 _h : Max deceleration	88
11	Homing mode	89
11.1	General information	89
11.2	Functional description	89
11.3	General definitions	90
11.3.1	General	90
11.3.2	Method 1: Homing on negative limit switch and index pulse	90
11.3.3	Method 2: Homing on positive limit switch and index pulse	90

11.3.4	Method 3 and 4: Homing on positive home switch and index pulse	90
11.3.5	Method 5 and 6: Homing on negative home switch and index pulse	91
11.3.6	Method 7 to 14: Homing on home switch and index pulse	91
11.3.7	Method 15 and 16: Reserved	92
11.3.8	Method 17 to 30: Homing without index pulse	92
11.3.9	Method 31 and 32: Reserved	93
11.3.10	Method 33 and 34: Homing on index pulse	93
11.3.11	Method 35: Homing on current position (obsolete)	93
11.3.12	Method 36: Reserved for compatibility reasons	93
11.3.13	Method 37: Homing on current position	93
11.4	Use of controlword and statusword	94
11.5	Detailed object definitions	94
11.5.1	Object 607C _h : Home offset	94
11.5.2	Object 6098 _h : Homing method	95
11.5.3	Object 60E3 _h : Supported homing methods	96
11.5.4	Object 6099 _h : Homing speeds	97
11.5.5	Object 609A _h : Homing acceleration	98
12	Touch probe functionality	99
12.1	Object 60B8 _h : Touch probe function	99
12.2	Object 60B9 _h : Touch probe status	101
12.3	Object 60BA _h : Touch probe 1 positive edge	102
12.4	Object 60BB _h : Touch probe 1 negative edge	102
12.5	Object 60BC _h : Touch probe 2 positive edge	103
12.6	Object 60BD _h : Touch probe 2 negative edge	103
12.7	Object 60D0 _h : Touch probe source	104
12.8	Touch probe time stamp latch	105
12.8.1	General	105
12.8.2	Object 60D1 _h : Touch probe time stamp 1 positive value	106
12.8.3	Object 60D2 _h : Touch probe time stamp 1 negative value	106
12.8.4	Object 60D3 _h : Touch probe time stamp 2 positive value	107
12.8.5	Object 60D4 _h : Touch probe time stamp 2 negative value	107
12.9	Touch probe edge counter for continuous mode	108
12.9.1	General	108
12.9.2	Object 60D5 _h : Touch probe 1 positive edge counter	108
12.9.3	Object 60D6 _h : Touch probe 1 negative edge counter	108
12.9.4	Object 60D7 _h : Touch probe 2 positive edge counter	109
12.9.5	Object 60D8 _h : Touch probe 2 negative edge counter	110
12.10	Timing diagram for touch probe example	110
13	Position control function	112
13.1	General information	112
13.2	Functional description	112
13.3	Detailed object definitions	114
13.3.1	Object 6062 _h : Position demand value	114
13.3.2	Object 6063 _h : Position actual internal value	115
13.3.3	Object 6064 _h : Position actual value	115
13.3.4	Object 6065 _h : Following error window	116
13.3.5	Object 6066 _h : Following error time out	117
13.3.6	Object 6067 _h : Position window	117
13.3.7	Object 6068 _h : Position window time	118

13.3.8	Object 60F4 _h : Following error actual value	118
13.3.9	Object 60FA _h : Control effort	119
13.3.10	Object 60FC _h : Position demand internal value	119
13.3.11	Object 60F2 _h : Positioning option code	120
14	Interpolated position mode	123
14.1	General information	123
14.2	Functional description	125
14.2.1	General	125
14.2.2	Linear interpolated position mode with several axes	125
14.2.3	Buffer strategies for the interpolated position mode	127
14.2.4	Interpolated position mode FSA	128
14.3	General definitions	129
14.4	Use of controlword and statusword	129
14.5	Detailed object definitions	130
14.5.1	Object 60C0 _h : Interpolation sub mode select	130
14.5.2	Object 60C1 _h : Interpolation data record	131
14.5.3	Object 60C2 _h : Interpolation time period	132
14.5.4	Object 60C4 _h : Interpolation data configuration	133
15	Profile velocity mode	136
15.1	General information	136
15.2	Functional description	136
15.3	General definitions	137
15.4	Use of controlword and statusword	137
15.5	Detailed object definitions	138
15.5.1	Object 6069 _h : Velocity sensor actual value	138
15.5.2	Object 606A _h : Sensor selection code	139
15.5.3	Object 606B _h : Velocity demand value	139
15.5.4	Object 606C _h : Velocity actual value	140
15.5.5	Object 606D _h : Velocity window	140
15.5.6	Object 606E _h : Velocity window time	141
15.5.7	Object 606F _h : Velocity threshold	141
15.5.8	Object 6070 _h : Velocity threshold time	142
15.5.9	Object 6075 _h : Target velocity	142
15.5.10	Object 6078 _h : Max slippage	143
16	Profile torque mode	144
16.1	General information	144
16.2	Functional description	144
16.3	General definitions	145
16.4	Use of controlword and statusword	145
16.5	Detailed object definitions	145
16.5.1	Object 6071 _h : Target torque	145
16.5.2	Object 6072 _h : Max torque	146
16.5.3	Object 60E0 _h : Positive torque limit value	146
16.5.4	Object 60E1 _h : Negative torque limit value	147
16.5.5	Object 6073 _h : Max current	148
16.5.6	Object 6074 _h : Torque demand	148
16.5.7	Object 6075 _h : Motor rated current	149
16.5.8	Object 6076 _h : Motor rated torque	149
16.5.9	Object 6077 _h : Torque actual value	150

16.5.10	Object 6078 _h : Current actual value.....	150
16.5.11	Object 6079 _h : DC link circuit voltage	151
16.5.12	Object 6087 _h : Torque slope.....	151
16.5.13	Object 6088 _h : Torque profile type.....	152
17	Velocity mode.....	152
17.1	General information	152
17.2	Functional description.....	153
17.2.1	Ramp function	153
17.2.2	Velocity control function.....	154
17.2.3	Factor function.....	154
17.3	General definitions.....	155
17.4	Use of controlword and statusword	155
17.5	Detailed object definitions	156
17.5.1	Object 6042 _h : vl target velocity.....	156
17.5.2	Object 6043 _h : vl velocity demand	156
17.5.3	Object 6044 _h : vl velocity actual value	157
17.5.4	Object 6046 _h : vl velocity min max amount	158
17.5.5	Object 6049 _h : vl velocity deceleration.....	159
17.5.6	Object 6048 _h : vl velocity acceleration.....	160
17.5.7	Object 604A _h : vl velocity quick stop.....	162
17.5.8	Object 604B _h : vl set-point factor	163
17.5.9	Object 604C _h : vl dimension factor	164
18	Cyclic synchronous position mode.....	166
18.1	General information	166
18.2	Functional description.....	166
18.3	Use of controlword and statusword	167
18.4	Detailed object definitions.....	168
18.4.1	Object 60B0 _h : Position offset.....	168
18.4.2	Object 60B1 _h : Velocity offset.....	168
18.4.3	Object 60B2 _h : Torque offset	169
19	Cyclic synchronous velocity mode	170
19.1	General information	170
19.2	General definitions.....	171
19.3	Functional description.....	171
19.4	Use of controlword and statusword	171
20	Cyclic synchronous torque mode	172
20.1	General information	172
20.2	General definitions.....	173
20.3	Functional description.....	173
20.4	Use of controlword and statusword	173
21	Cyclic synchronous torque mode with commutation angle (cstca)	174
21.1	General information	174
21.2	General definitions.....	175
21.3	Functional description.....	175
21.4	Use of controlword and statusword	175
21.5	Object 60EA _h : Commutation angle.....	176
22	Support of additional sensor interfaces	176
22.1	General.....	176

22.2	Object 60E4 _h : Additional position actual value	177
22.3	Object 60E5 _h : Additional velocity actual value	178
22.4	Object 60E6 _h : Additional position encoder resolution – encoder increments	179
22.5	Object 60E8 _h : Additional position encoder resolution – motor revolutions	180
22.6	Object 60E7 _h : Additional velocity encoder resolution – encoder increments per second	182
22.7	Object 60EC _h : Additional velocity encoder resolution – motor revolutions per second	183
22.8	Object 60E8 _h : Additional gear ratio – motor shaft revolutions	185
22.9	Object 60ED _h : Additional gear ratio – driving shaft revolutions	186
22.10	Object 60E9 _h : Additional feed constant – feed	186
22.11	Object 60EE _h : Additional feed constant – driving shaft revolutions	186
23	Optional application FE	189
23.1	General	189
23.2	Object 60FD _h : Digital inputs	189
23.3	Object 60FE _h : Digital outputs	190
24	Device information	191
24.1	General	191
24.2	Object 67FE _h : Version number	191
	Bibliography	193
	Figure 1 – Structure of IEC 61800-7	22
	Figure 2 – Value definition	31
	Figure 3 – Remote and local control	42
	Figure 4 – Power drive system finite state automaton	43
	Figure 5 – Relation between different value parameters	46
	Figure 6 – Value definition	46
	Figure 7 – Value definition	48
	Figure 8 – Value definition	56
	Figure 9 – Position scaling concept	58
	Figure 10 – Value definition	67
	Figure 11 – Example for a position unit	68
	Figure 12 – Example for a velocity unit	69
	Figure 13 – Example for an acceleration unit	70
	Figure 14 – Example for a jerk unit	70
	Figure 15 – Trajectory generator and position control function	71
	Figure 16 – Trajectory generator for profile position mode	71
	Figure 17 – Set-point example	72
	Figure 18 – Handshaking procedure for the single set-point method	72
	Figure 19 – Handshaking procedure for the set of set-points method	73
	Figure 20 – Set-point handling for two set-points	74
	Figure 21 – Erase set-point	75
	Figure 22 – Controlword for profile position (pp) mode	75
	Figure 23 – Statusword for profile position (pp) mode	76
	Figure 24 – Software position limits	79
	Figure 25 – Velocity/time diagram with jerk positions	86

Figure 26 – Homing mode function.....	89
Figure 27 – Homing on negative limit switch and index pulse	90
Figure 28 – Homing on positive limit switch and index pulse	90
Figure 29 – Homing on positive home switch and index pulse	91
Figure 30 – Homing on negative home switch and index pulse.....	91
Figure 31 – Homing on home switch and index pulse – positive initial motion	92
Figure 32 – Homing on home switch and index pulse – negative initial motion	92
Figure 33 – Homing on positive home switch	93
Figure 34 – Homing on index pulse.....	93
Figure 35 – Controlword for homing mode.....	94
Figure 36 – Statusword for homing mode.....	94
Figure 37 – Home offset definition	95
Figure 38 – Timing diagram for touch probe example.....	111
Figure 39 – Position control function	112
Figure 40 – Following error (functional overview)	113
Figure 41 – Position reached (functional overview)	113
Figure 42 – Position reached (definitions)	114
Figure 43 – Following error (definitions).....	114
Figure 44 – Object structure.....	120
Figure 45 – Rotary axis positioning example	122
Figure 46 – Example for absolute movement greater than modulo value	122
Figure 47 – Example for relative movement greater than modulo value.....	123
Figure 48 – Interpolation controller	125
Figure 49 – Interpolated position mode for two axes	126
Figure 50 – Linear interpolation for one axis	127
Figure 51 – Input buffer organization	128
Figure 52 – Input buffer examples	128
Figure 53 – Interpolated position mode FSA	129
Figure 54 – Controlword for interpolated position mode	129
Figure 55 – Statusword for interpolated position mode.....	130
Figure 56 – Profile velocity mode	137
Figure 57 – Controlword for profile velocity mode	137
Figure 58 – Statusword for profile velocity mode.....	138
Figure 59 – Structure of the profile torque mode	144
Figure 60 – Controlword for profile torque mode	145
Figure 61 – Statusword for profile torque mode.....	145
Figure 62 – Velocity mode with all objects	153
Figure 63 – Velocity mode with mandatory objects only	153
Figure 64 – Velocity profile	154
Figure 65 – Factor function	154
Figure 66 – Reverse factor function	154
Figure 67 – Controlword for profile velocity mode	155
Figure 68 – Usage of controlword bits in velocity mode.....	155

Figure 69 – Statusword for profile velocity mode	156
Figure 70 – Transfer characteristic of vl velocity min max amount	158
Figure 71 – Transfer characteristic of the velocity deceleration	159
Figure 72 – Transfer characteristic of the velocity acceleration	161
Figure 73 – Transfer characteristic of the quick stop deceleration	162
Figure 74 – Cyclic synchronous position mode overview	166
Figure 75 – Cyclic synchronous position control function	167
Figure 76 – Statusword for profile cyclic synchronous position mode	167
Figure 77 – Cyclic synchronous velocity mode overview	170
Figure 78 – Cyclic synchronous velocity control function	171
Figure 79 – Statusword for profile cyclic synchronous velocity mode	172
Figure 80 – Cyclic synchronous torque mode overview	173
Figure 81 – Cyclic synchronous torque control function	173
Figure 82 – Statusword for profile cyclic synchronous torque mode	174
Figure 83 – Cyclic synchronous torque mode with commutation angle overview	174
Figure 84 – Cyclic synchronous torque with commutation angle control function	175
Figure 85 – Statusword for cstca mode	175
Figure 86 – Object structure	189
Figure 87 – Object structure	190
Figure 88 – Structure of the standard version parameter	191
Table 1 – List of used data types	30
Table 2 – Interpolation time period	30
Table 3 – Interpolation data configuration	31
Table 4 – vl velocity acceleration/deceleration	31
Table 5 – Object description	32
Table 6 – Entry description	32
Table 7 – Value definition	33
Table 8 – Object description	33
Table 9 – Entry description	33
Table 10 – Object description	34
Table 11 – Entry description	34
Table 12 – Object description	34
Table 13 – Entry description	34
Table 14 – Object description	35
Table 15 – Entry description	35
Table 16 – Object description	35
Table 17 – Entry description	35
Table 18 – Object description	36
Table 19 – Entry description	36
Table 20 – Object description	36
Table 21 – Entry description	36
Table 22 – Object description	37

Table 23 – Entry description	37
Table 24 – Error codes	38
Table 25 – FSA states and supported functions	43
Table 26 – Transition events and actions	44
Table 27 – Command coding	47
Table 28 – Object description	47
Table 29 – Entry description	47
Table 30 – State coding	48
Table 31 – Object description	49
Table 32 – Entry description	49
Table 33 – Object description	49
Table 34 – Entry description	50
Table 35 – Value definition	50
Table 36 – Object description	50
Table 37 – Entry description	50
Table 38 – Value definition	51
Table 39 – Object description	51
Table 40 – Entry description	51
Table 41 – Value definition	52
Table 42 – Object description	52
Table 43 – Entry description	52
Table 44 – Value definition	52
Table 45 – Object description	53
Table 46 – Entry description	53
Table 47 – Value definition	53
Table 48 – Object description	53
Table 49 – Entry description	54
Table 50 – Value definition	54
Table 51 – Object description	54
Table 52 – Entry description	54
Table 53 – Value definition	55
Table 54 – Object description	55
Table 55 – Entry description	55
Table 56 – Object description	56
Table 57 – Entry description	56
Table 58 – Object description	57
Table 59 – Entry description	57
Table 60 – Object description	60
Table 61 – Entry description	60
Table 62 – Object description	61
Table 63 – Entry description	61
Table 64 – Object description	62
Table 65 – Entry description	62

Table 66 – Object description	63
Table 67 – Entry description	63
Table 68 – Object description	64
Table 69 – Entry description	64
Table 70 – Object description	65
Table 71 – Entry description	65
Table 72 – Object description	66
Table 73 – Entry description	66
Table 74 – Object description	67
Table 75 – Entry description	67
Table 76 – Device profile specific units	67
Table 77 – Object description	68
Table 78 – Entry description	68
Table 79 – Object description	68
Table 80 – Entry description	69
Table 81 – Object description	69
Table 82 – Entry description	69
Table 83 – Object description	70
Table 84 – Entry description	70
Table 85 – Definition of bit 4, bit 5, and bit 9.....	76
Table 86 – Definition of bit 6 and bit 8.....	76
Table 87 – Definition of bit 10, bit 12, and bit 13	76
Table 88 – Object description	77
Table 89 – Entry description	77
Table 90 – Object description	77
Table 91 – Entry description	78
Table 92 – Object description	79
Table 93 – Entry description	80
Table 94 – Object description	80
Table 95 – Entry description	81
Table 96 – Object description	81
Table 97 – Entry description	81
Table 98 – Object description	82
Table 99 – Entry description	82
Table 100 – Object description.....	82
Table 101 – Entry description	82
Table 102 – Object description.....	83
Table 103 – Entry description	83
Table 104 – Object description.....	83
Table 105 – Entry description	83
Table 106 – Object description.....	84
Table 107 – Entry description	84
Table 108 – Value definition.....	84

Table 109 – Object description.....	84
Table 110 – Entry description	85
Table 111 – Object description.....	85
Table 112 – Entry description	85
Table 113 – Value assignments	86
Table 114 – Object description.....	86
Table 115 – Entry description	87
Table 116 – Object description.....	88
Table 117 – Entry description	88
Table 118 – Object description.....	88
Table 119 – Entry description	88
Table 120 – Definition of bit 4 and bit 8.....	94
Table 121 – Definition of bit 10, bit 12, and bit 13	94
Table 122 – Object description.....	95
Table 123 – Entry description	95
Table 124 – Value definition.....	96
Table 125 – Object description.....	96
Table 126 – Entry description	96
Table 127 – Object description.....	96
Table 128 – Entry description	97
Table 129 – Object description.....	98
Table 130 – Entry description	98
Table 131 – Object description.....	99
Table 132 – Entry description	99
Table 133 – Value definition.....	100
Table 134 – Object description.....	100
Table 135 – Entry description	101
Table 136 – Value definition.....	101
Table 137 – Object description.....	101
Table 138 – Entry description	102
Table 139 – Object description.....	102
Table 140 – Entry description	102
Table 141 – Object description.....	102
Table 142 – Entry description	103
Table 143 – Object description.....	103
Table 144 – Entry description	103
Table 145 – Object description.....	103
Table 146 – Entry description	104
Table 147 – Value definition.....	104
Table 148 – Object description.....	104
Table 149 – Entry description	105
Table 150 – Object description.....	106
Table 151 – Entry description	106

Table 152 – Object description.....	106
Table 153 – Entry description	106
Table 154 – Object description.....	107
Table 155 – Entry description	107
Table 156 – Object description.....	107
Table 157 – Entry description	107
Table 158 – Object description.....	108
Table 159 – Entry description	108
Table 160 – Object description.....	109
Table 161 – Entry description	109
Table 162 – Object description.....	109
Table 163 – Entry description	109
Table 164 – Object description.....	110
Table 165 – Entry description	110
Table 166 – Explanation of the timing diagram.....	112
Table 167 – Object description.....	115
Table 168 – Entry description	115
Table 169 – Object description.....	115
Table 170 – Entry description	115
Table 171 – Object description.....	116
Table 172 – Entry description	116
Table 173 – Object description.....	116
Table 174 – Entry description	116
Table 175 – Object description.....	117
Table 176 – Entry description	117
Table 177 – Object description.....	117
Table 178 – Entry description	118
Table 179 – Object description.....	118
Table 180 – Entry description	118
Table 181 – Object description.....	118
Table 182 – Entry description	119
Table 183 – Object description.....	119
Table 184 – Entry description	119
Table 185 – Object description.....	120
Table 186 – Entry description	120
Table 187 – Value definition for bit 0 and bit 1	120
Table 188 – Value definition for bit 2 and bit 3	121
Table 189 – Value definition for bit 4 and bit 5	121
Table 190 – Value definition for bit 6 and bit 7	121
Table 191 – Object description.....	123
Table 192 – Entry description	123
Table 193 – Position calculation in interpolated position mode for several axes	126
Table 194 – FSA states and supported functions	129

Table 195 – Transition events and actions	129
Table 196 – Definition of bit 4 and bit 8	130
Table 197 – Definition of bit 10 and bit 12	130
Table 198 – Value definition.....	130
Table 199 – Object description.....	131
Table 200 – Entry description	131
Table 201 – Object description.....	131
Table 202 – Entry description	132
Table 203 – Object description.....	133
Table 204 – Entry description	133
Table 205 – Object description.....	134
Table 206 – Entry description	135
Table 207 – Definition of bit 8	138
Table 208 – Definition of bit 10, bit 12, and bit 13	138
Table 209 – Object description.....	138
Table 210 – Entry description	139
Table 211 – Value definition.....	139
Table 212 – Object description.....	139
Table 213 – Entry description	139
Table 214 – Object description.....	140
Table 215 – Entry description	140
Table 216 – Object description.....	140
Table 217 – Entry description	140
Table 218 – Object description.....	141
Table 219 – Entry description	141
Table 220 – Object description.....	141
Table 221 – Entry description	141
Table 222 – Object description.....	142
Table 223 – Entry description	142
Table 224 – Object description.....	142
Table 225 – Entry description	142
Table 226 – Object description.....	143
Table 227 – Entry description	143
Table 228 – Object description.....	143
Table 229 – Entry description	143
Table 230 – Definition of bit 8	145
Table 231 – Definition of bit 10	145
Table 232 – Object description.....	146
Table 233 – Entry description	146
Table 234 – Object description.....	146
Table 235 – Entry description	146
Table 236 – Object description.....	147
Table 237 – Entry description	147

Table 238 – Object description..... 147

Table 239 – Entry description 147

Table 240 – Object description..... 148

Table 241 – Entry description 148

Table 242 – Object description..... 148

Table 243 – Entry description 148

Table 244 – Object description..... 149

Table 245 – Entry description 149

Table 246 – Object description..... 149

Table 247 – Entry description 150

Table 248 – Object description..... 150

Table 249 – Entry description 150

Table 250 – Object description..... 150

Table 251 – Entry description 151

Table 252 – Object description..... 151

Table 253 – Entry description 151

Table 254 – Object description..... 151

Table 255 – Entry description 152

Table 256 – Value definition..... 152

Table 257 – Object description..... 152

Table 258 – Entry description 152

Table 259 – Definition of bit 4, bit 5, bit 6, and bit 8 155

Table 260 – Object description..... 156

Table 261 – Entry description 156

Table 262 – Object description..... 157

Table 263 – Entry description 157

Table 264 – Object description..... 157

Table 265 – Entry description 157

Table 266 – Object description..... 158

Table 267 – Entry description 159

Table 268 – Object description..... 160

Table 269 – Entry description 160

Table 270 – Object description..... 161

Table 271 – Entry description 162

Table 272 – Object description..... 163

Table 273 – Entry description 163

Table 274 – Object description..... 164

Table 275 – Entry description 164

Table 276 – Object description..... 165

Table 277 – Entry description 165

Table 278 – Definition of bit 10, bit 12, and bit 13 168

Table 279 – Object description..... 168

Table 280 – Entry description 168

Table 281 – Object description.....	169
Table 282 – Entry description	169
Table 283 – Object description.....	169
Table 284 – Entry description	170
Table 285 – Definition of bit 10, bit 12, and bit 13	172
Table 286 – Definition of bit 10, bit 12, and bit 13	174
Table 287 – Definition of bit 10, bit 12, and bit 13	176
Table 288 – Object description.....	176
Table 289 – Entry description	176
Table 290 – Object description.....	177
Table 291 – Entry description	178
Table 292 – Object description.....	179
Table 293 – Entry description	179
Table 294 – Object description.....	180
Table 295 – Entry description	180
Table 296 – Object description.....	181
Table 297 – Entry description	181
Table 298 – Object description.....	182
Table 299 – Entry description	183
Table 300 – Object description.....	184
Table 301 – Entry description	184
Table 302 – Object description.....	185
Table 303 – Entry description	185
Table 304 – Object description.....	186
Table 305 – Entry description	186
Table 306 – Object description.....	187
Table 307 – Entry description	187
Table 308 – Object description.....	188
Table 309 – Entry description	188
Table 310 – Value definition.....	189
Table 311 – Object description.....	189
Table 312 – Entry description	190
Table 313 – Value definition.....	190
Table 314 – Object description.....	190
Table 315 – Entry description	191
Table 316 – Object description.....	192
Table 317 – Entry description	192

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –**Part 7-201: Generic interface and use of profiles
for power drive systems – Profile type 1 specification**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The International Standard IEC 61800-7-201 has been prepared by subcommittee SC 22G: Adjustable speed electric drive systems incorporating semiconductor power converters, of IEC technical committee TC 22: Power electronic systems and equipment.

This second edition cancels and replaces the first edition published in 2007. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- Updates, clarifications and enhancements.

The text of this standard is based on the following documents:

FDIS	Report on voting
22G/307/FDIS	22G/322/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61800 series, under the general title *Adjustable speed electrical power drive systems*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The IEC 61800 series is intended to provide a common set of specifications for adjustable speed electrical power drive systems.

IEC 61800-7 specifies profiles for power drive systems (PDS) and their mapping to existing communication systems by use of a generic interface model.

IEC 61800-7 describes a generic interface between control systems and power drive systems. This interface can be embedded in the control system. The control system itself can also be located in the drive (sometimes known as "smart drive" or "intelligent drive").

A variety of physical interfaces is available (analogue and digital inputs and outputs, serial and parallel interfaces, fieldbuses and networks). Profiles based on specific physical interfaces are already defined for some application areas (e.g. motion control) and some device classes (e.g. standard drives, positioner). The implementations of the associated drivers and application programmers interfaces are proprietary and vary widely.

IEC 61800-7 defines a set of common drive control functions, parameters, and state machines or description of sequences of operation to be mapped to the drive profiles.

IEC 61800-7 provides a way to access functions and data of a drive that is independent of the used drive profile and communication interface. The objective is a common drive model with generic functions and objects suitable to be mapped on different communication interfaces. This makes it possible to provide common implementations of motion control (or velocity control or drive control applications) in controllers without any specific knowledge of the drive implementation.

There are several reasons to define a generic interface:

For a drive device manufacturer

- less effort to support system integrators;
- less effort to describe drive functions because of common terminology;
- the selection of drives does not depend on availability of specific support;

For a control device manufacturer

- no influence of bus technology;
- easy device integration;
- independent of a drive supplier;

For a system integrator

- less integration effort for devices;
- only one understandable way of modeling;
- independent of bus technology,

Much effort is needed to design a motion control application with several different drives and a specific control system. The tasks to implement the system software and to understand the functional description of the individual components may exhaust the project resources. In some cases, the drives do not share the same physical interface. Some control devices just support a single interface which will not be supported by a specific drive. On the other hand, the functions and data structures are often specified with incompatibilities. This requires the system integrator to write special interfaces for the application software and this should not be his responsibility.

Some applications need device exchangeability or integration of new devices in an existing configuration. They are faced with different incompatible solutions. The efforts to adapt a solution to a drive profile and to manufacturer-specific extensions may be unacceptable. This will reduce the degree of freedom to select a device best suited for this application to the selection of the unit which will be available for a specific physical interface and supported by the controller.

IEC 61800-7-1 is divided into a generic part and several annexes as shown in Figure 1. The drive profiles types for CiA® 402¹, CIP Motion™², PROFIdrive³ and SERCOS®⁴ are mapped to the generic interface in the corresponding annex. The annexes have been submitted by open international network or fieldbus organizations which are responsible for the content of the related annex and use of the related trade marks.

This part of IEC 61800-7 specifies the profile type 1 (CiA® 402).

The profile types 2, 3 and 4 are specified in IEC 61800-7-202, IEC 61800-7-203 and IEC 61800-7-204.

¹ CiA® 402 is a registered trade mark of CAN in Automation e.V. (CiA). This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark CiA® 402. Use of the registered trade mark CiA® 402 requires permission of CAN in Automation e.V. (CiA).

² CIP Motion™ is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark CIP Motion™. Use of the trade mark CIP Motion™ requires permission of ODVA, Inc.

³ PROFIdrive is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIdrive. Use of the trade name PROFIdrive requires permission of PROFIBUS & PROFINET International.

⁴ SERCOS® is a registered trade mark of SERCOS International e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark SERCOS®. Use of the registered trade mark SERCOS® requires permission of the trade mark holder.

IEC 61800-7-301, IEC 61800-7-302, IEC 61800-7-303 and IEC 61800-7-304 specify how the profile types 1, 2, 3 and 4 are mapped to different network technologies (such as CANopen®⁵, CC-Link IE® Field Network⁶, EPA™⁷, EtherCAT®⁸, Ethernet Powerlink™⁹, DeviceNet™¹⁰, ControlNet™¹¹, EtherNet/IP™¹², PROFIBUS¹³, PROFINET¹⁴ and SERCOS®).

-
- ⁵ CANopen® is a registered trade mark of CAN in Automation e.V. (CiA). This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark CANopen®. Use of the registered trade mark CANopen® requires permission of CAN in Automation e.V. (CiA). CANopen® is an acronym for Controller Area Network *open* and is used to refer to EN 50325-4.
 - ⁶ CC-Link IE® Field Network is a registered trade mark of Mitsubishi Electric Corporation. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark CC-Link IE® Field Network. Use of the registered trade mark CC-Link IE® Field Network requires permission of Mitsubishi Electric Corporation.
 - ⁷ EPA™ is a trade mark of SUPCON Group Co. Ltd. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark EPA™. Use of the trade mark EPA™ requires permission of the trade mark holder.
 - ⁸ EtherCAT® is a registered trade mark of Beckhoff, Verl. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark EtherCAT™. Use of the trade mark EtherCAT™ requires permission of the trade mark holder.
 - ⁹ Ethernet Powerlink™ is a trade mark of B&R, control of trade mark use is given to the non profit organisation EPSG. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark Ethernet Powerlink™. Use of the trade mark Ethernet Powerlink™ requires permission of the trade mark holder.
 - ¹⁰ DeviceNet™ is a trade mark of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark DeviceNet™. Use of the trade mark DeviceNet™ requires permission of Open DeviceNet Vendor Association, Inc.
 - ¹¹ ControlNet™ is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark ControlNet™. Use of the trade mark ControlNet™ requires permission of ODVA, Inc.
 - ¹² EtherNet/IP™ is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark EtherNet/IP™. Use of the trade mark EtherNet/IP™ requires permission of ODVA, Inc.
 - ¹³ PROFIBUS is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIBUS. Use of the trade name PROFIBUS requires permission of PROFIBUS & PROFINET International.
 - ¹⁴ PROFINET is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFINET. Use of the trade name PROFINET requires permission of PROFIBUS & PROFINET International.

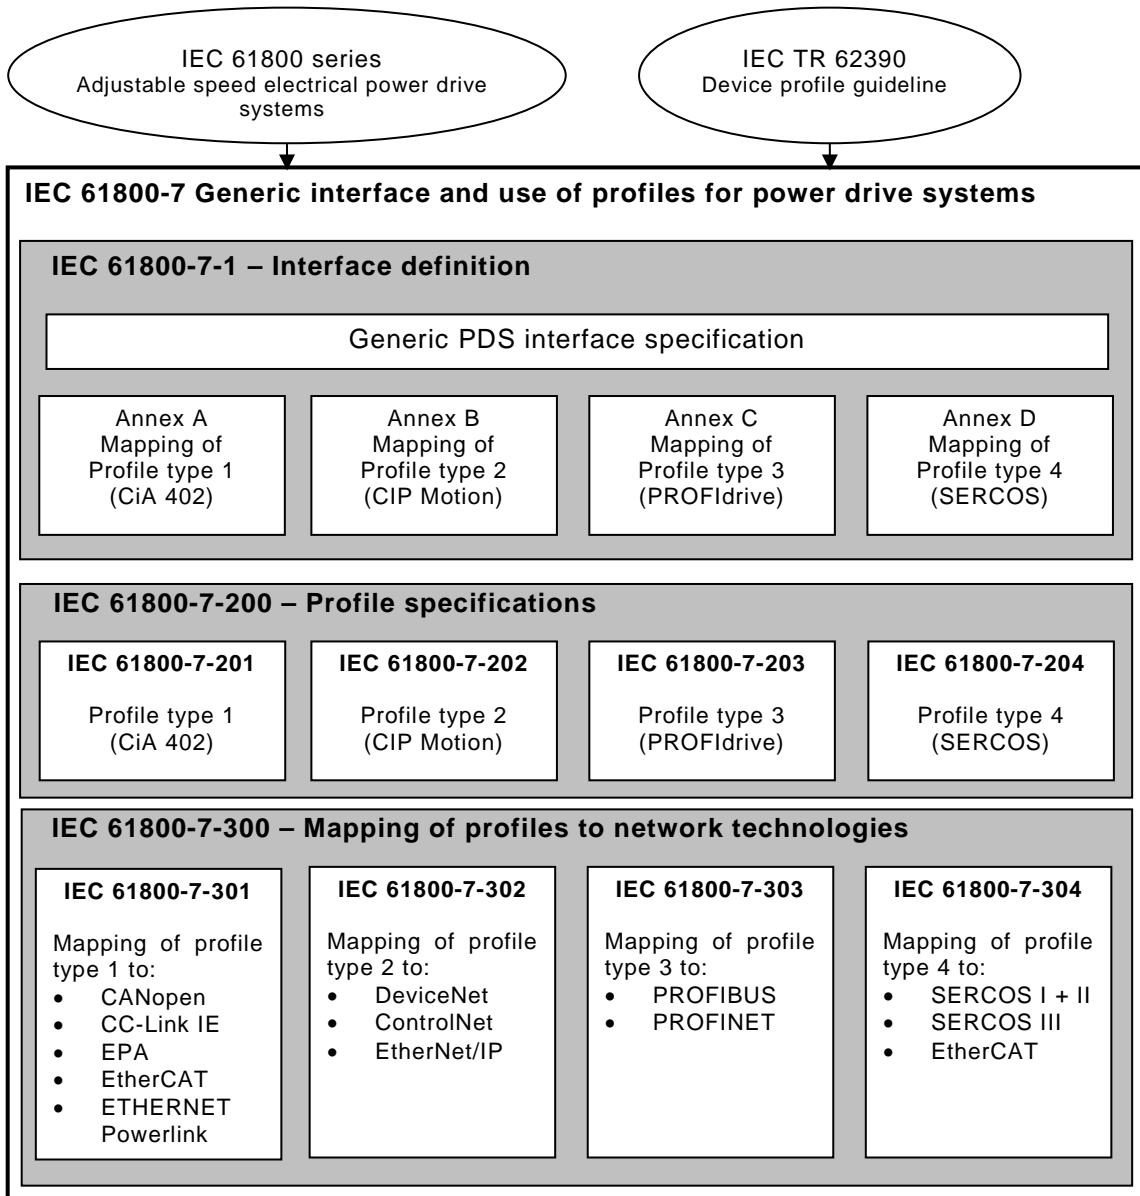


Figure 1 – Structure of IEC 61800-7

ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –

Part 7-201: Generic interface and use of profiles for power drive systems – Profile type 1 specification

1 Scope

This part of IEC 61800 specifies profile type 1 for power drive systems (PDS). Profile type 1 can be mapped onto different communication network technologies.

The functions specified in this part of IEC 61800 are not intended to ensure functional safety. This requires additional measures according to the relevant standards, agreements and laws.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61800-7-301¹⁵, *Adjustable speed electrical power drive systems – Part 7-301: Generic interface and use of profiles for power drive systems – Mapping of profile type 1 to network technologies*

EN 50325-4, *Industrial communications subsystem based on ISO 11898 (CAN) for controller-device interfaces – Part 4: CANopen*

CiA 303-2:2012, *CANopen recommendation – Part 2: Representation of SI units and prefixes*¹⁶

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1

actual value

value of a variable quantity at a given instant

Note 1 to entry: Actual value is used in this document as input data of the application control program to monitor variables of the PDS (e.g. feedback variables).

[SOURCE: IEC 61800-7-1:2015, 3.3.1.1]

¹⁵ To be published.

¹⁶ CiA 303-2 may be freely downloaded from www.can-cia.org. To avoid download misuse, the downloading person has to fill in a registration form, which does not arise some obligations to the specification user.