

Guide for Cellular Concretes above 50 lb/ft³ (800 kg/m³)

Reported by ACI Committee 523

ACI 523.3R-14



American Concrete Institute
Always advancing



Guide for Cellular Concretes above 50 lb/ft³ (800 kg/m³)

Copyright by the American Concrete Institute, Farmington Hills, MI. All rights reserved. This material may not be reproduced or copied, in whole or part, in any printed, mechanical, electronic, film, or other distribution and storage media, without the written consent of ACI.

The technical committees responsible for ACI committee reports and standards strive to avoid ambiguities, omissions, and errors in these documents. In spite of these efforts, the users of ACI documents occasionally find information or requirements that may be subject to more than one interpretation or may be incomplete or incorrect. Users who have suggestions for the improvement of ACI documents are requested to contact ACI via the errata website at <http://concrete.org/Publications/DocumentErrata.aspx>. Proper use of this document includes periodically checking for errata for the most up-to-date revisions.

ACI committee documents are intended for the use of individuals who are competent to evaluate the significance and limitations of its content and recommendations and who will accept responsibility for the application of the material it contains. Individuals who use this publication in any way assume all risk and accept total responsibility for the application and use of this information.

All information in this publication is provided “as is” without warranty of any kind, either express or implied, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose or non-infringement.

ACI and its members disclaim liability for damages of any kind, including any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of this publication.

It is the responsibility of the user of this document to establish health and safety practices appropriate to the specific circumstances involved with its use. ACI does not make any representations with regard to health and safety issues and the use of this document. The user must determine the applicability of all regulatory limitations before applying the document and must comply with all applicable laws and regulations, including but not limited to, United States Occupational Safety and Health Administration (OSHA) health and safety standards.

Participation by governmental representatives in the work of the American Concrete Institute and in the development of Institute standards does not constitute governmental endorsement of ACI or the standards that it develops.

Order information: ACI documents are available in print, by download, on CD-ROM, through electronic subscription, or reprint and may be obtained by contacting ACI.

Most ACI standards and committee reports are gathered together in the annually revised ACI Manual of Concrete Practice (MCP).

American Concrete Institute
3880 Country Club Drive
Farmington Hills, MI 48331
Phone: +1.248.848.3700
Fax: +1.248.848.3701

www.concrete.org

Guide for Cellular Concretes above 50 lb/ft³ (800 kg/m³)

Reported by ACI Committee 523

Konstantin Sobolev, Chair

Vivek S. Bindiganavile, Secretary

Felipe Babbitt
Ronald E. Barnett
Cesar Chan
Martin L. Cornelius
Bill T. Dye
Fouad H. Fouad

Edward (Ned) M. Glysson
Milton R. Gomez Jr.
Ralph D. Gruber
Werner H. Gumpertz
Richard E. Klingner
Leo A. Legatski

Daniel L. Liotti
Darmawan Ludirdja
Barzin Mobasher
John W. Rose
Sylvester B. Schmidt
Caijun Shi

Jennifer L. Tanner
Silvia A. Varatini
Bruce Weems
Peter T. Yen
Ronald F. Zollo

This guide addresses the materials, properties, design, production, and placement of cellular concretes with as-cast densities greater than 50 lb/ft³ (800 kg/m³). The usual density range of cellular concrete is 20 to 120 lb/ft³ (320 to 1920 kg/m³). Cellular concretes in the lower portion of this range are used for many applications, such as roof thermal insulation and geotechnical fills. Cellular concretes in the higher density range are used for cast-in-place, precast applications and nonstructural floor fills.

Keywords: cellular concrete; compressive strength; fire resistance; insulating concrete; lightweight concrete; mixture proportioning; modulus of elasticity; precast concrete; recyclability; shear properties; splitting tensile strength; structural design; sustainability; thermal conductivity.

CONTENTS

CHAPTER 1—INTRODUCTION AND SCOPE, p. 2

- 1.1—Introduction, p. 2
- 1.2—Scope, p. 2

CHAPTER 2—NOTATION AND DEFINITIONS, p. 2

- 2.1—Notation, p. 2
- 2.2—Definitions, p. 3

CHAPTER 3—MATERIALS, p. 3

- 3.1—Cement and supplementary cementitious materials, p. 3
- 3.2—Water, p. 3
- 3.3—Preformed foam, p. 3
- 3.4—Aggregates, p. 3
- 3.5—Admixtures, p. 3
- 3.6—Chemical admixtures, p. 3

CHAPTER 4—MIXING AND HANDLING, p. 4

- 4.1—Storage of materials, p. 4
- 4.2—Mixture proportioning, p. 4
- 4.3—Mixing procedure, p. 4
- 4.4—Conveying, p. 4
- 4.5—Curing, p. 4
- 4.6—Weather considerations, p. 4

CHAPTER 5—FORMING AND FINISHING, p. 5

- 5.1—Form systems, p. 5
- 5.2—Finishing, p. 5

CHAPTER 6—PROPERTIES OF CELLULAR CONCRETE, p. 6

- 6.1—Physical properties, p. 6
- 6.2—Mechanical performance, p. 7
- 6.3—Durability, p. 8

CHAPTER 7—DESIGN CONSIDERATIONS, p. 9

CHAPTER 8—MIXTURE PROPORTIONING, p. 9

- 8.1—General, p. 9

ACI Committee Reports, Guides, and Commentaries are intended to provide guidance in planning, designing, executing, and inspecting construction. This document is intended for the use of individuals who are competent to evaluate the significance and limitations of its content and recommendations and who will accept responsibility for the application of the material it contains. The American Concrete Institute disclaims any and all responsibility for the stated principles. The Institute shall not be liable for any loss or damage arising therefrom.

Reference to this document shall not be made in contract documents. If items found in this document are desired by the Architect/Engineer to be a part of the contract documents, they shall be restated in mandatory language for incorporation by the Architect/Engineer.

ACI 523.3R-14 supersedes ACI 523.3R-93 and was adopted and published April 2014.

Copyright © 2014, American Concrete Institute
All rights reserved including rights of reproduction and use in any form or by any means, including the making of copies by any photo process, or by electronic or mechanical device, printed, written, or oral, or recording for sound or visual reproduction or for use in any knowledge or retrieval system or device, unless permission in writing is obtained from the copyright proprietors.

- 8.2—Material properties, p. 10
- 8.3—Mixture proportioning, p. 10
- 8.4—Example 1 (in U.S. customary units), p. 10
- 8.5—Example 2 (in SI units), p. 11

CHAPTER 9—FIRE RESISTANCE OF CELLULAR CONCRETE ASSEMBLIES, p. 12

- 9.1—Measuring fire resistance, p. 12
- 9.2—Fire resistance studies, p. 12

CHAPTER 10—APPLICATIONS, p. 13

- 10.1—General, p. 13
- 10.2—Placement by tremie, p. 13
- 10.3—Screeded floor fill, p. 13
- 10.4—Masonry and structural, p. 13
- 10.5—Lightweight architectural concrete masonry, p. 13

CHAPTER 11—CELLULAR CONCRETE AND SUSTAINABILITY, p. 13

- 11.1—Sustainability, p. 13
- 11.2—Energy efficiency, p. 14
- 11.3—Materials saving, alternative ingredients, and use of by-products, p. 14
- 11.4—Production method, p. 15
- 11.5—Site disturbances, p. 15
- 11.6—Applications greater than 50 lb/ft³ (800 kg/m³), p. 15
- 11.7—Foaming agents, p. 15
- 11.8—Recyclability and reuse, p. 15
- 11.9—CO₂ sequestration, p. 15

CHAPTER 12—REFERENCES, p. 15

- Cited references, p. 16

CHAPTER 1—INTRODUCTION AND SCOPE

1.1—Introduction

This guide includes cellular concretes with cast densities in the range of 50 to 110 lb/ft³ (800 to 1760 kg/m³). Applications include, but are not limited to, insulating or geotechnical fills and cast-in-place and precast elements. A wide range of applications is possible by controlling the as-cast density and mixture proportioning that influence the main physical properties, such as strength, modulus of elasticity, and thermal conductivity. Commercial uses include cast-in-place, nonstructural floor fills; precast or cast-in-place elements such as wall panels; architectural applications such as manhole pipe fills (Fig. 1.1a); and pipeline abandonments (Fig. 1.1b).

Cellular concretes referenced in this guide contain stable gas cells uniformly distributed in a cementitious mixture (Fig. 1.1c). Typically, macroscopic bubbles are added at the mixer as stable preformed foam metered from a calibrated nozzle and thoroughly blended into the slurry. This guide does not cover the addition of an in-place-foam admixture that may require vigorous mixing to entrap air. Cellular concretes in the density range covered by this guide may contain natural or manufactured aggregates.

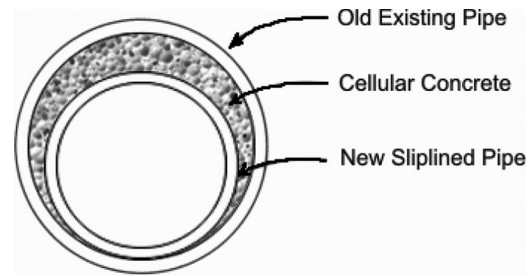


Fig. 1.1a—Sliplined pipe.

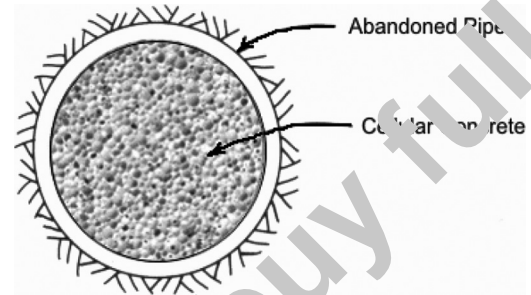


Fig. 1.1b—Pipeline abandonment.




Fig. 1.1c—Typical cell structure of cellular concrete.

1.2—Scope

This guide applies to cellular concretes with cast densities greater than 50 lb/ft³ (800 kg/m³). Precast and cast-in-place cellular concretes are within the scope of this guide. Compressive strengths may vary widely and are specified based on a particular application. To assist in selection, proportioning, and production of cellular concretes, the available material property information and applications of cellular concretes are also addressed.

CHAPTER 2—NOTATION AND DEFINITIONS

2.1—Notation

- A = dry mass of aggregate, lb/yd³ (kg/m³)
- A_v = air content, percentage
- C = mass of cement, lb/yd³ (kg/m³)
- D = oven dry density, lb/ft³ (kg/m³)
- d = diameter of test specimen, in. (mm)
- E_c = static modulus of elasticity of concrete, ksi (MPa)
- F = resistance to freezing and thawing, cycles
- f'_c = specified compressive strength of concrete, psi (MPa)
- f_{ct} = splitting tensile strength of concrete, psi (MPa)
- G_c = specific gravity of cement