

Design, Construction, Operation, and Maintenance of Offshore Hydrocarbon Pipelines (Limit State Design)

Downstream Segment

API RECOMMENDED PRACTICE 1111
FOURTH EDITION, DECEMBER 2009



Special Notes

API publications necessarily address problems of a general nature. With respect to particular circumstances, local, state, and federal laws and regulations should be reviewed.

Neither API nor any of API's employees, subcontractors, consultants, committees, or other assignees make any warranty or representation, either express or implied, with respect to the accuracy, completeness, or usefulness of the information contained herein, or assume any liability or responsibility for any use, or the results of such use, of any information or process disclosed in this publication. Neither API nor any of API's employees, subcontractors, consultants, or other assignees represent that use of this publication would not infringe upon privately owned rights.

Classified areas may vary depending on the location, conditions, equipment, and substances involved in any given situation. Users of this recommended practice (RP) should consult with the appropriate authorities having jurisdiction.

Users of this RP should not rely exclusively on the information contained in this document. Sound business, scientific, engineering, and safety judgment should be used in employing the information contained herein.

API publications may be used by anyone desiring to do so. Every effort has been made by the Institute to assure the accuracy and reliability of the data contained in them; however, the Institute makes no representation, warranty, or guarantee in connection with this publication and hereby expressly disclaims any liability or responsibility for loss or damage resulting from its use or for the violation of any authorities having jurisdiction with which this publication may conflict.

API publications are published to facilitate the broad availability of proven, sound engineering and operating practices. These publications are not intended to obviate the need for applying sound engineering judgment regarding when and where these publications should be utilized. The formulation and publication of API publications is not intended in any way to inhibit anyone from using any other practices.

Any manufacturer marking equipment or materials in conformance with the marking requirements of an API standard is solely responsible for complying with all the applicable requirements of that standard. API does not represent, warrant, or guarantee that such products do in fact conform to the applicable API standard.

Copyright reserved. No part of this work may be reproduced, translated, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from the publisher. Contact the Publisher, API Publishing Services, 1220 L Street, NW, Washington, DC 20005.

Copyright © 2009 American Petroleum Institute

Foreword

This recommended practice (RP) sets out criteria for the design, construction, testing, operation, and maintenance of offshore steel pipelines utilized in the production, production support, or transportation of hydrocarbons; that is, the movement by pipeline of hydrocarbon liquids, gases, and mixtures of these hydrocarbons with water.

The criteria contained in this document are intended to permit the economical transportation of hydrocarbons while providing for the safety of life and property and the protection of the environment. The general adoption of these criteria should assure that offshore hydrocarbon pipelines possess the requisite structural integrity for their safe and efficient operation.

API created an industry committee to develop appropriate uniform guidelines. The resulting first edition of API Recommended Practice 1111 was published in 1976. In 1989, the decision was made to create a revision that would provide industry with a more functional document. The resulting second edition was issued in November 1993. In 1997, a task force was formed to consider proposed changes to the RP based on a growing concern among pipeline engineers that existing codes lead to overly conservative designs for high-pressure pipelines having a low diameter to wall thickness (D/t) ratio. In fact, the second edition of the RP and the codes specifically excluded the pipelines categorized as flowlines which typically require these low D/t ratio (see ASME B31.4 and ASME B31.8). This RP includes a "limit state design" methodology. Safety margins similar to existing levels are obtained for the lower D/t ratio by changing to a limit state design based on the actual burst strength of pipe. The burst pressure formula in the document is based on theoretical considerations and confirmed by more than 250 burst tests of full-size pipe specimens that cover a wide range of pipe grade, diameter, and wall thickness.

Portions of this publication have changed from the previous editions, which have been an RP, but the changes are too numerous to use bar notations in this edition. In some cases, the changes are significant, while in other cases the changes reflect minor editorial adjustments.

Nothing contained in any API publication is to be construed as granting any right, by implication or otherwise, for the manufacture, sale, or use of any method, apparatus, or product covered by letters patent. Neither should anything contained in the publication be construed as insuring anyone against liability for infringement of letters patent.

Shall: As used in a standard, "shall" denotes a minimum requirement in order to conform to the specification.

Should: As used in a standard, "should" denotes a recommendation or that which is advised but not required in order to conform to the specification.

This document was produced under API standardization procedures that ensure appropriate notification and participation in the development process and is designated as an API standard. Questions concerning the interpretation of the content of this publication or comments and questions concerning the procedures under which this publication was developed should be directed in writing to the Director of Standards, American Petroleum Institute, 1220 L Street, NW, Washington, DC 20005. Requests for permission to reproduce or translate all or any part of the material published herein should also be addressed to the director.

Generally, API standards are reviewed and revised, reaffirmed, or withdrawn at least every five years. A one-time extension of up to two years may be added to this review cycle. Status of the publication can be ascertained from the API Standards Department, telephone (202) 682-8000. A catalog of API publications and materials is published annually by API, 1220 L Street, NW, Washington, DC 20005.

Suggested revisions are invited and should be submitted to the Standards Department, API, 1220 L Street, NW, Washington, DC 20005, standards@api.org.

Currently in preview, click buy full version

Contents

	Page
1 Scope	1
2 Normative References	3
3 Terms, Definitions, Acronyms, Abbreviations, and Symbols	4
3.1 Terms and Definitions	4
3.2 Acronyms, Abbreviations, and Symbols	6
4 Design	8
4.1 Design Conditions	8
4.2 Design Criteria	11
4.3 Pressure Design of Components	12
4.4 Marine Design	18
4.5 Fatigue Analysis	20
4.6 Load Limits	21
4.7 Valves, Supporting Elements, and Piping	22
4.8 Route Selection	23
4.9 Flow Assurance	23
4.10 Thermal Expansion Design	24
5 Materials and Dimensions	24
5.1 Materials	24
5.2 Dimensions	25
6 Safety Systems	25
6.1 General	25
6.2 Liquid and Gas Transportation Systems on Nonproduction Platforms	25
6.3 Liquid and Gas Transportation Systems on Production Platforms	25
6.4 Breakaway Connectors	26
7 Construction and Welding	26
7.1 Construction	26
7.2 Welding	27
7.3 Other Components and Procedures	29
8 Inspection and Testing	30
8.1 General	30
8.2 Testing	32
9 Operation and Maintenance	34
9.1 System Guidelines	34
9.2 Pipeline Operations	35
9.3 Emergency Plan	38
9.4 Records	39
9.5 Qualification of the Pipeline System for Higher Operating Pressure	39
9.6 Change in Pipeline Use	39
9.7 Pipeline Abandonment	39
10 Corrosion Control	40
10.1 General	40
10.2 External Coatings	40
10.3 Cathodic Protection	41
10.4 Internal Corrosion Control	41

10.5 Maintenance of Cathodic Protection Systems	42
10.6 Records	42
Annex A (normative) Procedure for Determining Burst Design Criteria for Other Materials	43
Annex B (normative) Qualification of Increased Minimum Burst Pressure	47
Annex C (informative) Example Calculations for Internal Pressure (Burst) Design and Wall Thickness	47
Annex D (informative) External Pressure Design Example	54
Bibliography	68

Figures

1 Scope of API 1111	2
2 Pressure Level Relations	11
A.1 Ductile Burst Sample	45
A.2 Brittle Burst Sample	45
C.1 Example Subsea Flowlines and Risers	54

Tables

1 Minimum Radius of Field Cold Bends	21
C.1 Pipe Data	49
C.2 PIP, Gas/Oil Production Flowline and Riser	55
C.3 Single-pipe, Gas/Oil Production Flowline and Riser	56
C.4 PIP, Gas/Oil Production Flowline and Riser Limiting Riser to Within a Horizontal Distance of 300 ft from the Surface Facility	57
C.5 Single-pipe, Gas/Oil Production Flowline and Riser Limiting Riser to Within a Horizontal Distance of 300 ft from the Surface Facility	58
C.6 PIP, Gas/Oil Production Flowline and Riser Increased Burst Pressure Due to Improved Mechanical Properties and Dimensions Control	59
C.7 Single-pipe, Gas/Oil Production Flowline and Riser Increased Burst Pressure Due to Improved Mechanical Properties and Dimensions Control	60
C.8 PIP, Gas/Oil Production Flowline and Riser Limiting Riser to Within a Horizontal Distance of 300 ft from the Surface Facility Increased Burst Pressure Due to Improved Mechanical Properties and Dimensions Control	61
C.9 Single-pipe, Gas/Oil Production Flowline and Riser Limiting Riser to Within a Horizontal Distance of 300 ft from the Surface Facility Increased Burst Pressure Due to Improved Mechanical Properties and Dimensions Control	62
C.10 Comparison of Results	63
D.1 Net External Pressure Loading	65
D.2 Collapse Pressure	65
D.3 External Pressure Collapse Resistance	65
D.4 Buckling Limit State Bending Strains	67
D.5 Combined Bending and External Buckle Resistance	67

Design, Construction, Operation, and Maintenance of Offshore Hydrocarbon Pipelines (Limit State Design)

1 Scope

1.1 This recommended practice (RP) sets criteria for the design, construction, testing, operation, and maintenance of offshore steel pipelines utilized in the production, production support, or transportation of hydrocarbons; that is, the movement by pipeline of hydrocarbon liquids, gases, and mixtures of these hydrocarbons with water. This RP may also be utilized for water injection pipelines offshore.

1.2 The RP also applies to any transportation piping facilities located on a production platform, flow stream of separation and treatment facilities, including meter facilities, gas compression facilities, liquid pumps, associated piping, and appurtenances.

1.3 Limit state design has been incorporated in this RP to provide a uniform factor of safety with respect to rupture or burst failure as the primary design condition independent of the pipe diameter, wall thickness, and grade. Background on theory and practice of limit states for pressure-containing cylinders may be found in Hill [2] and in Crossland and Jones [1], as listed in the Bibliography at the end of the RP. Burst design criteria within this practice are presently defined for carbon steel line pipe. Application of the proposed design criteria to other materials requires determination by the user of the minimum burst criteria using the procedure set forth in Annex A.

1.4 The design, construction, inspection, and testing provisions of this RP may not apply to offshore hydrocarbon pipelines designed or installed before this latest revision of the RP was issued. The operation and maintenance provisions of this RP are suitable for application to existing facilities.

1.5 Design and construction practices other than those set forth in Section 4 and Section 7 may be employed when supported by adequate technical justification, including model or proof testing of involved components or procedures as appropriate. Nothing in this RP should be considered as a fixed rule for application without regard to sound engineering judgment.

NOTE Certain governmental requirements or company specifications may differ from the criteria set forth in this RP, and this RP does not supersede or override those differing requirements or specifications.

1.6 This publication has incorporated by reference all or parts of several existing codes, standards, and RPs that have been found acceptable for application to offshore hydrocarbon pipelines.

Caution—Users shall use the most recent editions of all reference documents in this RP. For ASME B31.4 and ASME B31.8 specifically, the 2006 edition and the 2007 edition, respectively, of the documents were used as the basis for determining the requirements. However, the reference is meant to be to the corresponding part in the latest revision or edition of the publication.

1.7 For a graphic representation of the scope of this RP, see Figure 1.

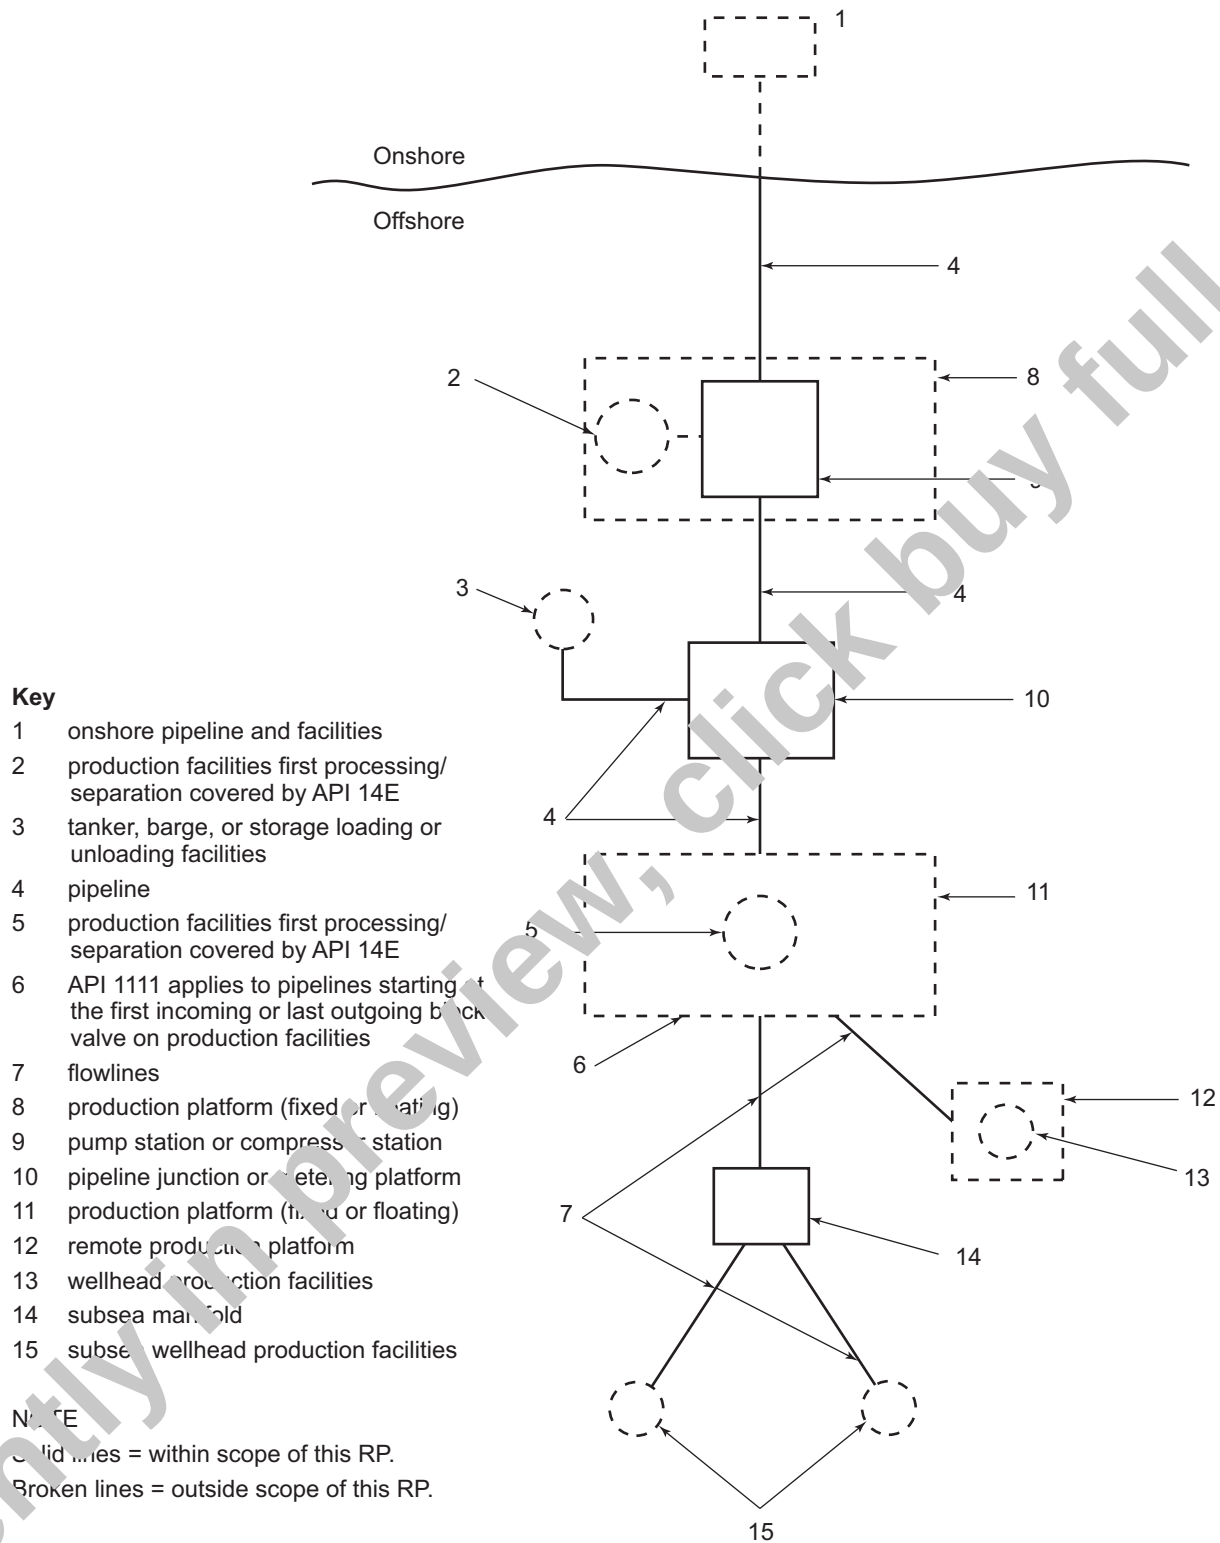


Figure 1—Scope of API 1111

2 Normative References

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

API Recommended Practice 2A-WSD, *Recommended Practice for Planning, Designing and Constructing Fixed Offshore Platforms—Working Stress Design*

API Recommended Practice 2RD, *Design of Risers for Floating Production Systems (FPSs) and Tension Leg Platforms*

API Specification 5L/ISO 3183, *Specification for Line Pipe*

API Recommended Practice 5L1, *Recommended Practice for Railroad Transportation of Line Pipe*

API Specification 6A/ISO 10423, *Specification for Wellhead and Christmas Tree Equipment*

API Specification 6D/ISO 14313, *Specification for Pipeline Valves*

API Recommended Practice 14C, *Recommended Practice for Analysis, Design, Installation, and Testing of Basic Surface Safety Systems for Offshore Production Platforms*

API Recommended Practice 14E, *Recommended Practice for Design and Installation of Offshore Production Platform Piping Systems*

API Standard 1104, *Welding of Pipelines and Related Facilities*

API Recommended Practice 1110, *Pressure Testing of Steel Pipelines for the Transportation of Gas, Petroleum Gas, Hazardous Liquids, Highly Volatile Liquids or Carbon Dioxide*

API Publication 2200, *Repairing Crude Oil, Liquor, Petroleum Gas, and Product Pipelines*

API Recommended Practice 2201, *Safe Hot Tapping Practices in the Petroleum & Petrochemical Industries*

AGA¹, *Submarine Pipeline On-Bottom Stability Analysis and Design Guidelines*

ASME B16.5², *Pipe Flanges and Flanged Fittings NPS 1/2 Through NPS 24 Metric/Inch Standard*

ASME B16.47, *Large Diameter Steel Flanges NPS 26 Through NPS 60*

ASME B31G, *Manual for Determining the Remaining Strength of Corroded Pipelines*

ASME B31.4, *Pipeline Transportation Systems for Liquid Hydrocarbons and Other Liquids*

ASME B31.8, *Gas Transmission and Distribution Piping Systems*

ASME Boiler and Pressure Vessel Code (BPVC), *Section IX: Welding and Brazing Qualifications*

ASQC Z1.9:2003³, *Sampling Procedures and Tables for Inspection by Variables for Percent Nonconforming*

¹ American Gas Association, 1515 Wilson Boulevard, Arlington, Virginia 22209, www.aga.org.

² American Society of Mechanical Engineers, 3 Park Avenue, New York, New York 10017, ASME International, 3 Park Avenue, New York, New York 10016-5990, www.asme.org.

³ American Society for Quality Control, 611 East Wisconsin Avenue, Milwaukee, Wisconsin 53202, www.asq.org.

AWS D3.6M⁴, *Specification for Underwater Welding*

DNV-RP-F105:February 2006⁵, *Free Spanning Pipelines*

DOE⁶, *Offshore Installations: Guidance on Design, Construction, and Certification*

MSS SP-44⁷, *Steel Pipeline Flanges*

NACE SP 0106:2006⁸, *Control of Internal Corrosion in Steel Pipelines and Piping Systems*

NACE SP 0607:2007/ISO 15589-2 (MOD), *Petroleum and natural gas industries—Cathodic protection of pipeline transportation systems*

OMAE '85⁹, Murphey, C. E., and Langner C. G., "Ultimate Pipe Strength Under Bending, Collapse, and Fatigue," Proceedings, Vol. 1, pp. 467 to 477

Title 30 *Code of Federal Regulations (CFR) Part 250, Subpart J*¹⁰, *Pipelines and Pipeline Rights-of-Way*

Title 49 *Code of Federal Regulations (CFR) Part 192, Transportation of Natural and Other Gas by Pipeline: Minimum Safety Standards*

Title 49 *Code of Federal Regulations (CFR) Part 195, Transportation of Hazardous Liquids by Pipeline*

3 Terms, Definitions, Acronyms, Abbreviations, and Symbols

3.1 Terms and Definitions

For the purposes of this document, the following definitions apply.

3.1.1

design pressure

The maximum difference, at each cross section, between internal pressure and external pressure during operating conditions.

NOTE Section 4.3.1 sets limits on design pressure.

3.1.2

extreme loads

Loads that are unlikely to be exceeded during the lifetime of the pipeline.

3.1.3

gas

A hydrocarbon in a vapor phase.

⁴ American Welding Society, Inc., P.O. Box 351040, 550 NW Le Jeune Road, Miami, Florida 33135, www.aws.org.

⁵ Det Norske Veritas, Veritasveien, 1, N-1322 Hovik, Norway, www.dnv.com.

⁶ Department of Energy, Petroleum Engineering Division, 1 Palace St., London, SW1E 5HE, United Kingdom, www.hss.doe.gov.
Manufacturers Standardization Society of the Valve & Fittings Industry, Inc., 127 Park Street, NE, Vienna, Virginia 22180, www.mss-hq.com.

⁸ National Association of Corrosion Engineers International, 1440 South Creek Drive, Houston, Texas 77084, www.nace.org.

⁹ Offshore Mechanics and Arctic Engineering Symposium, ASME International, 3 Park Avenue, New York, New York 10016-5990, www.asme.org.

¹⁰ The *Code of Federal Regulations* is available from the U.S. Government Printing Office, Washington, DC 20402.