

Specification for Subsea Umbilicals

API SPECIFICATION 17E
FIFTH EDITION, JULY 2017

EFFECTIVE DATE: JANUARY 15, 2018



AMERICAN PETROLEUM INSTITUTE

Special Notes

API publications necessarily address problems of a general nature. With respect to particular circumstances, local, state, and federal laws and regulations should be reviewed.

Neither API nor any of API's employees, subcontractors, consultants, committees, or other assignees make any warranty or representation, either express or implied, with respect to the accuracy, completeness, or usefulness of the information contained herein, or assume any liability or responsibility for any use, or the results of such use, of any information or process disclosed in this publication. Neither API nor any of API's employees, subcontractors, consultants, or other assignees represent that use of this publication would not infringe upon privately owned rights.

API publications may be used by anyone desiring to do so. Every effort has been made by the Institute to assure the accuracy and reliability of the data contained in them; however, the Institute makes no representation, warranty, or guarantee in connection with this publication and hereby expressly disclaims any liability or responsibility for loss or damage resulting from its use or for the violation of any authorities having jurisdiction with which this publication may conflict.

API publications are published to facilitate the broad availability of proven, sound engineering and operating practices. These publications are not intended to obviate the need for applying sound engineering judgment regarding when and where these publications should be utilized. The formulation and publication of API publications is not intended in any way to inhibit anyone from using any other practices.

Any manufacturer marking equipment or materials in conformance with the marking requirements of an API standard is solely responsible for complying with all the applicable requirements of that standard. API does not represent, warrant, or guarantee that such products do in fact conform to the applicable API standard.

All rights reserved. No part of this work may be reproduced, translated, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from the publisher. Contact the Publisher, API Publishing Services, 1220 L Street, NW, Washington, DC 20005.

Copyright © 2017 American Petroleum Institute

Foreword

This standard was developed as an API recommended practice under the jurisdiction of the API Upstream Segment Executive Committee on Drilling and Production Operations.

Standards referenced herein may be replaced by other international or national standards that can be shown to meet or exceed the requirements of the referenced standard.

This standard is under the jurisdiction of API Subcommittee 17 on Subsea Production Systems. Nothing contained in any API publication is to be construed as granting any right, by implication or otherwise, for the manufacture, sale, or use of any method, apparatus, or product covered by letters patent. Neither should anything contained in the publication be construed as insuring anyone against liability for infringement of letters patent.

This is the Fifth Edition.

API Subcommittee 17 documents consist of the following:

- Recommended Practice 17A, *Design and Operation of Subsea Production Systems—General Requirements and Recommendations*
- Recommended Practice 17B, *Recommended Practice for Flexible Pipe*
- Specification 17D, *Specification for Subsea Wellhead and Christmas Tree Equipment*
- Specification 17E, *Specification for Subsea Umbilicals*
- Standard 17F, *Specification for Subsea Production Control Systems*
- Recommended Practice 17G, *Recommended Practice for Completion/Workover Riser Systems*
- Recommended Practice 17H, *Remotely Operated Tools and Interfaces on Subsea Production Systems*
- Specification 17J, *Specification for Unbonded Flexible Pipe*
- Specification 17K, *Specification for Bonded Flexible Pipe*
- Specification 17L1, *Specification for Flexible Pipe Ancillary Equipment*
- Recommended Practice 17L2, *Recommended Practice for Flexible Pipe Ancillary Equipment*
- Recommended Practice 17N, *Recommended Practice for Subsea Production System Reliability and Technical Risk Management*
- Standard 17O, *Standard for Subsea High Integrity Pressure Protection Systems (HIPPS)*
- Recommended Practice 17P, *Design and Operation of Subsea Production Systems—Subsea Structures and Manifolds*
- Recommended Practice 17Q, *Recommended Practice for Subsea Equipment Qualification—Standardized Process for Documentation*
- Recommended Practice 17R, *Recommended Practice for Flowline Connectors and Jumpers*

- Recommended Practice 17S, *Recommended Practice for Design, Testing and Operation of Subsea Multiphase Flow Meters*
- Recommended Practice 17U, *Recommended Practice for Wet and Dry Thermal Insulation of Subsea Flowlines and Equipment*
- Recommended Practice 17V, *Recommended Practice for Subsea Safety*
- Recommended Practice 17W, *Recommended Practice for Subsea Capping Stacks*
- TR 17TR1, *Evaluation Standard for Internal Pressure Sheath Polymers for High Temperature Flexible Pipes*
- TR 17TR2, *The Ageing of PA-11 in Flexible Pipes*
- TR 17TR3, *An Evaluation of the Risks and Benefits of Penetrations in Subsea Wellheads Below the BOP Stack*
- TR 17TR4, *Subsea Equipment Pressure Ratings*
- TR 17TR5, *Avoidance of Blockages in Subsea Production Control and Chemical Injection Systems*
- TR 17TR6, *Attributes of Production Chemicals in Subsea Production Systems*
- TR 17TR8, *High-pressure High-temperature Design Guidelines*
- TR 17TR10, *Subsea Umbilical Termination (SUT) Design Recommendations*
- TR 17TR11, *Pressure Effects on Subsea Hardware during Flowline Pressure Testing in Deep Water*
- TR 17TR12, *Consideration of External Pressure in the Design and Pressure Rating of Subsea Equipment*

This document was produced under API standardization procedures that ensure appropriate notification and participation in the developmental process and is designated as an API standard. Questions concerning the interpretation of the content of this publication, or comments and questions concerning the procedures under which this publication was developed should be directed in writing to the Director of Standards, American Petroleum Institute, 1220 L Street, NW, Washington, DC 20005. Requests for permission to reproduce or translate all or any part of the material published herein should also be addressed to the director.

Generally, API standards are reviewed and revised, reaffirmed, or withdrawn at least every five years. A one-time extension of up to two years may be added to this review cycle. Status of the publication can be ascertained from the API Standards Department, telephone (202) 682-8000. A catalogue of API publications and materials is published annually by API, 1220 L Street, NW, Washington, DC 20005.

Suggested revisions are invited and should be submitted to the Standards Department, API, 1220 L Street, NW, Washington, DC 20005, standards

Contents

	Page
1 Scope	1
2 Normative References	1
3 Terms, Abbreviated Terms, and Definitions	3
3.1 Terms and Definitions	3
3.2 Abbreviated Terms	10
4 Functional Requirements	11
4.1 General Requirements	11
4.2 Project-specific Requirements	12
5 Safety, Design and Testing Philosophy	12
5.1 Application	12
5.2 Safety Objective	12
5.3 Systematic Review	12
5.4 Fundamental Requirements	12
5.5 Design Philosophy	13
5.6 Testing	14
6 Design Requirements	15
6.1 General	15
6.2 Loads	15
6.3 Load Effect Analysis	19
6.4 Electrical System Analysis	25
6.5 Thermal Analysis	26
6.6 Installation Analysis	27
6.7 Fatigue Life	27
7 Component Design, Manufacture, and Test	27
7.1 General	27
7.2 Electric Cables	28
7.3 Hoses	43
7.4 Optical-fiber Cable	53
7.5 Metallic Tubes	57
8 Terminations and Ancillary Equipment Design	73
8.1 Design Principles	73
8.2 Design Process	74
8.3 Tube and Hose Terminations	74
8.4 Cable Terminations	75
8.5 Pull-in Head	76
8.6 Topside Hang-off	76
8.7 Subsea Termination Interface	77
8.8 Subsea Umbilical Connection	77
8.9 Bend Restrictors	77
8.10 Load Stiffeners	78
8.11 Ancillary Equipment	78
9 Umbilical Design	81
9.1 Temperature Range	81
9.2 Maximum Tensile Load	81
9.3 Ultimate Tensile Load	81

Contents

	Page
9.4 Minimum Bend Radius	81
9.5 Cross-sectional Arrangement	81
9.6 Lay-up	81
9.7 Sub-bundles	82
9.8 Inner Sheath	82
9.9 Armoring	83
9.10 Outer Sheath	83
9.11 Length Marking	83
10 Umbilical Manufacture and Test	84
10.1 Umbilical Manufacture	84
10.2 Qualification and Verification Tests	86
11 Factory Acceptance Tests	87
11.1 General	87
11.2 Visual and Dimensional Inspection	87
11.3 LV Electric Cable	87
11.4 MV Electric Cable	88
11.5 Optical-fiber Cables	88
11.6 Trial Termination Fit-up	88
11.7 Hoses	89
11.8 Tubes	89
11.9 Functional Component Continuity Check	89
11.10 Electrical Continuity at the Termination	89
12 Storage	89
12.1 General	89
12.2 Protection of Unterminated Umbilical Components	90
12.3 Spare Length	90
12.4 Repair Kits	90
12.5 Handling for Integration Tests	90
13 Pre-installation Activity	90
13.1 Umbilical Information	90
13.2 Route Information	91
13.3 Terminations and Auxiliary Equipment Information	92
13.4 Host Facility Information	92
13.5 Subsea Structure Information	93
13.6 Host Facility Visit	93
14 Load-out	93
14.1 General	93
14.2 Technical Audit of Load-out Facilities	93
14.3 Load-out Procedure	94
14.4 Pre-load-out Meetings	94
14.5 Pre-load-out Tests	95
14.6 Load-out Operation	96
14.7 Stopping and Starting the Load-out	96
14.8 Handling of the Umbilical	96
14.9 Load-out Monitoring	97
14.10 Load-out on a Reel or Carousel	98

Contents

	Page
14.11 Post-load-out Tests	98
15 Installation Operations	98
15.1 Requirements for Installation Vessel and Equipment	99
15.2 Pre-installation Survey	100
15.3 I-tube or J-tube Pull-in Operations	103
15.4 Lay-down of Subsea Termination (First End)	103
15.5 Lay Route	103
15.6 Handling Requirements for the Main Lay	103
15.7 Vessel Positioning to Achieve Required Touch-down	104
15.8 Control and Monitoring of Length Laid	104
15.9 Integrity Monitoring During Lay	105
15.10 Burial Operations	106
15.11 Approach to Subsea Termination Position (Second End)	107
15.12 Lay-down of Subsea Termination	107
15.13 Pull-in of Subsea Termination with Mating Plates	108
15.14 Pipeline Crossings	108
15.15 Buoyancy Attachments	108
15.16 Arming of the Weak Link	109
15.17 Post-lay Survey	109
15.18 Post-burial Survey	109
15.19 Post-pull-in Test	109
15.20 Post-hook-up Test	110
15.21 Retrieval of Installation Aids	110
15.22 Contingencies	110
15.23 Repairs	111
15.24 Post-installation Survey	111
Bibliography	166
Annex A (informative) API Monogram Program—Use of the API Monogram by Licensees	112
Annex B (informative) Information Provided in a Purchaser's Functional Specification	116
Annex C (informative) Load Effect Analysis	123
Annex D (informative) Umbilical Testing	134
Annex E (normative) Fatigue Testing	139
Annex F (informative) Hose and Tube Preferred Sizes	141
Annex G (normative) Characterization Tests for Hoses and Umbilicals, Including Hoses	142
Annex H (normative) Buckling of Metallic Tubes	146
Annex I (informative) Tube Material Matrix	148
Annex J (informative) Umbilical Full-scale Tests	160
Figures	
Capacity Curves	4
C.1 Schematic Presentation of Fatigue Analysis Strategies	126
C.2 Representative Example of Measured Bending Hysteresis	130
G.1 Proof Pressure/Decay Test Arrangement	143

Contents

	Page
G.2 Schematic Arrangement of Test Setup for Dynamic Response of Hoses	144
Tables	
1 Load Combinations	18
2 Load-Effect Analysis	20
3 Nominal Bore and Wall Thickness Tolerances	43
4 Concentricity	43
5 Ratios of Test Pressure to DP	45
6 Wall Thickness for Stress Calculations	58
7 Utilization Factors	59
8 Tubes Testing	69
9 Dimensional Tolerances	70
B.1 Design Criteria for Umbilical Components	119
B.2 Activities and Responsibilities	121
C.1 Structural Analysis Approaches	125
C.2 Qualification of Structural Analysis Methods	125
C.3 Dynamic FE Analysis Techniques	128
C.4 Validation Analysis Method Overview	129
D.1 LV Electric Cables/Electric Cable Elements	134
D.2 MV Electric Cables/Electric Cable Elements	135
D.3 Optical-fiber Cables	135
D.4 Hoses	136
D.5 Tubes	136
D.6 Umbilicals	137
D.7 Electric Cables	137
D.8 Optical Fibers	138
D.9 Hoses	138
D.10 Tubes	138
E.1 Typical Test Matrix for Flex-fatigue Testing of a Dynamic Umbilical	140
F.1 Preferred Hose Size/Pressure Ratings	141
F.2 Preferred Tube Size	141
H.1 Utilization Factors	146
H.2 Utilization Factors	147
I.1 Tube Material Matrix	148
J.1 Umbilical Full-scale Tests	160

Introduction

This document is based on API Specification 17E, Fourth Edition, which superseded previous versions of API 17E and API RP 17I, First Edition.

It is important that users of this document be aware that further or differing requirements can be needed for individual applications. This document is not intended to inhibit a vendor from offering, or the purchaser from accepting, alternative equipment engineering solutions for the individual application. This can be particularly applicable if there is innovative or developing technology. If an alternative is offered, it is the responsibility of the vendor to identify any variations from this document and provide details.

Within this document, "shall" is used to state that a provision is mandatory; "should" is used to state that a provision is not mandatory, but is recommended as good practice; and "may" is used to state that a provision is optional.

Système International (SI) units are identified first when cited in the document. United States Customary (USC) units may be given in parentheses after the SI units.

Specification for Subsea Umbilicals

1 Scope

This document specifies requirements and gives recommendations for the design, material selection, manufacture, design verification, testing, installation, and operation of umbilicals and associated ancillary equipment for the petroleum and natural gas industries. Ancillary equipment does not include topside hardware. Topside hardware refers to any hardware that is not permanently attached to the umbilical, above the topside hang-off termination.

This document applies to umbilicals containing components, such as electrical cables, optical fibers, thermoplastic hoses, and metallic tubes, either alone or in combination.

This document applies to umbilicals for static or dynamic service, with surface–surface, surface–subsea, and subsea–subsea routings.

This document does not apply to the associated component connectors, unless they affect the performance of the umbilical or that of its ancillary equipment.

This document applies only to tubes with the following dimensions:

- wall thickness, $t < 6 \text{ mm}$ (0.2 in.);
- internal diameter, $ID < 50.8 \text{ mm}$ (2 in.).

NOTE Tubular products with dimensions greater than these can be regarded as pipeline/line pipe, and therefore designed and manufactured according to a recognized pipeline/line pipe standard.

This document does not apply to a tube or hose rated lower than 7 MPa (1015 psi).

This document applies to electrical cables rated voltages from 1kV ($U_m = 1.2\text{kV}$) up to 30kV ($U_m = 36\text{kV}$).

If a product is supplied bearing the API Monogram and manufactured at a facility licensed by API, the requirements of Annex A apply.

2 Normative References

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

API RP 17.1, *Remotely Operated Tools and Interfaces on Subsea Production Systems*

ASTM A240/A240M, *Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications*

ASTM A370, *Standard Test Methods and Definitions for Mechanical Testing of Steel Products*

ASTM A480/A480M, *Standard Specification for General Requirements for Flat-Rolled Stainless and Heat-Resisting Steel Plate, Sheet, and Strip*

ASTM A789/A789M, *Standard Specification for Seamless and Welded Ferritic/Austenitic Stainless Steel Tubing for General Service*

ASTM A1016/A1016M-04A, *Standard Specification for General Requirements for Ferritic Alloy Steel, Austenitic Alloy Steel and Stainless Steel Tubes*

ASTM E8/E8M, *Standard Test Methods for Tension Testing of Metallic Materials*

ASTM E92, *Standard Test Method for Vickers Hardness and Knoop Hardness of Metallic Materials*

ASTM E213, *Standard Practice for Ultrasonic Testing of Metal Pipe and Tubing*

ASTM E273, *Standard Practice for Ultrasonic Testing of the Weld Zone of Welded Pipe and Tubing*

ASTM E309, *Standard Practice for Eddy Current Examination of Steel Tubular Products Using Magnetic Saturation*

ASTM E384, *Standard Test Method for Microindentation Hardness of Materials*

ASTM E426, *Standard Practice for Electromagnetic (Eddy Current) Examination of Seamless and Welded Tubular Products, Austenitic Stainless Steel and Similar Alloys*

ASTM E562, *Standard Test Method for Determining Volume Fraction by Systematic Manual Point Count*

ASTM E1001, *Standard Practice for Detection and Evaluation of Discontinuities by the Immersed Pulse-Echo Ultrasonic Method Using Longitudinal Waves*

ASTM E1245, *Standard Practice for Determining the Inclusion or Second-Phase Constituent Content of Metals by Automatic Image Analysis*

ASTM G48-11, *Standard Test Methods for Pitting And Crevice Corrosion Resistance of Stainless Steels and Related Alloys by Use of Ferritic Chloride Solution*

DNV-OS-H205, *Lifting Operations (VMO Standard—Part 2–5)*

DNV-RP-B401, *Cathodic Protection Design*

EN 10204:2004, *Metallic products — Types of inspection documents*

IECA S-97-682, *Standard for Utility Shielded Power Cables Rated 5 Through 46 kV*

IEC 60228, *Conductors of insulated cables*

IEC 60502-1, *Power cables with extruded insulation and their accessories for rated voltages from 1 kV ($U_m = 1,2$ kV) up to 30 kV ($U_m = 36$ kV) — Part 1: Cables for rated voltages of 1 kV ($U_m = 1,2$ kV) and 3 kV ($U_m = 3,6$ kV)*

IEC 60502-2, *Power cables with extruded insulation and their accessories for rated voltages from 1 kV ($U_m = 1,2$ kV) up to 30 kV ($U_m = 36$ kV) — Part 2: Cables for rated voltages from 6 kV ($U_m = 7,2$ kV) up to 30 kV ($U_m = 36$ kV)*

IEC 60793-1-1, *Optical fibers — Part 1-1: Measurement methods and test procedures — General and guidance*

IEC 60793-2, *Optical fibers — Part 2: Product specifications — General*

IEC 60794-1-21, *Optical fiber cables - Part 1-21: Generic specification — Basic optical cable test procedures — Mechanical test methods*

IEC 62230, *Electric cables — Spark-test method*

ISO 527 (all parts), *Plastics — Determination of tensile properties*

ISO 1402, *Rubber and plastics hoses and hose assemblies — Hydrostatic testing*

ISO 4080, *Rubber and plastics hoses and hose assemblies — Determination of permeability to gas*

ISO 4406, *Hydraulic fluid power — Fluids — Method for coding the level of contamination by solid particles*

ISO 6801, *Rubber or plastics hoses — Determination of volumetric expansion*

ISO 6803:2008, *Rubber or plastics hoses and hose assemblies — Hydraulic-pressure impulse test without flexing*

ISO 7751, *Rubber and plastics hoses and hose assemblies — Ratios of proof and burst pressure to design working pressure*

ISO 8308, *Rubber and plastics hoses and tubing — Determination of transmission of liquids through hose and tubing walls*

ISO 10619-2:2011, *Rubber and plastics hoses and tubing — Measurement of flexibility and stiffness — Part 2: Bending tests at sub-ambient temperatures*

ITU-T G.652, *Characteristics of a single-mode optical fibre cable*

ITU-T G.654, *Characteristics of a cut-off shifted single-mode optical fibre cable*

ITU-T G.976, *Test methods applicable to optical fiber submarine cable systems*

3 Terms, Abbreviated Terms, and Definitions

3.1 Terms and Definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1

accidental load

Loads caused directly or indirectly by unplanned activities. Accidental loads shall be understood as loads to which the umbilical can be subjected in case of abnormal conditions, incorrect operation, or technical failure as defined by purchaser

3.1.2

allowable bend radius

Minimum radius to which an umbilical, at a given tension, may be bent to without infringing design criteria or suffering loss of performance

See Figure 1.

NOTE 1 The bend radius is measured to the centerline of the umbilical.

NOTE 2 Allowable bend radius increases with increasing tensile load and varies depending on internal pressure and condition, i.e. safety level.

NOTE 3 Increasing the level of safety generally increases the allowable bend radius and decreases the allowable tensile load, i.e. moves the capacity curves toward origin.

NOTE 4 Increasing the internal pressure generally increases the allowable bend radius and decreases the allowable tensile load, i.e. moves the capacity curves toward origin.

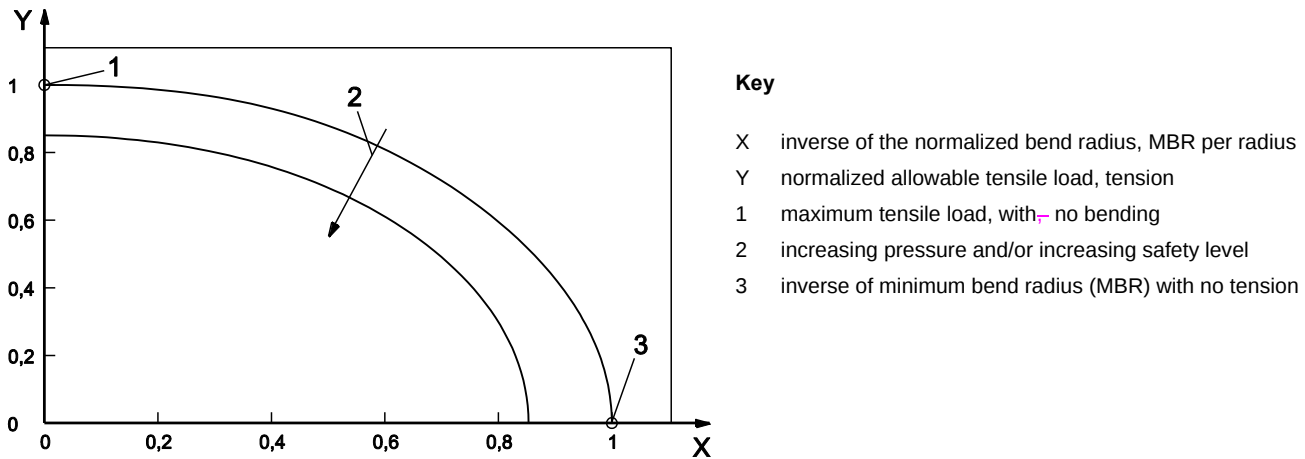


Figure 1—Capacity Curves

3.1.3 allowable tensile load

Maximum tensile load that an umbilical, at a given bend radius, can be loaded to without infringing design criteria or suffering loss of performance.

See Figure 1.

NOTE Allowable tensile load decreases with decreasing bend radius and varies depending on internal pressure and condition, i.e. safety level.

3.1.4 ancillary equipment

Accessory to the umbilical system that does not form part of the main functional purpose.

EXAMPLES Weak link, buoyancy attachments, I-tube or J-tube seals, VIV strakes, centralizers, anchors, external clamps.

3.1.5 bend restrictor

Device for limiting the bend radius of the umbilical by mechanical means.

NOTE 1 A bend restrictor typically is comprised of a series of interlocking metallic or molded rings, applied over the umbilical.

NOTE 2 It is sometimes referred to as a bend limiter.

3.1.6 bend stiffener

Device for providing a localized increase in bending stiffness, preserving the minimum bend radius of the umbilical under defined bending moment conditions.

NOTE The stiffener is usually a molded device, sometimes reinforced, depending on the required duty, applied over the umbilical. It is sometimes referred to as a bend strain reliever (BSR).

3.1.7 bird-caging

Phenomenon whereby armor wires locally rearrange with an increase and/or decrease in pitch-circle diameter as a result of accumulated axial and radial stresses in the armor layer(s).