

1991 ED.

AS 1056.1—1985
UDC 621.365:683.97

Australian Standard[®] 1056.1—1985

Amdt 1 - 1986
Amdt 2 - 1987
Amdt 3 - 1988-04-05

STORAGE WATER HEATERS Part 1—GENERAL REQUIREMENTS



1056 Storage water heaters
1056.1—1985 General requirements
(In Professional Package 50E) A4 23pp G

Specifies general construction and performance requirements for electric storage water heaters of 25 L to 630 L rated hot water delivery. (Requirements for gas water heaters are specified only by reference to Code AG 102 published by AGA/ALPGA.) To be read in conjunction with AS 1056.2 or AS 1056.3 as appropriate.

Committee EL/20. Supersedes AS 1056.1—1985. Publication date 1985-04-05.
ISBN 0 7262 6812 7.

[Title allocated by the Reference Cataloguing Authority:
HEATER, WATER, ELECTRIC (Storage Type, General Requirements)
NSC 4410, 4520]



STANDARDS ASSOCIATION OF AUSTRALIA
Incorporated by Royal Charter

This Australian standard was prepared by Committee EL/20, Electric Water Heating Appliances. It was approved on behalf of the Council of the Standards Association of Australia on 12 February 1985 and published on 10 May 1985.

The following interests are represented on Committee EL/20:

- Australian Consumers Association
 - Australian Electrical and Electronic Manufacturers' Association
 - Australian Gas Association
 - Confederation of Australian Industry
 - Electricity Supply Association of Australia
 - Engineering and Water Supply Department, South Australia
-

Review of Australian Standards. To keep abreast of progress in industry, Australian standards are subject to periodic review and are kept up-to-date by the issue of amendments or new editions as necessary. It is important therefore that standards users ensure that they are in possession of the latest edition, and any amendments thereto.

Full details of all SAA publications will be found in the Catalogue of SAA Publications; this information is supplemented each month by SAA's journal 'The Australian Standard', which subscribing members receive, which gives details of new publications, new editions and amendments, and of withdrawn standards.

Suggestions for improvements to Australian standards, addressed to the head office of the Association, are welcomed. Notification of any inaccuracy or ambiguity found in an Australian standard should be made without delay in order that the matter may be investigated and appropriate action taken.

This standard was issued in draft form for comment as DR 84054.

STANDARDS ASSOCIATION OF AUSTRALIA
Incorporated by Royal Charter

AMENDMENT No 3
to
AS 1056.1—1985
STORAGE WATER HEATERS
Part 1: GENERAL REQUIREMENTS

REVISED TEXT

The 1985 edition of AS 1056.1 which was amended in March 1986 and March 1987 is further amended as follows; the amendments should be inserted in the appropriate place.

SUMMARY: The following sections of the standard are covered by this Amendment: Clauses 3.1.1 and 5.2.

Published on 5 April 1988.

AMDT
No 3
APR.
1988

Page 12. Clause 3.1.1.

In line 4, *add* an additional value: '6000'.

AMDT
No 3
APR.
1988

Page 15. Clause 5.2.

Add a new Item (g).

- (g) If the water heater is fitted with an anode, a warning statement along the following lines:
- 'If the hot water system is not used for two weeks or more, a quantity of hydrogen gas which is highly flammable may accumulate in the water heater. To dissipate this gas safely, it is recommended that a hot tap be turned on for several minutes at a sink, basin, or bath, but not at a dishwasher, clothes washer, or other appliance. During this procedure there must be no smoking, open flame, or any electrical appliance operating nearby. If hydrogen is discharged through the tap, it will probably make an unusual sound as with air escaping.'
-

STANDARDS ASSOCIATION OF AUSTRALIA
Incorporated by Royal Charter

AMENDMENT No 2
to
AS 1056.1—1985
STORAGE WATER HEATERS
Part 1—GENERAL REQUIREMENTS

REVISED TEXT

The 1985 edition of AS 1056.1 which was amended in March 1986, is further amended as follows: the amendments should be inserted in the appropriate place.

SUMMARY: The following sections of this standard are covered by this amendment: Clauses 1.2, 3.2.1, 3.2.2 and 3.2.3.

Published on 2 March 1987.

AMDT
No 2
MAR.
1987

Page 5. Clause 1.2.

Add the following Note at the end of the clause:

NOTE: A number of electricity supply authorities specify compliance with various performance and construction requirements of this standard in order that the water heater be eligible for supply under certain tariffs.

AMDT
No 2
MAR.
1987

Page 12. Clause 3.2.1.

Delete the Note at the end of the clause.

AMDT
No 2
MAR.
1987

Pages 12 and 13. Clause 3.2.2.

Line 4. *Delete* '50°C' and *substitute* '60°C'.

Paragraph 2. *Delete* the line in bold type (but retain the Note).

AMDT
No 2
MAR.
1987

Page 13. Clause 3.2.3.

Title. *Delete* clause title and *substitute*.

3.2.3 Thermostat settings.

Note 2. *Delete* first three lines and *substitute*:

2. It is recommended that thermostats be set at not less than 60°C. The following points should be considered:

Add a new item (d):

- (d) A minimum setting (cut-out) temperature of 60°C is recommended on the advice of the Department of Health, N.S.W., that Legionella bacteria do not survive in temperatures above 55°C. A thermostat set to 60°C could have a cut-in temperature of about 55°C.

STANDARDS ASSOCIATION OF AUSTRALIA
Incorporated by Royal Charter

AMENDMENT No 1
to
AS 1056.1—1985
STORAGE WATER HEATERS
Part 1—GENERAL REQUIREMENTS

REVISED TEXT

The 1985 edition of AS 1056.1 is amended as follows; the amendments should be inserted in the appropriate places.

SUMMARY: The following sections of the standard are covered by this amendment: Clauses 2.3 and 5.1.1, Appendices B4.4, B6, B8, C4.6 and D.

Published on 3 March 1986.

AMDT No 1
MAR. 1986

Page 10. Clause 2.3.
Item (b). *Delete* '10 μm ' and *substitute* '100 μm '.

AMDT No 1
MAR. 1986

Page 15. Clause 5.1.1.
Item (d). *Delete* text and *replace* with the following:
'Recommended maximum setting in degrees Celsius (see Clause 3.2.3).'

AMDT No 1
MAR. 1986

Page 18. Appendix B. Paragraph B4.4.
Item (a). *Delete* text in parentheses and *replace* with the following:
'(see Clause 5.1.1(d))'
Item (b). In the equation, *insert* 'maximum' after 'Recommended'.
Delete the last sentence and *replace* with the following:
'If the thermostat cannot maintain the above-specified temperature, a suitably calibrated control shall be used.'

AMDT No 1
MAR. 1986

Page 19. Appendix B. Paragraph B6.
Line 3 (equation). *Insert* after 'Heat loss' the words 'per 24 h'.
Line 6 (explanation of symbol 'T'). *Delete* and *replace* with the following:
'T = manufacturer's recommended maximum thermostat setting (see Clause 5.1.1(d)), in degrees Celsius, or 75°C, whichever is the greater'

AMDT
No 1
MAR.
1986

Page 19. Appendix B.

Insert a new Paragraph B8.

B8 EXAMPLES.

Example 1 : 250 L water heater with attached feed tank; manufacturer's recommended maximum thermostat setting = 65°C.

Test

conditions : $T_A = 22^\circ\text{C}$
 $T_W = 74^\circ\text{C}$

(Check) : $T_W - T_A = 52^\circ\text{C}$ (which complies with Paragraph B4.4(a))
: $t = 28$ h
: $E = 4.17$ kW.h
: $T = 75$ (not 65—see Paragraph B6)

Calculation : (from equation in Paragraph B6)

Heat loss
per 24 h = $\frac{24 (75 - 20) 4.17}{28 (52)}$

= 3.78 kW

(The result should be checked against the appropriate value in Table 2.1, column 2.)

NOTE: This result exceeds the maximum value (3.7kW.h/24h) applicable from 30 June 1986.

Example 2 : 125 L water heater without feed tank; manufacturer's recommended maximum thermostat setting = 85°C.

Test

conditions : $T_A = 19^\circ\text{C}$
 $T_W = 87^\circ\text{C}$

(Check) : $T_W - T_A = 68^\circ\text{C}$ (which complies with Paragraph B4.4(a))
: $t = 26$ h
: $E = 2.81$ kW.h
: $T = 85$

Calculation : (from equation in Paragraph B6)

Heat loss
per 24 h = $\frac{24 (85 - 20) 2.81}{26 (68)}$

= 2.48 kW

(The result should be checked against the appropriate value in Table 2.1, column 3.)

AMDT
No 1
MAR.
1986

Page 21. Appendix C. Paragraph C4.6.

Delete the last sentence and replace with the following:

'If the thermostat cannot maintain the above-specified temperature, a suitably calibrated control shall be used.'


AMDT
No 1
MAR.
1986

Page 24. Appendix D.

Insert a new second item (after 'Nominal temperature setting:'):

'Manufacturer's recommended maximum setting (see Clause 5.1.1(d)):'

AUSTRALIAN STANDARD

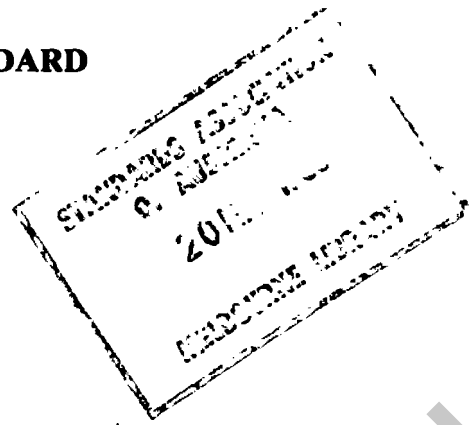

STORAGE WATER HEATERS Part 1 GENERAL REQUIREMENTS

AS 1056.1—1985

First published (as AS C316)	1957
Revised	1965
Revised	1970
AS 1056 first published	1972
Revised	1977
AS 1056.1 first published	1985

PUBLISHED BY THE STANDARDS ASSOCIATION OF AUSTRALIA
STANDARDS HOUSE, 80 ARTHUR ST, NORTH SYDNEY, N.S.W.

ISBN 0 7262 3731 0

PREFACE

This standard was prepared by the Association's Committee on Electric Water Heating Appliances, to supersede (in part) AS 1056—1977, Automatic Electric Storage Water Heaters with Hot Water Deliveries Ranging from 25 Litres to 630 Litres. It is one of a series of standards covering storage water heaters, the other standards in the series being as follows:

- AS 1056.2 Storage Water Heaters, Part 2—Specific Requirements for Water Heaters with Single Shells
- AS 1056.3 Storage Water Heaters, Part 3—Specific Requirements for Water Heaters with Composite Shells.

Other standards dealing with water heaters are as follows:

- AS 1308 Thermostats and Over-temperature Energy Cutouts for Automatic Electric Water Heaters
- AS 1357 Water Fittings for Protection and Control of Unvented Storage Water Heaters
- AS 1361 Automatic Electric Heat Exchange Water Heaters
- AS 1529 Code of Practice for Installation of Household Type Hot Water Supply Systems
- AS 2002 The Installation of Household Type Solar Hot Water Supply Systems
- AS 2123 Slow-delivery Type Automatic Electric Storage Water Heaters for Dairies
- AS 2712 Solar Water Heaters—Design and Construction

This standard differs from AS 1056—1977 in the following respects:

- (a) The scope has been extended to include Class A gas-fired storage water heaters which are specified by reference to codes published by the Australian Gas Association and the Australian Liquefied Petroleum Gas Association.
- (b) All gaskets in electric water heaters are required to withstand 85°C (see Clause 3.1.2.3).
- (c) As a means of energy conservation, and with effect from 30 June 1986—
 - (i) allowable heat losses in electric water heaters are to be reduced (see Table 2.1); and
 - (ii) electric water heaters are to be fitted with means for the user to adjust the water temperature; alternatively water heaters are to be capable of modification by means of kits to achieve the same result (see Clause 3.2.2).
- (d) Notes are provided concerning maximum thermostat settings (see Clause 3.2.3); however the relevant requirements and recommendations are given in AS 1056.2 and AS 1056.3. The risk of scalding in baths and showers is also mentioned in a note to Clause 2.3, however this matter is *outside the scope* of this standard.

This standard specifies that electric storage water heaters comply with AS 3142, Approval and Test Specification for Electric Water Heaters, which contains essential electrical safety requirements. Compliance with AS 3142 may also be required by electricity supply authorities as a condition for connection to their mains. For unvented electric water heaters, compliance with AS 3142 is legally enforced under approvals legislation enacted in all States. Water heaters may also be required to comply with requirements of Water Regulatory Authorities.

©Copyright — STANDARDS ASSOCIATION OF AUSTRALIA 1985

Users of standards are reminded that copyright subsists in all SAA publications. No part of this publication may be reproduced, stored in a retrieval system in any form or transmitted by any means without prior permission in writing of the Standards Association of Australia.

CONTENTS

	<i>Page</i>
SECTION 1. SCOPE AND GENERAL	
1.1 Scope	5
1.2 Application	5
1.3 Referenced Documents	5
1.4 Definitions	5
1.5 Compliance with Other Specifications	7
1.6 Rated Hot Water Delivery/Capacity	7
1.7 Facilities for Maintenance	8
1.8 Cleanliness in Manufacture	8
SECTION 2. CONSTRUCTIONAL REQUIREMENTS	
2.1 Fixing of Heating Units to Shell	9
2.2 Sacrificial Anode(s)	10
2.3 Fittings in Contact with Water	10
2.4 Thermal Insulation	10
2.5 Corset	11
2.6 Casing	11
2.7 Hydrostatic Overpressure Withstand	11
2.8 Pressure Fatigue Withstand (of an Unvented Container)	11
2.9 External Torque Withstand	11
SECTION 3. ELECTRICAL COMPONENTS	
3.1 Heating Units	12
3.2 Thermostats and Over-temperature Protective Devices	12
SECTION 4. FEED TANKS AND WATER FITTINGS	
4.1 Attached Feed Tank	14
4.2 Water Fittings	14
4.3 Water Pipes	14
4.4 Drainage Facilities.....	14
SECTION 5. MARKING AND INSTALLATION INSTRUCTIONS	
5.1 Marking	15
5.2 Instructions for Installation and Maintenance	15
SECTION 6. DETERMINATION OF COMPLIANCE	
6.1 Type Tests	16
6.2 Routine Tests	16
APPENDICES	
A Information to be Supplied with Enquiry and Order	17
B Method for the Determination of Heat Loss	18
C Method for the Determination of Hot Water Delivery	20
D Typical Product Specification for a Water Heater	22

(BLANK)

Currently in preview, click buy full version

STANDARDS ASSOCIATION OF AUSTRALIA

Australian Standard
for
STORAGE WATER HEATERS

PART 1—GENERAL REQUIREMENTS

SECTION 1. SCOPE AND GENERAL

1.1 SCOPE. This standard specifies requirements for:

- (a) Storage water heaters heated solely by electricity (hereinafter called 'water heaters') having rated hot water deliveries within the range 25 L to 630 L and having heating units of the tubular-sheathed immersion type or the bobbin type.

NOTE: Where non-electric supplementary heating, e.g. from a solar collector or a slow combustion stove, is used, additional requirements may be necessary.

- (b) Class A gas-fired water heaters by cross-reference to Codes AG 102 and AG 109 published by the Australian Gas Association and the Australian Liquefied Petroleum Gas Association (see Clauses 1.3.2 and 1.5.2).

This standard does not apply to heat-exchange water heaters (see AS 1361).

NOTES:

1. Water heaters having deliveries in excess of 630 L generally have special requirements. Intending purchasers of such water heaters are advised to include in their specification such requirements of this standard as are relevant to their needs.
2. For the installation of household type hot water systems, see AS 1529.
3. Information to be supplied with enquiries and orders for electric water heaters is given in Appendix A.

1.2 APPLICATION. Electric water heaters shall comply with the relevant requirements of this standard and with the requirements of the following standards, as applicable:

- (a) Water heaters with single shells AS 1056.2.
(b) Water heaters with composite shells AS 1056.3.
see Amdt 2 (1987)

1.3 REFERENCED DOCUMENTS.

1.3.1 Standards. The following standards are referred to in this standard:

- AS 1056.2 Storage Water Heaters, Part 2—Specific Requirements for Water Heaters with Single Shells
- AS 1056.3 Storage Water Heaters, Part 3—Specific Requirements for Water Heaters with Composite Shells
- AS 1308 Thermostats and Over-temperature Energy Cutouts for Automatic Electric Water Heaters
- AS 1361 Automatic Electric Heat Exchange Water Heaters
- AS 1432 Copper Tubes for Water, Gas and Sanitation

- AS 1529 Code of Practice for Installation of Household Type Hot Water Supply Systems
- AS 1566 Copper and Copper Alloy Plate, Rolled Bar, Sheet, Strip and Foil for General Engineering Purposes
- AS 1590 Copper Alloy Threaded Pipe Fittings for Use with Tubes Threaded with Pipe Threads of Whitworth Form
- AS 1645 Copper and Copper Alloy Compression Fittings for Use in Water Supply and Hot Water Services
- AS 1722 Pipe Threads of Whitworth Form
Part 1—Sealing Pipe Threads
Part 2—Fastening Pipe Threads
- AS 1939 Classification of Degrees of Protection Provided by Enclosures of Electrical Equipment
- AS 2345 An Accelerated Laboratory Test Method for Assessment of the Susceptibility of Brass to Dezincification
- AS 2752 Preferred Numbers and Their Use*
- AS 3142 Approval and Test Specification for Electric Water Heaters
- AS 3161 Approval and Test Specification for Thermostats and Energy Regulators

1.3.2 Industrial codes. The following Codes are referred to in this standard:

- AG 102 Approval Requirements for Class A Gas Water Heaters Equipped with Natural Draft Combustion Systems (published by the Australian Gas Association and the Australian Liquefied Petroleum Gas Association)
- AG 109 Approval Requirements for Class A Gas Water Heaters Equipped with Forced or Induced Draught Combustion Systems (published by the Australian Gas Association and the Australian Liquefied Petroleum Gas Association)

1.4 DEFINITIONS. For the purpose of this standard, the following definitions apply (see also Fig. 1.1).

*Revision of SAA MP19-1970.