

DR 95144

DR 95147

1996ed Fwd 19960221


AS 1194, Part 2—1983

UDC 621.315.337.4:669.3-426:621.3.045.12

CK BY
AS/NZS 1194.2-1986 #
1194.5-1986

Australian Standard 1194, Part 2—1983

WINDING WIRES Part 2—ENAMELLED RECTANGULAR COPPER WINDING WIRES

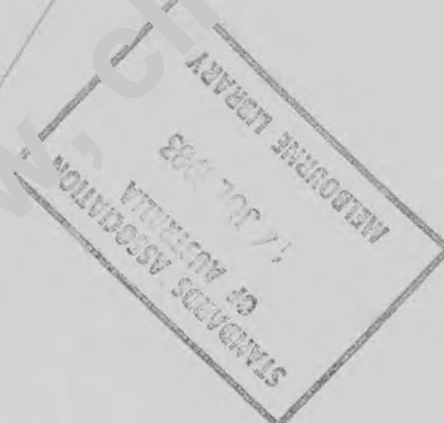

[Title allocated by Defence Cataloguing Authority: WIRE,
ELECTRICAL (Rectangular, Copper, Enamelled) NSC 6145]



STANDARDS ASSOCIATION OF AUSTRALIA
Incorporated by Royal Charter

This Australian standard was prepared by Committee EL/3, Electric Wires and Cables. It was approved on behalf of the Council of the Standards Association of Australia on 16 May 1983 and published on 8 August 1983.

The following interests are represented on Committee EL/3:

Australian-British Trade Association
Australian Electrical and Electronic Manufacturers Association
Confederation of Australian Industry
Defence Standardization Committee
Department of Construction
Department of Aviation (Commonwealth)
Electrical Approvals Authorities
Electrical Contractors Associations of Australia
Electrical Testing Laboratories
Electricity Supply Association of Australia
Metals Industry Organizations
Railways of Australia Committee
Representative of SAA Committee EL/3
Telecom Australia

To keep abreast of progress in industry, Australian standards are subject to continuous review and are kept up-to-date with the issue of amendments or new editions as necessary. It is important therefore that standards users ensure that their standards are up-to-date. Full details of all SAA publications will be found in the Annual List of Australian Standards; these details are supplemented by listings in the SAA monthly journal 'The Australian Standard'. Information on the Annual List and 'The Australian Standard' may be obtained from any sales office of the Association, where details are also available of the current status of individual standards. Suggestions for improvements to published standards, addressed to the head office of the Association, are welcomed.

This standard was issued in draft form for comment as DR 81226.

AUSTRALIAN STANDARD

WINDING WIRES

Part 2

**ENAMELLED RECTANGULAR
COPPER WINDING WIRES**

AS 1194, Part 2—1983

First published 1983

**PUBLISHED BY THE STANDARDS ASSOCIATION OF AUSTRALIA
STANDARDS HOUSE, 80 ARTHUR ST, NORTH SYDNEY, N.S.W.**

ISBN 0 7262 3028 6

PREFACE

This standard was prepared by the Association's Committee on Electric Wires and Cables as a part revision of AS C73. It supersedes those requirements of AS C73 that relate to enamelled rectangular copper winding wire.

Eventually all standards relating to winding wire will be embodied in a four-part standard designated AS 1194, the Parts being as follows:

- Part 1—Enamelled Round Copper Winding Wires (see Note)
- Part 2—Enamelled Rectangular Copper Winding Wires (this standard)
- Part 3—Enamelled Round Aluminium Winding Wires (in course of preparation)
- Part 4—Enamelled Rectangular Aluminium Winding Wires (under consideration)

NOTE: The current standard for enamelled round copper winding wires is AS 1194—1979. That standard is now being revised and when published it will form Part 1 of AS 1194.

The nominal dimensions of conductors specified in this standard are identical with those specified in IEC 182, Basic Dimensions of Winding Wires. The dimensions specified are preferred sizes and should be used wherever possible. Where, for technical reasons, intermediate wire dimensions (which are non-preferred) are required, Appendix A provides guidance on the selection of those dimensions.

Tolerances on the dimensions of conductors are also identical with IEC values. Two grades of enamel are provided for. The maximum increase in dimensions of Grades 1 and 2 wire are identical with those specified in BS 4516, Part 2.

In the preparation of this standard, consideration was given to the following documents:

- | | |
|---------|---|
| IEC 172 | Test Procedure for the Evaluation of the Thermal Endurance of Enamelled Wire by the Lowering of the Electrical Strength between Twisted Wires |
| IEC 182 | Basic Dimensions of Winding Wires |
| IEC 251 | Methods of Test for Winding Wires |
| BS 4516 | Enamelled Copper Conductors on Polyacetal Base with High Mechanical Properties)
Part 2—Rectangular Conductors |

Acknowledgement is made of the assistance received therefrom.

© Copyright — STANDARDS ASSOCIATION OF AUSTRALIA 1983

Users of standards are reminded that copyright subsists in all SAA publications. No part of this publication may be reproduced, stored in a retrieval system in any form or transmitted by any means without prior permission in writing of the Standards Association of Australia.

CONTENTS

	<i>Page</i>
SECTION 1. SCOPE AND DEFINITIONS	
1.1 Scope....	4
1.2 Referenced Documents	4
1.3 Definitions:...	4
SECTION 2. REQUIREMENTS	
2.1 General	5
2.2 Conductors	5
2.3 Enamel Covering	5
SECTION 3. TESTS	
3.1 General Test Conditions	10
3.2 Dimensions	10
3.3 Elongation....	10
3.4 Breakdown Voltage	10
3.5 Flexibility—Mandrel Winding Test	11
3.6 Adherence—Stretching Test	14
3.7 Heat Shock	14
3.8 Resistance to Solvents—Pencil Hardness Test	14
3.9 Thermal Endurance	14
3.10 Completeness of Cure....	14
SECTION 4. PACKAGING AND LABELLING	
4.1 Packaging	16
4.2 Labelling	16
APPENDICES	
A Nominal Conductor Dimensions of Rectangular Copper Winding Wires R 20/R 40 Series	17
B Enamel Removal	25
C Pencil Hardness	26
D International Standards of Resistance for Copper	28
E Rounding of Corners—Preparation of Test Specimens	28

STANDARDS ASSOCIATION OF AUSTRALIA

Australian Standard

for

ENAMELLED RECTANGULAR COPPER WINDING WIRES

SECTION 1. SCOPE AND DEFINITIONS

1.1 SCOPE. This standard specifies requirements for enamelled rectangular copper winding wires to be used for windings of electrical equipment.

Dimensions and material requirements for the conductor and enamelled covering are specified and tests are given to establish compliance with the standard.

Three types of enamel covering are specified. These are polyvinyl acetal (PVA), polyesterimide (PEI) and modified polyester overcoated with polyamide-imide (PE-AI).

1.2 REFERENCED DOCUMENTS. The following documents are referred to in this standard:

AS 1279	Copper Refinery Shapes
AS 1767	Insulating Oil for Transformers and Switchgear
AS 1852	International Electrotechnical Vocabulary
SAA MP19	Report on Preferred Numbers and Their Use
IEC 28	International Standards of Resistance for Copper
IEC 172	Test Procedures for the Evaluation of the Thermal Endurance of Enamelled Wire by the Lowering of the Electric Strength Between Twisted Wires
IEC 182	Basic Dimensions of Winding Wires
IEC 304	Standard Colours for PVC Insulation for Low-frequency Cables and Wires

1.3 DEFINITIONS. For the purpose of this standard, the definitions in AS 1852 and the following apply:

1.3.1 Conductor—the bare metal remaining after removal of all covering.

1.3.2 Wire or strip—the rectangular conductor complete with all covering.

1.3.3 Overall thickness—the thickness dimension measured across the wire or strip including the final layer of covering (see Fig. 3.1).

1.3.4 Overall width—the width dimension measured across the wire or strip including the final layer of covering (see Fig. 3.1).

1.3.5 Increase in dimensions due to enamel.

(a) The difference between the overall thickness and the conductor thickness, reported as 'increase in thickness' due to enamel.

(b) The difference between the overall width and the conductor width, reported as the 'increase in width' due to enamel.

1.3.6 Grade of enamel—an expression used to designate the thickness of enamel covering. It is used in the form Grade 1 and Grade 2, the higher grade number designating thicker enamel.

1.3.7 Thermal endurance temperature (previously known as temperature index)—the temperature in degrees Celsius corresponding to an extrapolated life of 20 000 h on an Arrhenius plot.

NOTES:

1. The plot uses the 'straight line of best fit' to the measured lives of groups of specimens aged at not less than three evaluated temperatures complying with the requirements of IEC 172.

2. In coil design the choice of the thermal endurance temperature is generally governed by temperatures reached at 'hot spots'.

1.3.8 Crack—an opening in the enamel covering which exposes the conductor to view at a magnification of 6X to 10X.

1.3.9 Loss of adhesion—the absence of bond between the enamel and the conductor as exhibited by relative movement between the two.

1.3.10 Routine tests—tests made by the manufacturer on all batches of wire.

1.3.11 Special tests—tests made by the manufacturer on samples of completed wire to verify that the finished product meets the requirements of this standard.

1.3.12 Specimen—a length of wire selected for testing.