

AS 3501—1987
Reconfirmed 2017

Australian Standard[®]

**PARALLEL SCREW THREADS OF
WHITWORTH FORM (BSW AND
BSF) AND ASSOCIATED
GAUGES AND GAUGING
PRACTICE**

This Australian Standard was prepared by Committee ME/28, Screw Threads. It was approved on behalf of the Council of the Standards Association of Australia on 20 August 1987 and published on 5 October 1987.

The following interests are represented on Committee ME/28:

Confederation of Australian Industry
CSIRO, Division of Applied Physics
Department of Defence
Department of Technical and Further Education, N.S.W.
Electricity Supply Association of Australia
Fasteners Institute of Australia
Federal Chamber of Automotive Industries
Institution of Engineers Australia
Institution of Production Engineers
Metal Trades Industry Association of Australia
Railways of Australia Committee
Society of Automotive Engineers, Australasia

Review of Australian Standards. To keep abreast of progress in industry, Australian Standards are subject to periodic review and are kept up to date by the issue of amendments or new editions as necessary. It is important therefore that Standards users ensure that they are in possession of the latest edition, and any amendments thereto.

Full details of all Australian Standards and related publications will be found in the Standards Australia Catalogue of Publications; this information is supplemented each month by the magazine 'The Australian Standard', which subscribing members receive, and which gives details of new publications, new editions and amendments and of withdrawn Standards.

Suggestions for improvements to Australian Standards, addressed to the head office of Standards Australia, are welcomed. Notification of any inaccuracy or ambiguity found in an Australian Standard should be made without delay in order that the matter may be investigated and appropriate action taken.

This Standard was issued in draft form for comment as DR 85010.

STANDARDS AUSTRALIA

RECONFIRMATION

OF

AS 3501—1987

**Parallel screw threads of Whitworth form (BSW and BSF) and associated gauges
and gauging practice**

RECONFIRMATION NOTICE

Technical Committee ME-029 has reviewed the content of this publication and in accordance with Standards Australia procedures for reconfirmation, it has been determined that the publication is still valid and does not require change.

Certain documents referenced in the publication may have been amended since the original date of publication. Users are advised to ensure that they are using the latest versions of such documents as appropriate, unless advised otherwise in this Reconfirmation Notice.

Approved for reconfirmation in accordance with Standards Australia procedures for reconfirmation on 16 June 2017.

The following are represented on Technical Committee ME-029:

Association of Accredited Certification Bodies
Association of Wall and Ceiling Industries of Australia
Australian Chamber of Commerce and Industry
Australian Engineered Fastener and Anchors Council
Australian Industry Group
Australian Steel Institute
AUSTROADS
Bureau of Steel Manufacturers of Australia
Galvanizers Association of Australia
Materials Australia
National Association of Steel-Framed Housing
National Association of Testing Authorities Australia
New Zealand Heavy Engineering Research Association
Society of Automotive Engineers- Australasia
Steel Construction New Zealand
Swinburne University of Technology

NOTES

Currently in preview, click buy full vers.

Australian Standard[®]

**PARALLEL SCREW THREADS OF
WHITWORTH FORM (BSW AND
BSF) AND ASSOCIATED
GAUGES AND GAUGING
PRACTICE**

First published as AS B46—1929 (endorsement of BS 84:1918).
AS B47 first published 1929 (endorsement of BS 92:1919).
AS B46—1929 and AS B47—1929 revised, amalgamated and issued as AS B47—1940 (endorsement of BS 84:1940).
AS B121, Part 2 first published 1953 (endorsement of BS 919: Part 2: 1952).
AS B47 third edition 1958 (endorsement of BS 84:1956).
AS B121, Part 2—1953 withdrawn August 1978.
AS B47—1958 revised, and amalgamated with part of AS B121, Part 2—1953 and redesignated as AS 3501—1987.

PUBLISHED BY STANDARDS AUSTRALIA
(STANDARDS ASSOCIATION OF AUSTRALIA)
1 THE CRESCENT, HOMEBUSH, NSW 2140

ISBN 0 7262 4742 1

PREFACE

This Standard was prepared by the Association's Committee on Screw Threads, to supersede AS B47—1958, Parallel Screw Threads of Whitworth Form. The Standard also covers associated gauges and gauging practices previously given in AS B121, Screw Gauge Limits and Tolerances, Part 2—1953, Gauges for Screw Threads Other Than Those of Unified Form, which was withdrawn in 1978.

It has become apparent over recent years that screw threads of Whitworth form (BSW and BSF), which theoretically are obsolescent, in fact have a continuing use in industry for replacement purposes, and are still being featured in new equipment particularly in the general engineering and heavy engineering industries.

In recognition of this, the committee agreed that a replacement for AS B47 was warranted. At the same time the opportunity has been taken to improve the presentation of the technical information, to introduce contemporary terms and definitions in line with the metric screw thread standards, and to include the gauges and gauging practices for BSW and BSF threads previously given in AS B121, Part 2.

The technical requirements for the screw threads and those for associated gauges and gauging practices are unchanged from those specified in AS B47 and AS B121, Part 2.

There are no related ISO Standards for parallel screw threads of Whitworth form (other than for pipe threads) or related gauges and gauging practices, but this Standard is technically identical with BS 84, Parallel Screw Threads of Whitworth Form, and BS 919, Screw Gauge Limits and Tolerances, Part 2—Gauges for Screw Threads Other Than Those of Unified Form.

© Copyright — STANDARDS AUSTRALIA

Users of Standards are reminded that copyright subsists in all Standards Australia publications and software. Except where the Copyright Act allows and except where provided for below no publications or software produced by Standards Australia may be reproduced, stored in a retrieval system in any form or transmitted by any means without prior permission in writing from Standards Australia. Permission may be conditional on an appropriate royalty payment. Requests for permission and information on commercial software royalties should be directed to the head office of Standards Australia.

Standards Australia will permit up to 10 percent of the technical content pages of a Standard to be copied for use exclusively in-house by purchasers of the Standard without payment of a royalty or advice to Standards Australia.

Standards Australia will also permit the inclusion of its copyright material in computer software programs for no royalty payment provided such programs are used exclusively in-house by the creators of the programs.

Care should be taken to ensure that material used is from the current edition of the Standard and that it is updated whenever the Standard is amended or revised. The number and date of the Standard should therefore be clearly identified.

The use of material in print form or in computer software programs to be used commercially, with or without payment, or in commercial contracts is subject to the payment of a royalty. This policy may be varied by Standards Australia at any time.

CONTENTS

	<i>Page</i>
SECTION 1. SCOPE AND GENERAL	
1.1 SCOPE	4
1.2 APPLICATION	4
1.3 THE BRITISH STANDARD WHITWORTH SCREW THREAD SYSTEM	4
1.4 REFERENCED DOCUMENTS	4
1.5 DESIGNATION	4
SECTION 2. SCREW THREAD PROFILES	
2.1 SCOPE OF SECTION	5
2.2 BASIC (AND DESIGN) PROFILE AND THREAD DATA	5
2.3 LIMITING PROFILES	5
SECTION 3. GENERAL PLAN	
3.1 SCOPE OF SECTION	8
3.2 THREAD SERIES	8
3.3 BASIC DIMENSIONS	8
SECTION 4. THREAD CLASSES, DEVIATIONS, AND TOLERANCES	
4.1 SCOPE OF SECTION	12
4.2 THREAD CLASSES	12
4.3 FUNDAMENTAL DEVIATIONS	13
4.4 TOLERANCES	13
4.5 COATED THREADS	14
4.6 STAINLESS STEEL EXTERNAL THREADS	14
SECTION 5. LIMITS OF SIZE	
5.1 SCOPE OF SECTION	17
5.2 LIMITS OF SIZE	17
SECTION 6. GAUGING OF SCREW THREADS OF WHITWORTH FORM	
6.1 SCOPE OF SECTION	22
6.2 TYPES OF GAUGES	22
6.3 MATERIALS AND HARDNESS	22
6.4 REFERENCE TEMPERATURE	22
6.5 MARKING	22
6.6 INSPECTION OF SCREW THREADS	22
6.7 DESIGN FEATURES OF SCREW GAUGES	23
APPENDICES	
A TRUNCATED THREADS OF WHITWORTH FORM WITH FLAT CRESTS	31
B BASES FOR THE DERIVATION OF FUNDAMENTAL DEVI- ATIONS AND TOLERANCES	36
C LIMITS FOR CLOSE CLASS INTERNAL THREADS	38
D PITCH DIAMETER EQUIVALENT OF PITCH AND FLANK ANGLE ERRORS	40
E NOTES ON SCREW THREAD VERIFICATION	42

STANDARDS ASSOCIATION OF AUSTRALIA

Australian Standard

PARALLEL SCREW THREADS OF WHITWORTH FORM (BSW AND BSF) AND ASSOCIATED GAUGES AND GAUGING PRACTICE

SECTION 1. SCOPE AND GENERAL

1.1 SCOPE. This Standard specifies requirements (in inch units) for parallel screw threads, having the Whitworth thread form, together with associated gauges and gauging practices, in the diameter size range $\frac{1}{8}$ inch to 6 inches inclusive.

The Standard gives information on designation, thread classes, deviations, tolerances, and gauging.

Appendices give the basis of the tabulated values, pitch diameter equivalents of pitch and flank angle errors, details of some less frequently used threads, and notes on screw thread verification.

1.2 APPLICATION. The Standard gives information on the design, manufacture, use, and metrology of the British Standard Whitworth screw thread system.

The Standard is intended for adoption by industry and government authorities concerned with the manufacture, measurement, and use of British Standard Whitworth screw threads.

NOTE: These screw threads are obsolescent and should not be used in new designs.

1.3 THE BRITISH STANDARD WHITWORTH SCREW THREAD SYSTEM. The British Standard Whitworth screw thread system comprises the following series:

- The British Standard Whitworth coarse thread series (BSW), which gives graded diameter/pitch combinations in diameters from $\frac{1}{8}$ in to 6 in inclusive.
- The British Standard Fine thread series (BSF), which gives graded diameter/pitch combinations in diameters from $\frac{3}{16}$ in to $\frac{1}{4}$ in inclusive.

NOTE: The tabulated values of limits for BSF threads are given for diameters up to and including 3 in only, because these threads are rarely used in larger diameters.

- A supplementary selected constant pitch thread series (Whit. S) in vulgar fractional and decimal fractional sizes, in diameters from $\frac{1}{4}$ in to 20 in inclusive.

NOTE: For Whitworth threads with truncated form, see Appendix A.

1.4 REFERENCED DOCUMENTS. The following Standards are referred to in this Standard:

- | | |
|---------|---|
| AS 1014 | Gauging of Metric Screw Threads. |
| AS B129 | Designs for Geometric Limit Gauges (Plain and Screwed in Inch Units). |

1.5 DESIGNATION.

1.5.1 General. Screw threads designed or manufactured to this Standard shall be designated in accordance with the system illustrated by the following examples:

Designation for an external thread 1-8 BSW (free) external


Designation for an external thread 1-10 BSF (medium) external

Designation for an external thread 1/2-9 BSW (close) external

Designation for an internal thread 1-8 BSW (medium) internal

Designation for an internal thread 1-10 BSF (normal) internal

Designation for an internal thread 1.5-12 Whit. S (normal) internal

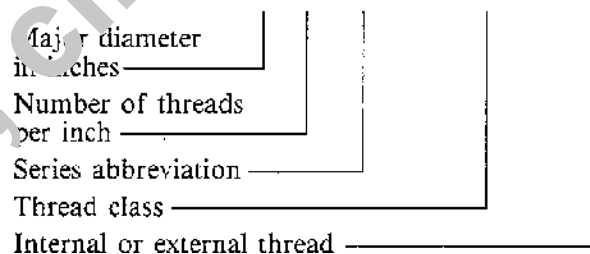

If the screw thread is left hand, the symbol 'LH' shall be added to the designation, e.g. 1-8 BSW (free) external LH.

1.5.2 Threads with special requirements.

1.5.2.1 Coated threads. For coated threads, the word 'COATED' should be added to the designation required by Clause 1.5.1.

1.5.2.2 Threads of truncated form. For truncated threads, the abbreviation 'trunc' shall be added to the designation required by Clause 1.5.1, e.g. 1-8 BSW (free) external, trunc.

1.5.2.3 Multistart threads. Multistart threads shall be designated in accordance with the following example:

2 in-2 start, 0.2 in lead, 0.1 in pitch, Whit.