

DAP

Witharawan

AS 3610 Supp2—1990


December 1, 1995.

AS 3610 Supplement 2—1990

Formwork for concrete

(Supplement to AS 3610—1990)

H



STANDARDS AUSTRALIA



This Australian Standard was prepared by Committee BD/43, Formwork. It was approved on behalf of the Council of Standards Australia on 20 October 1989 and published on 9 April 1990.

The following interests are represented on Committee BD/43:

Aluminium Development Council
Association of Consulting Engineers, Australia.
Australian Federation of Construction Contractors
Australian Precast Concrete Manufacturers Association
Austroads
Cement and Concrete Association of Australia
CSIRO, Division of Building, Construction and Engineering
Department of Employment, Vocational Education, Training and Industrial
Relations, Qld.
Department of Occupational Health Safety and Welfare, W.A.
Formwork Contractors of Western Australia
Master Builders Construction and Housing Association Australia
Metal Trades Industry Association of Australia
Plywood Association of Australia Ltd
Precast Concrete Manufacturers Association of New South Wales
Public Works Department New South Wales
Queensland University of Technology
Workcover Authority New South Wales

Review of Australian Standards. To keep abreast of progress in industry, Australian Standards are subject to periodic review and are kept up-to-date by the issue of amendments or new editions as necessary. It is important, therefore that Standards users ensure that they are in possession of the latest edition, and any amendments thereto.

Full details of all Australian Standards and related publications will be found in the Standards Australia Catalogue of Publications; this information is supplemented each month by the magazine 'The Australian Standard', which subscribing members receive, and which gives details of new publications, new editions and amendments, and of withdrawn Standards.

Suggestions for improvements to Australian Standards, addressed to the head office of Standards Australia, are welcomed. Notification of any inaccuracy or ambiguity found in an Australian Standard should be made without delay in order that the matter may be investigated and appropriate action taken.

This Standard was issued in draft form for comment as DR 86123.

AS 3610 Supp2—1990

Australian Standard®

Formwork for concrete

(Supplement to AS 3610—1990)

First published as AS 3610 Supplement 2—1990.

PUBLISHED BY STANDARDS AUSTRALIA
(STANDARDS ASSOCIATION OF AUSTRALIA)
STANDARDS HOUSE, 80 ARTHUR ST, NORTH SYDNEY NSW

ISBN 0 7262 5997 7

PREFACE

This Supplement was prepared by the Standards Australia Committee on Formwork as a commentary on AS 3610—1989, *Formwork for Concrete*.

The Supplement includes background information on the Standard, guidance on its use and suggestions on good practice.

The paragraphs in this commentary refer directly to the respective clauses in the Standard, e.g. Paragraph C5.3.1 refers to Clause 5.3.1, and Appendix CA refers to Appendix A.

Details on references and documents referred to in this Supplement are provided in an Addendum at the end of the document.

© Copyright — STANDARDS AUSTRALIA

Users of Standards are reminded that copyright subsists in all Standards Australia publications and software. Except where the Copyright Act allows and except where provided for below no publications or software produced by Standards Australia may be reproduced, stored in a retrieval system in any form or transmitted by any means without prior permission in writing from Standards Australia. Permission may be conditional on an appropriate royalty payment. Requests for permission and information on commercial software royalties should be directed to the Head Office of Standards Australia.

Standards Australia will permit up to 10 percent of the technical content pages of a Standard to be copied for use exclusively in-house by purchasers of the Standard without payment of a royalty or advice to Standards Australia.

Standards Australia will also permit the inclusion of its copyright material in computer software programs for no royalty payment provided such programs are used exclusively in-house by the creators of the programs.

Care should be taken to ensure that material used is from the current edition of the Standard and that it is updated whenever the Standard is amended or revised. The number and date of the Standard should therefore be clearly identified.

The use of material in print form or in computer software programs to be used commercially, with or without payment, or in commercial contracts is subject to the payment of a royalty. This policy may be varied by Standards Australia at any time.

CONTENTS

	<i>Page</i>
FOREWORD	4
SECTION C2. THE PROJECT DOCUMENTATION	
C2.3 INFORMATION TO BE PROVIDED IN THE PROJECT DOCUMENTATION	5
SECTION C3. SURFACE FINISH	
C3.2 APPLICATION	9
C3.3 CLASSES OF SURFACE FINISH	9
C3.4 PHYSICAL QUALITY	11
C3.5 COLOUR CONTROL OF UNTREATED SURFACES	13
C3.6 TEST PANELS	15
SECTION C4. STRUCTURAL DESIGN AND DOCUMENTATION	
C4.1 SCOPE OF SECTION	7
C4.2 APPLICATION OF SECTION	11
C4.3 DESIGN REQUIREMENTS	17
C4.4 LOADS	23
C4.5 ANALYSIS AND DESIGN	36
C4.6 CONSTRUCTION CONSIDERATIONS	41
C4.7 FORMWORK DOCUMENTATION	42
SECTION C5. CONSTRUCTION	
C5.1 SCOPE OF SECTION	44
C5.3 GENERAL FORMWORK REQUIREMENTS— <i>IN SITU</i> CON- CRETE	44
C5.4 FORMWORK CONSTRUCTION— <i>IN SITU</i> CONCRETE	50
C5.5 FORMWORK CONSTRUCTION—PRECAST CONCRETE	61
C5.6 EVALUATION OF COMPLETED WORK AND REPAIRS	62
APPENDIX CA. COMMENTARY ON APPENDIX A—TESTING OF FORMWORK	66
ADDENDUM REFERENCED DOCUMENTS AND REFERENCES	70

FOREWORD

In this commentary the terms 'Project Designer' and 'Formwork Designer' are used. Neither term should be considered to refer to a single individual, as each may comprise several organizations or individuals of varying qualifications.

For example—

- (a) within the term 'Formwork Designer'—
 - (i) proprietary items used in the formwork assembly could be designed by the manufacturer;
 - (ii) forms, bearers and joists by personnel engaged by the formwork contractor; and
 - (iii) footings (if necessary) by personnel engaged by the building contractor; and
- (b) within the term 'Project Designer', a structural engineer could be responsible for the concrete structure, and an architect for the surface finish.

STANDARDS AUSTRALIA

Australian Standard

Formwork for concrete—Commentary
(Supplement No 2 to AS 3610—1990)

SECTION C2. THE PROJECT DOCUMENTATION

C2.3 INFORMATION TO BE PROVIDED IN THE PROJECT DOCUMENTATION. It is necessary for the project designer, through the project documentation, to communicate specific requirements. The list given in Clause 2.3 is only a general list. For particular projects many other aspects may require attention, with appropriate limitations on the formworker's actions being specified. This Clause covers only those matters affecting the structural aspects of the concrete. The quality of the surface finish is discussed in the commentary to Section 3: Surface Finish.

- (a) *Minimum formwork stripping times.* This is primarily directed towards *in situ* concrete, although much of it can apply to precast concrete. The stripping times provided in the formwork documentation should be in accordance with AS 3600 (see also Clause 5.4.3.2).

Three criteria apply generally to the removal of all forms and their supports:

- (i) *Structural.* As a structure the member needs to remain secure from collapse, and from

damage that may affect its performance in late service, e.g. cracking or deformation in excess of that anticipated by the project designer.

- (ii) *Surface finish.* Premature stripping may adversely affect the surface condition through scaling, spalling of edges or corners, or cause non-uniformity of colour.
- (iii) *Durability.* An important factor in the achievement of optimum durability is adequate hydration. A economic considerations often call for early stripping, attention to curing is vital.

A controlling factor in these three matters is the strength development of the concrete at early ages, which is in turn related to the rate of hydration of the cement.

Although strength development is influenced by the ambient humidity, most recognized models for strength gain are related only to time and temperature. Figure C2.1 (see Ref. 1), shows the variations of strength growth with temperature.

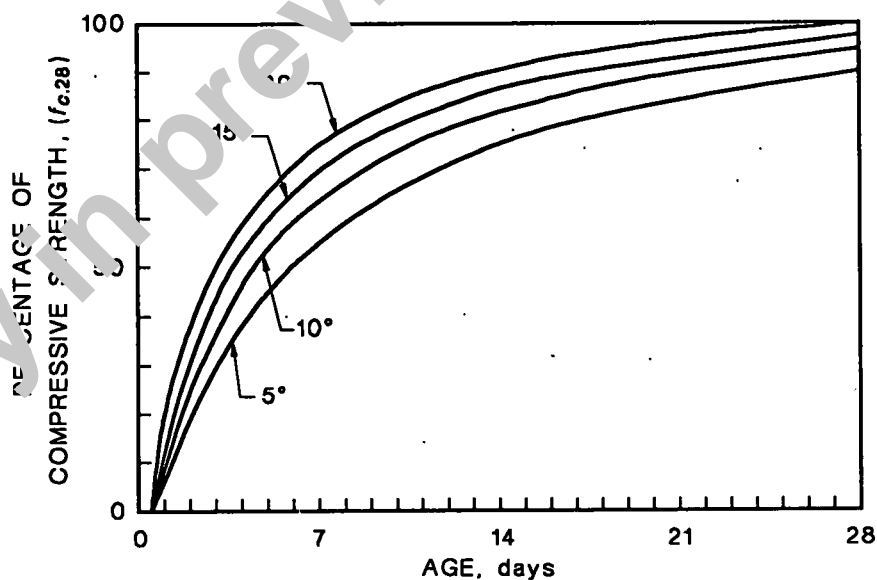


FIGURE C2.1 TYPICAL COMPRESSIVE STRENGTH DEVELOPMENT OF PORTLAND CEMENT CONCRETE UNDER DIFFERENT AVERAGE AMBIENT TEMPERATURES