


Dimensioning and Tolerancing

Engineering Product Definition and
Related Documentation Practices



AN INTERNATIONAL STANDARD

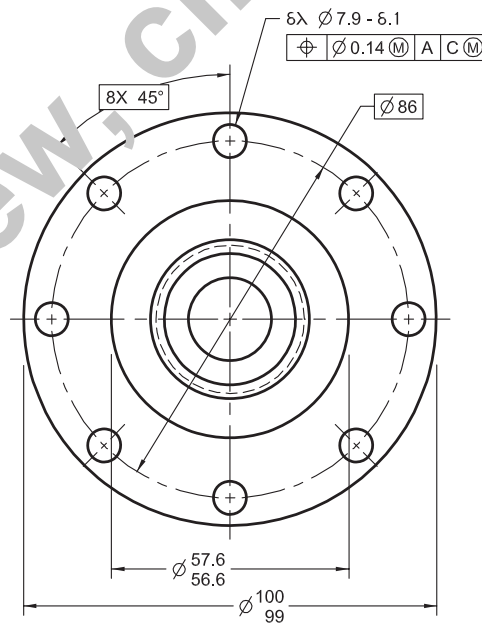

The American Society of
Mechanical Engineers

ADOPTION NOTICE

ASME Y14.5, Dimensioning and Tolerancing, was adopted on 9 February 2009 for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, U.S. Army Research, Development and Engineering Center (ARDEC), ATTN: AMSRD-AAR-QES-E, Picatinny Arsenal, NJ 07806-5000. Copies of this document may be purchased from The American Society of Mechanical Engineers (ASME), 150 Clove Road, 6th Floor, Little Falls, NJ 07424-2139; <http://www.asme.org>.

Custodians:

Army — AR
 Navy — SA
 Air Force — 16

Adopting Activity:

Army — AR
 (Project DRPR-2009-003)

Review Activities:

Army — CR, MI, PT, TM
 Navy — AS, CG, CH, EC, MC, NP, TD
 Air Force — 13, 99
 DLA — DH
 OSD — SE
 NSA — NS
 Other — CM, MP, DC2

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://quicksearch.dla.mil>.

ASMC N/A

AREA DRPR

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

ASME Y14.5-2018
(Revision of ASME Y14.5-2009)

Dimensioning and Tolerancing

**Engineering Product Definition and
Related Documentation Practices**

AN INTERNATIONAL STANDARD



**The American Society of
Mechanical Engineers**

Two Park Avenue • New York, NY • 10016 USA

Date of Issuance: February 11, 2019

This Standard will be revised when the Society approves the issuance of a new edition.

Periodically certain actions of the ASME Y14 Committee may be published as Cases. Cases are published on the ASME website under the Y14 Committee Page at <http://go.asme.org/Y14committee> as they are issued.

Errata to codes and standards may be posted on the ASME website under the Committee Pages to provide corrections to incorrectly published items, or to correct typographical or grammatical errors in codes and standards. Such errata shall be used on the date posted.

The Y14 Committee Page can be found at <http://go.asme.org/Y14committee>. There is an option available to automatically receive an e-mail notification when errata are posted to a particular code or standard. This option can be found on the appropriate Committee Page after selecting "Errata" in the "Publication Information" section.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This international code or standard was developed under procedures accredited as meeting the criteria for American National Standards and it is an American National Standard. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" an item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Two Park Avenue, New York, NY 10016-5990

Copyright © 2019 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All rights reserved
Printed in U.S.A.

CONTENTS

Foreword	xi	
Committee Roster	xv	
Correspondence With the Y14 Committee	xvi	
Section 1	Scope	1
1.1	Introduction	1
1.2	General	1
1.3	Reference to This Standard	1
1.4	ASME Y14 Series Conventions	1
1.5	Drawings Without Reference to a Standard	2
1.6	Reference to Gaging	2
1.7	Symbols	3
Section 2	References	4
2.1	Introduction	4
2.2	Cited Standards	4
2.3	Additional Sources (Not Cited)	4
Section 3	Definitions	5
Section 4	Fundamental Rules, Tolerancing Defaults, and Dimensioning Practices	12
4.1	Fundamental Rules	12
4.2	Units of Measure	13
4.3	Types of Dimensioning	13
4.4	Application of Dimensions	14
4.5	Dimensioning Features	15
4.6	Location of Features	18
Section 5	Tolerancing, Interpretation of Limits, Limits of Size, and Material Condition Modifiers	33
5.1	General	33
5.2	Direct Tolerancing Methods	33
5.3	Tolerance Expression	34
5.4	Interpretation of Limits	34
5.5	Single Limit Toleranced Dimensions	35
5.6	Tolerance Accumulation Between Surfaces	35
5.7	Dimensions Related to an Origin	35
5.8	Limits of Size	35
5.9	Applicability of Modifiers on Geometric Tolerance Values and Datum Feature References	36
5.10	Screw Threads	38
5.11	Gears and Splines	38
5.12	Boundary Conditions	38
5.13	Angular Surfaces	38
5.14	Conical Tapers	38

5.15	Flat Tapers	39
5.16	Radius	39
5.17	Tangent Plane	39
5.18	Statistical Tolerancing	39
Section 6	Symbology	54
6.1	General	54
6.2	Use of Notes to Supplement Symbols	54
6.3	Symbol Construction	54
6.4	Feature Control Frame Symbols	57
6.5	Feature Control Frame Placement	58
6.6	Tolerance Zone Shape	58
6.7	Tabulated Tolerances	58
Section 7	Datum Reference Frames	70
7.1	General	70
7.2	Degrees of Freedom	70
7.3	Degrees of Freedom Constrained by Primary Datum Features RMB	70
7.4	Constraining Degrees of Freedom of a Part	70
7.5	True Geometric Counterpart	71
7.6	True Geometric Counterparts and Physical Datum Features Simulators	71
7.7	Datum Reference Frame	71
7.8	Datum Features	72
7.9	Datum Feature Controls	72
7.10	Specifying Datum Features in an Order of Precedence	72
7.11	Establishing Datums	73
7.12	Common Datum Features	77
7.13	Mathematically Defined Surface	78
7.14	Multiple Datum Reference Frames	78
7.15	Functional Datum Features	78
7.16	Rotational Constraint About a Datum Axis or Point	78
7.17	Application of MMB, LMB, and RMB to Irregular Features of Size	80
7.18	Datum Feature Selection Practical Application	80
7.19	Simultaneous Requirements	80
7.20	Restrained Condition	81
7.21	Datum Reference Frame Identification	82
7.22	Customized Datum Reference Frame Construction	82
7.23	Application of a Customized Datum Reference Frame	82
7.24	Datum Targets	83
Section 8	Tolerances of Form	148
8.1	General	148
8.2	Form Control	148
8.3	Specifying Form Tolerances	148
8.4	Form Tolerances	148
8.5	Average Diameter	150
Section 9	Tolerances of Orientation	163
9.1	General	163

9.2	Orientation Control	163
9.3	Specifying Orientation Tolerances	163
9.4	Tangent Plane	164
9.5	Alternative Practice	164
Section 10	Tolerances of Position	179
10.1	General	179
10.2	Positional Tolerancing	179
10.3	Positional Tolerancing Fundamentals — I	179
10.4	Positional Tolerancing Fundamentals — II	182
10.5	Pattern Location	184
10.6	Coaxial Feature Controls	187
10.7	Tolerancing for Symmetrical Relationships	188
Section 11	Tolerances of Profile	240
11.1	General	240
11.2	Profile	240
11.3	Tolerance Zone Boundaries	240
11.4	Profile Applications	241
11.5	Material Condition and Boundary Condition Modifiers as Related to Profile Controls	242
11.6	Composite Profile	242
11.7	Multiple Single-Segment Profile Tolerancing	244
11.8	Combined Controls	244
11.9	Profile of a Line as a Refinement	244
11.10	Dynamic Profile Tolerance Modifier	244
Section 12	Tolerances of Runout	287
12.1	General	287
12.2	Runout	287
12.3	Runout Tolerance	287
12.4	Types of Runout Tolerances	287
12.5	Runout Tolerance and Size	288
12.6	Application	288
12.7	Specification	289
 Mandatory Appendix		
I	Alternative Practices	306
 Nonmandatory Appendices		
A	Principal Changes and Improvements	310
B	Formulas for Positional Tolerancing	315
C	Form, Proportion, and Comparison of Symbols	318
D	Former Practices	326
 Figures		
3-1	Related and Unrelated AME	10
3-2	Related and Unrelated Actual Minimum Material Envelope From Figure 3-1	11
4-1	Angular Units	19

4-2	Millimeter Dimensions	19
4-3	Decimal Inch Dimensions	19
4-4	Application of Dimensions	19
4-5	Grouping of Dimensions	19
4-6	Spacing of Dimension Lines	20
4-7	Staggered Dimensions	20
4-8	Oblique Extension Lines	20
4-9	Breaks in Extension Lines	20
4-10	Point Locations	20
4-11	Limited Length or Area Indication	21
4-12	Leaders	21
4-13	Leader-Directed Dimensions	21
4-14	Minimizing Leaders	22
4-15	Leader Directions	22
4-16	Reading Directions	22
4-17	Intermediate Reference Dimension	22
4-18	Overall Reference Dimension	22
4-19	Diameters	23
4-20	Radii	23
4-21	Radius With Located Center	23
4-22	Radii With Unlocated Centers	23
4-23	Foreshortened Radii	24
4-24	True Radius	24
4-25	Spherical Radius	24
4-26	Dimensioning Arcs and Chords	24
4-27	Slotted Holes	25
4-28	Partially Rounded Ends	25
4-29	Rounded Corners	25
4-30	Circular Arc Outline	25
4-31	Coordinate or Offset Outline	25
4-32	Tabulated Outline	25
4-33	Symmetrical Outline	26
4-34	Round Hole	26
4-35	Counterbored Holes	26
4-36	Hole With Multiple Counterbores	27
4-37	Countersunk and Counterdrilled Holes	27
4-38	Countersink on a Curved Surface	28
4-39	Spotfaced Holes	28
4-40	Chamfers	28
4-41	45° Chamfer	28
4-42	Internal Chamfers	29
4-43	Chamfers Between Surfaces at Other Than 90°	29
4-44	Keyseats	29
4-45	Knurls	29
4-46	Knurls for Press Fits	29

4-47	Rectangular Coordinate Dimensioning	30
4-48	Rectangular Coordinate Dimensioning Without Dimension Lines	30
4-49	Rectangular Coordinate Dimensioning in Tabular Form	31
4-50	Polar Coordinate Dimensioning	31
4-51	Repetitive Features	31
4-52	Repetitive Features and Dimensions	32
5-1	Limit Dimensioning	40
5-2	Plus and Minus Tolerancing	40
5-3	Indicating Symbols for Metric Limits and Fits	40
5-4	Tolerance Accumulation: One Datum Reference Frame	41
5-5	Tolerance Accumulation: Multiple Datum Reference Frames	42
5-6	Relating Dimensional Limits to an Origin	42
5-7	Extreme Variations of Form Allowed by a Size Tolerance	43
5-8	Extreme Variations of Form Allowed by a Geometric Tolerance — Perfect Form at LMC	43
5-9	Size Meaning	44
5-10	Independency and Flatness Application	44
5-11	Continuous Feature, External Cylindrical	45
5-12	Continuous Feature, Internal Cylindrical	45
5-13	Continuous Feature, External Width	46
5-14	Virtual and Resultant Condition Boundaries Using the MMC Concept — Internal Feature	46
5-15	Virtual and Resultant Condition Boundaries Using the MMC Concept — Internal Feature	47
5-16	Inner and Outer Boundaries Using the RFS Concept — Internal Feature	48
5-17	Virtual and Resultant Condition Boundaries Using the MMC Concept — External Feature	49
5-18	Virtual and Resultant Condition Boundaries Using the LMC Concept — External Feature	50
5-19	Inner and Outer Condition Boundaries Using the RFS Concept — External Feature	51
5-20	Tolerancing an Angular Surface Using a Combination of Linear and Angular Dimensions	51
5-21	Specifying Tapers	52
5-22	Specifying a Basic Taper and a Basic Diameter	52
5-23	Specifying a Flat Taper	52
5-24	Specifying a Radius	52
5-25	Specifying a Controlled Radius	53
5-26	Statistical Tolerancing	53
5-27	Statistical Tolerancing With Arithmetic Limits	53
5-28	Statistical Tolerancing With Geometric Controls	53
6-1	Geometric Characteristic Symbols	59
6-2	Datum Feature Symbol	59
6-3	Datum Feature Symbols on a Feature Surface and an Extension Line	59
6-4	Placement of Datum Feature Symbols on Features of Size	60
6-5	Placement of Datum Feature Symbol in Conjunction With a Feature Control Frame	60
6-6	Two Datum Features Establishing a Single Datum Plane	61
6-7	Datum Target Symbol Examples	61
6-8	Datum Target Point	61
6-9	Datum Target Line	62
6-10	Datum Target Area	62
6-11	Basic Dimension Symbol Application	63

6-12	Modifying Symbols	63
6-13	Indicating That the Specified Tolerance Is a Statistical Geometric Tolerance	63
6-14	Statistical Tolerance Symbol	63
6-15	“Between” Symbol	63
6-16	Counterbore and Spotface Symbols	64
6-17	Countersink Symbol	64
6-18	Depth Symbol	64
6-19	Square Symbol	65
6-20	Dimension Origin Symbol	65
6-21	Application of “All Over” and “All Around” Symbols	65
6-22	Feature Control Frame With “Free State” Symbol	65
6-23	Application of “Movable Datum Target” Symbol	65
6-24	Feature Control Frame	65
6-25	Feature Control Frame Incorporating a Datum Feature Reference	65
6-26	Order of Precedence of Datum Feature Reference	66
6-27	Multiple Feature Control Frames	66
6-28	Combined Feature Control Frame and Datum Feature Symbol	66
6-29	Feature Control Frame With a Projected Tolerance Zone Symbol	66
6-30	Feature Control Frame Placement	67
6-31	Tabulated Tolerances	69
7-1	Datum Reference Frame	85
7-2	Sequence of Datum Features Relates Part to Datum Reference Frame	86
7-3	Constrained Degrees of Freedom for Primary Datum Features	87
7-4	Part Where Rotational Constraint Is Important	88
7-5	Development of a Datum Reference Frame for the Part in Figure 7-4	89
7-6	Development of a Datum Reference Frame	90
7-7	Datum Plane Establishment	92
7-8	Establishment of Datums for Primary External Cylindrical Datum Feature RMB	92
7-9	Establishment of Datums for Primary Internal Cylindrical Datum Feature RMB	93
7-10	Establishment of Datums for Primary External Datum Width Feature RMB	94
7-11	Establishment of Datums for Primary Internal Datum Width Feature RMB	95
7-12	Development of a Datum Reference Frame With Translation Modifier	96
7-13	Inclined Datum Feature	98
7-14	Part With Cylindrical Datum Feature	99
7-15	Multiple Datum Reference Frames and Their Interrelationships	100
7-16	Two Coaxial Datum Features, Single Datum Axis	101
7-17	Two Datum Features RMB, Single Datum Axis	102
7-18	Hole Pattern Identified as Datum Feature	103
7-19	Effect of Secondary Datum Feature Reference Applicable at RMB and MMB	104
7-20	Effect of Primary Datum Feature Reference Applicable at RMB and MMB	105
7-21	Secondary and Tertiary Datum Features RMB	106
7-22	Example Calculations of MMB	107
7-23	Example Calculations of LMB	108
7-24	Example Calculations of Maximum External Boundary for RMB Applications	109
7-25	Secondary and Tertiary Datum Features at LMB	110

7-26	Secondary and Tertiary Datum Features at MMB	111
7-27	Planar Common Datum Features	112
7-28	Partial Surface as a Datum Feature	113
7-29	Contoured Surface as a Datum Feature	114
7-30	Contoured Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB	115
7-31	Contoured Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at MMB	115
7-32	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB	116
7-33	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at MMB	116
7-34	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB	117
7-35	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at BSC	117
7-36	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at MMB	118
7-37	Planar Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature at LMB	118
7-38	Size Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB	119
7-39	Size Datum Feature Constraining a Rotational Degree of Freedom: Secondary Datum Feature RMB, Translate	119
7-40	Irregular and Regular Features of Size as Datum Features	120
7-41	Coaxial Irregular Datum Feature of Size	122
7-42	Possible Datum Feature and True Geometric Counterparts From Three Pins Used as an Irregular Feature of Size	124
7-43	Mating Parts for Functional Datum Section	125
7-44	Functional Datum Application: Pulley	126
7-45	Functional Datum Application: Adapter	127
7-46	Simultaneous Position and Profile Tolerances	128
7-47	Part With Nominally Aligned Features: Simultaneous Requirement	129
7-48	Part With Nominally Aligned Features: Separate Requirements	130
7-49	Restrained Condition Application	131
7-50	Indication of Unrestrained Datum Targets for a Primary Multiple Datum Feature Reference	132
7-51	Indication of Unrestrained Datum Targets for a Secondary Datum Feature Reference	133
7-52	Planar Combined Datum Features	134
7-53	Datum Targets Used to Establish Datum Reference Frame for Complex Part	135
7-54	Datum Reference Frame Identification	136
7-55	Conical Datum Feature Referenced to Constrain Five Degrees of Freedom	137
7-56	Conical Datum Feature Reference Customized to Constrain Four Degrees of Freedom	138
7-57	Customized Datum Reference Frame	139
7-58	Application of Movable Datum Targets	140
7-59	Datum Target Spheres	142
7-60	Application of Datum Targets to Establish a Datum Reference Frame	143
7-61	Primary Datum Axis Established by Datum Target Points on a Single Cylindrical Feature	144

7-62	Primary and Secondary Datums Established by Datum Target Lines on Two Cylindrical Features and a Surface	145
7-63	Datum Target Line and Area	146
7-64	Secondary Datum Axis	147
8-1	Specifying Straightness of a Flat Surface	151
8-2	Specifying Straightness of Surface Elements	152
8-3	Specifying Straightness RFS	153
8-4	Specifying Straightness at MMC	154
8-5	Specifying Straightness per Unit Length With Specified Total Straightness, Both RFS	155
8-6	Possible Results of Specifying Straightness per Unit Length RFS, With No Specified Total	156
8-7	Specifying Flatness of a Surface	156
8-8	Specifying Flatness of a Derived Median Plane RFS	157
8-9	Specifying Flatness of a Derived Median Plane at MMC	158
8-10	Specifying Circularity for a Cylinder or Cone	159
8-11	Specifying Circularity of a Sphere	160
8-12	Specifying Cylindricity	160
8-13	Specifying Circularity With Average Diameter	161
8-14	Specifying Restraint for Nonrigid Parts	162
9-1	Specifying Angularity for a Plane Surface	165
9-2	Specifying Parallelism for a Plane Surface	165
9-3	Specifying Perpendicularity for a Plane Surface	166
9-4	Specifying Orientation for a Plane Surface Relative to Two Datums	166
9-5	Specifying Perpendicularity for a Center Plane (Feature RFS)	167
9-6	Specifying Angularity for an Axis (Feature RFS)	167
9-7	Specifying Parallelism for an Axis (Feature RFS)	168
9-8	Specifying Angularity for an Axis With Two Datum Feature References (Feature RFS)	169
9-9	Specifying Parallelism for an Axis (Both Feature and Datum Feature RFS)	170
9-10	Specifying Parallelism for an Axis (Feature at MMC and Datum Feature RFS)	171
9-11	Specifying Perpendicularity for an Axis at a Projected Height (Threaded Hole or Insert at MMC)	172
9-12	Specifying Perpendicularity for an Axis (Pin or Boss RFS)	173
9-13	Specifying Perpendicularity for an Axis Showing Acceptance Boundary (Pin or Boss at MMC)	174
9-14	Specifying Perpendicularity for an Axis (Zero Tolerance at MMC)	175
9-15	Specifying Perpendicularity for an Axis (Zero Tolerance at MMC With a Maximum Specified)	176
9-16	Specifying Orientation for a Curved Surface Relative to a Planar Datum Feature	177
9-17	Specifying Parallelism With a Tangent Plane and Profile of a Surface	178
9-18	Specifying Parallelism With a Tangent Plane	178
10-1	Identifying Basic Dimensions	189
10-2	Positional Tolerancing With Datum References	190
10-3	Positional Tolerancing Relative to Planar Datum Feature Surfaces	191
10-4	Positional Tolerancing at MMC Relative to Datum Feature Center Planes	192
10-5	RFS Applicable to a Feature Tolerance and RMB Applied to a Datum Feature Reference	192
10-6	Possible Axis Interpretation Error	193
10-7	Boundary for Surface of a Hole at MMC	193
10-8	Surface Interpretation for Position Tolerance at MMC	194
10-9	Axis Interpretation for Position Tolerance at MMC	194

10-10	Increase in Positional Tolerance Where Hole Is Not at MMC	195
10-11	Positional Tolerancing at MMC	195
10-12	Zero Positional Tolerancing at MMC	196
10-13	Increase in Positional Tolerance Where Hole Is Not at LMC	196
10-14	LMC Applied to Boss and Hole	197
10-15	Zero Tolerance at LMC Applied to Boss and Hole	198
10-16	LMC Applied to a Single Feature	199
10-17	LMC Applied to Pattern of Slots	200
10-18	Datum Feature at LMB	200
10-19	Datum Feature Referenced at MMB	201
10-20	Interference Diagram, Fastener and Hole	202
10-21	Basis for Projected Tolerance Zone	202
10-22	Projected Tolerance Zone Specified	202
10-23	Projected Tolerance Zone Indicated With Chain Line	203
10-24	Projected Tolerance Zone Applied for Studs or Dowel Pins	203
10-25	Same Positional Tolerance for Holes and Counterbores, Same Datum References	203
10-26	Different Positional Tolerances for Holes and Counterbores, Same Datum References	204
10-27	Positional Tolerances for Holes and Counterbores, Different Datum References	204
10-28	Different Positional Tolerance at Each End of a Long Hole	205
10-29	Bidirectional Positional Tolerancing, Rectangular Coordinate Method	205
10-30	Bidirectional Positional Tolerancing, Polar Coordinate Method	206
10-31	Positional Tolerancing of Tabs	206
10-32	Positional Tolerancing of Slots	207
10-33	Virtual Condition for Surfaces of Slot at MMC	207
10-34	Tolerance Zone for Center Plane of Slot at MMC	207
10-35	Positional Tolerancing, Boundary Concept	208
10-36	Spherical Feature Located by Positional Tolerancing	210
10-37	Nonparallel Holes Including Those Not Normal to the Surface	211
10-38	Multiple Patterns of Features	212
10-39	Hole Patterns Located by Composite Positional Tolerancing	214
10-40	Hole Patterns of Figure 10-38 With Secondary Datums in Feature-Relating Segments of Composite Feature Control Frames	218
10-41	Composite Positional Tolerancing of a Circular Pattern of Features	219
10-42	Radial Hole Pattern Located by Composite Positional Tolerancing — Repeated Primary Datum Reference	220
10-43	Radial Hole Pattern Located by Composite Positional Tolerancing — Repeated All Datum References	222
10-44	Orientation Relative to Three Datum Planes	223
10-45	Positional Tolerancing for Coaxial Holes of Same Size, Partial (Parallelism) Refinement of Feature-Relating Axis Relative to Datums A and B With Further Refinement of Parallelism to Datum A	224
10-46	Three-Segment Composite Tolerance	226
10-47	Multiple Single-Segment Feature Control Frames With Secondary Datum in Lower Feature Control Frame	227
10-48	Positional Tolerancing With Multiple Single-Segment Feature Control Frames	229
10-49	Radial Hole Pattern Located by Multiple Single-Segment Feature Control Frames	230

10-50	Positional Tolerancing for Coaxial Holes of Same Size	231
10-51	Positional Tolerancing for Coaxial Holes of Same Size, Partial (Parallelism) Refinement of Feature of Feature-Relating Axis	232
10-52	Positional Tolerancing for Multiple Features of More Than One Size	232
10-53	Multiple Patterns of Features, Simultaneous Requirement	233
10-54	Multiple Patterns of Features, Separate Requirements	235
10-55	Multiple Positional Tolerancing for a Pattern of Features	236
10-56	Positional Tolerancing for Coaxiality	237
10-57	Feature Controlled With Positional Tolerance RFS and Datum Referenced RMB for Coaxiality	238
10-58	Two Datum Features, Single Datum Axis	238
10-59	Positional Tolerancing at MMC for Symmetrical Features	239
10-60	Positional Tolerancing RFS for Symmetrical Features	239
11-1	Profile of a Surface Application (Bilateral)	246
11-2	Profile of a Surface Application (Unilaterally Inside)	247
11-3	Profile of a Surface Application (Unilaterally Outside)	248
11-4	Profile of a Surface Application (Unequally Disposed)	249
11-5	Specifying the Profile of a Surface for Sharp Corners	250
11-6	Specifying Profile of a Surface All Around	251
11-7	Application of Profile of a Surface Tolerance to a Basic Contour	252
11-8	Specifying Different Profile Tolerances on Segments of a Profile	253
11-9	Specifying Profile of a Surface Between Points	254
11-10	Specifying Profile of a Surface All Over	255
11-11	Nonuniform Profile Tolerance Zone	255
11-12	Nonuniform Profile Tolerance Zone With Multiple Segments	256
11-13	Nonuniform Profile Tolerance Zone With Zones to Smooth Transitions	257
11-14	Nonuniform Profile Tolerance Zone Alternate Practice	258
11-15	Specifying the Profile of a Surface for a Plane Surface	259
11-16	Specifying the Profile of a Surface for Coplanar Surfaces	260
11-17	Specifying the Profile of a Surface for Coplanar Surfaces to a Datum Established by Two Surfaces	261
11-18	Specifying the Profile of a Surface for Stepped Surfaces	262
11-19	Specifying the Profile of a Conical Feature	262
11-20	Profile Tolerancing of a Conical Feature, Datum Related	263
11-21	The Toleranced Feature Is a Referenced Datum Feature	264
11-22	The Toleranced Feature Includes Referenced Datum Targets	265
11-23	“Continuous Feature” Symbol Application in a Profile Tolerance	266
11-24	Composite Profile Tolerancing of an Irregular Feature	267
11-25	Composite Profile Tolerancing of a Feature	268
11-26	Pattern Located by Composite Profile Tolerancing — Repeated Primary Datum Feature Reference	269
11-27	Pattern Located by Composite Profile Tolerancing — Repeated Primary and Secondary Datum Feature References	272
11-28	Irregular Shaped Feature With a Profile Size/Form Control and the Pattern Located by Composite Profile Tolerance	275
11-29	MMC Principle Used With Profile Controls	276
11-30	Profile of a Surface of Revolution	277
11-31	Specifying the Combined Profile of a Surface and a Line Tolerance	278

11-32	Profile of a Line and Size Control	280
11-33	Specifying Perpendicularity for a Radial Element of a Surface	281
11-34	Constrained Degree of Freedom Used With Profile of a Line	282
11-35	Composite Profile With Dynamic Profile to Control Form	283
11-36	Composite Profile With Dynamic Profile to Control Form and Constrain Rotational Degrees of Freedom	284
11-37	Use of Dynamic Profile in a Two-Single-Segment Profile Tolerance	285
11-38	Dynamic Profile of a Surface of Revolution	286
12-1	Features Applicable to Runout Tolerancing	290
12-2	Specifying Circular Runout — Small Size Tolerance and Large Runout Tolerance	291
12-3	Specifying Circular Runout Relative to a Datum Axis	292
12-4	Total Runout Applied on a Cylinder and Referenced to a Datum Axis	293
12-5	Total Runout Applied on a Face Surface and Referenced to a Datum Axis	294
12-6	Size and Runout Tolerance Effects	295
12-7	Specifying Circular Runout Using a Large Size Tolerance and a Small Runout Tolerance	296
12-8	Specifying Total Runout Using a Large Size Tolerance and a Small Runout Tolerance	297
12-9	Specifying Runout Relative to Two Cylindrical Datum Features	298
12-10	Specifying Runout to a Surface and Diameter	299
12-11	Specifying Runout Relative to Two Datum Diameters With Form Control Specified	300
12-12	Specifying Runout Relative to a Surface and Diameter With Form Control Specified	301
12-13	Total Runout Tolerance Applied to a Tangent Plane	302
12-14	Total Runout Tolerance Applied to a Tangent Plane With Alternate Method to Establish Datum Axis	303
12-15	Surface Profile Tolerance Applied to a Tangent Plane	304
12-16	Runout Tolerance Applied on an Assembly	305
I-1	Tolerance Accumulation	308
I-2	Tolerance Accumulation Ambiguity	309
A-1	Specifying Total Runout Relative to a Datum Diameter	314
B-1	Floating Fasteners	317
B-2	Fixed Fasteners	317
B-3	Coaxial Features	317
C-1	Form and Proportion of Datum Symbols	319
C-2	Form and Proportion of Geometric Characteristic Symbols	320
C-3	Form and Proportion of Geometric Dimensioning Symbols	321
C-4	Form and Proportion of Modifying Symbols	322
C-5	Form and Proportion of Dimensioning Symbols and Letters	323
C-6	Comparison of Symbols	324
C-7	Comparison of Other Symbols	325

FOREWORD

This issue is a revision of ASME Y14.5-2009, Dimensioning and Tolerancing. The objectives for this revision are to correct any inconsistencies in the previous edition, to determine actions based on deferred comments from the review of the previous edition's draft, to include model-based applications in many of the example figures, and to address proposals submitted by the public or members of the Subcommittee. Based on guidance from the Y14 Committee, the material formerly in Section 1 has been reorganized into [Sections 1](#) through [4](#), and the subsequent Sections have been renumbered.

Because of the widespread use of computer-aided design (CAD) and the industry transition toward reduced use of orthographic views for product definition, model views were added in many figures throughout the Standard. This is in part to ensure that this Standard is applicable to the use of dimensions and tolerances in models and model-based drawings. The methods of application in model views are currently defined in ASME Y14.41, but the meanings of the tolerances are defined in this Standard.

The Foreword of ASME Y14.5-2009 pointed out the increasing importance for design to more precisely state functional requirements through the use of geometric dimensioning and tolerancing (GD&T), and not to rely on the less definitive method of directly applied limit dimensions for form, orientation, location, and profile of part features. This 2018 revision emphasizes the use of profile for location tolerances applied to surfaces; the use of plus and minus tolerances has been moved to an Appendix that is likely to be removed in the next revision.

With a focus on making the transition from the previous edition to this edition simple, no reversals of tolerancing concepts have been made. However, two past practices, use of concentricity and use of symmetry symbols, are no longer supported. Both have been eliminated because other characteristics provide more direct control of features and establish requirements that have a well-defined meaning. Deletion of the symbols does not leave industry without a means to control coaxial or symmetrical features, but it does eliminate the confusion that surrounds these symbols and their misapplication.

Text and figure edits were made to improve readability and clarify content. Changes in sentence structure, organization of content, and method of illustration are not an indication of technical changes.

Work on this issue began at a meeting in Sarasota, Florida, in April 2009. Numerous deferred comments from the public review for the previous revision, as well as new proposals for revision and improvement from the Subcommittee and interested parties in the user community, were evaluated at subsequent semiannual meetings. The first draft entered the review process after it was completed in August 2015. Additional technical improvements and numerous editorial changes were made based on the comments received.

A Nonmandatory Appendix provides information about many of the updates in this edition of this Standard. One of the updates is an explicit statement that unless otherwise specified by drawing/model note or reference to a separate document, the as-designed dimension value does not establish a functional or manufacturing target. In addition, the term "true geometric counterpart" has replaced the term "theoretical datum feature simulator." The use of the "true geometric counterpart" term is limited to datums.

This Standard is available for public review on a continuing basis. This provides an opportunity for additional public-review input from industry, academia, regulatory agencies, and the public-at-large.

This revision was approved as an American National Standard on August 13, 2018.

ASME Y14 COMMITTEE

Engineering Product Definition and Related Documentation Practices

(The following is the roster of the Committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

W. A. Kaba, Jr., *Chair*
J. I. Miles, *Vice Chair*
F. Constantino, *Secretary*

STANDARDS COMMITTEE PERSONNEL

A. R. Anderson , Dimensional Dynamics, LLC	A. Krulikowski , Krulikowski Consulting, LLC
F. Bakos , Consultant	E. McCarthy , E. F. McCarthy Consulting, Inc.
J. V. Burleigh , Unaffiliated	P. J. McCuistion , Multimac
F. Constantino , The American Society of Mechanical Engineers	J. D. Meadows , James D. Meadows & Associates, Inc.
D. O. Coon , Bell Helicopter	M. E. Meloro , Northrop Grumman Corp.
R. Courson , SAE International	J. I. Miles , Technical Consultants, Inc.
K. Dobert , Siemens PLM Software	M. A. Murphy , Unaffiliated
S. Hauger , Deere & Co.	H. W. Oakes , USAF University of Dayton Research Institute
J. B. Hoskins , Boeing Co.	B. A. Wilson , Consultant
J. Houck , Woodward, Inc.	E. F. Zwettler , Rolls-Royce Corp.
R. C. Jensen , Hexagon Manufacturing Intelligence	K. E. Wiegandt , <i>Contributing Member</i> , Consultant
W. A. Kaba, Jr. , Spirit AeroSystems, Inc.	

SUBCOMMITTEE 5 — DIMENSIONING AND TOLERANCING

B. A. Wilson , <i>Chair</i> , Consultant	P. Mares , Boeing Co.
A. G. Neumann , <i>Vice Chair</i> , Technical Consultants, Inc.	E. McCarthy , E. F. McCarthy Consulting, Inc.
M. E. Meloro , <i>Secretary</i> , Northrop Grumman Corp.	P. J. McCuistion , Multimac
A. R. Anderson , Dimensional Dynamics, LLC	M. A. Murphy , Unaffiliated
G. Arnold , GE Appliances/Haier	D. W. Shepherd , Shepherd Industries
F. Bakos , Consultant	P. C. Tillet , Naval Surface Warfare Center, Dahlgren Division
R. Courson , SAE International	D. Watts , Validate-3D, LLC
D. E. Day , Tec-Ease, Inc.	M. P. Wright , Lockheed Martin Aeronautics Co.
K. Dobert , Siemens PLM Software	E. F. Zwettler , Rolls-Royce Corp.
P. J. Drake, Jr. , MechSigma Consulting, Inc.	Jichang Yu , <i>Delegate</i> , Standardization Administration of China
B. R. Fischer , TDP 360, LLC	D. O. Coon , <i>Alternate</i> , Bell Helicopter
A. R. Gellings , Deere & Co.	J. Houck , <i>Alternate</i> , Woodward, Inc.
R. C. Hughes , El Camino College	N. W. Cutler , <i>Contributing Member</i> , Dimensional Management, Inc.
R. C. Jensen , Hexagon Manufacturing Intelligence	C. Houk , <i>Contributing Member</i> , Consultant
A. Krulikowski , Krulikowski Consulting, LLC	J. D. Keith , <i>Contributing Member</i> , Consultant

SUBCOMMITTEE 5 — SUPPORT GROUP

G. Fisher , Rolls-Royce Corp.	J. I. Miles , Technical Consultants, Inc.
M. Foster , Applied Geometrics, Inc.	S. Neumann , Technical Consultants, Inc.
J. D. Meadows , James D. Meadows & Associates, Inc.	J. Scheibel , Boeing Co.
P. Meadows , RCO Engineering, Inc.	R. A. Wheeler , RW-OptDesign, LLC

CORRESPONDENCE WITH THE Y14 COMMITTEE

General. ASME Standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions or a case, and attending Committee meetings. Correspondence should be addressed to:

Secretary, Y14 Standards Committee
The American Society of Mechanical Engineers
Two Park Avenue
New York, NY 10016-5990
<http://go.asme.org/Inquiry>

Proposing Revisions. Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

Proposing a Case. Cases may be issued to provide alternative rules when justified, to permit early implementation of an approved revision when the need is urgent, or to provide rules not covered by existing provisions. Cases are effective immediately upon ASME approval and shall be posted on the ASME Committee web page.

Requests for Cases shall provide a Statement of Need and Background Information. The request should identify the Standard and the paragraph, figure, or table number(s), and be written as a Question and Reply in the same format as existing Cases. Requests for Cases should also indicate the applicable edition(s) of the Standard to which the proposed Case applies.

Attending Committee Meetings. The Y14 Standards Committee regularly holds meetings and/or telephone conferences that are open to the public. Persons wishing to attend any meeting and/or telephone conference should contact the Secretary of the Y14 Standards Committee. Future Committee meeting dates and locations can be found on the Committee Page at <http://go.asme.org/Y14committee>.

Section 1

Scope

1.1 INTRODUCTION

This Standard establishes symbols, rules, definitions, requirements, defaults, and recommended practices for stating and interpreting dimensioning, tolerancing, and related requirements for use on engineering drawings, models defined in digital data files, and related documents. For a mathematical explanation of many of the principles in this Standard, see ASME Y14.5.1M. Additional uniform practices for applying dimensions, tolerances, and related requirements in digital data sets are defined in ASME Y14.41. Practices unique to architectural and civil engineering and welding symbology are not included in this Standard.

1.2 GENERAL

Sections 1 through 4 establish related references, definitions, fundamental rules, and practices for general dimensioning. For tolerancing practices, see Sections 5 through 12. Additional information about tolerancing is in [Mandatory Appendix I](#) and [Nonmandatory Appendices A](#) through [D](#).

1.3 REFERENCE TO THIS STANDARD

When engineering documentation is based on this Standard, this fact shall be noted on the documentation or in a referenced separate document. References to this Standard shall include the designation of ASME Y14.5-2018.

1.4 ASME Y14 SERIES CONVENTIONS

The conventions in [paras. 1.4.1](#) through [1.4.10](#) are used in this and other ASME Y14 standards.

1.4.1 Mandatory, Recommended, Guidance, and Optional Words

- (a) The word “shall” establishes a requirement.
- (b) The word “will” establishes a declaration of purpose on the part of the design activity.
- (c) The word “should” establishes a recommended practice.
- (d) The word “may” establishes an allowed practice.

(e) The words “typical,” “example,” “for reference,” and the Latin abbreviation “e.g.” indicate suggestions given for guidance only.

(f) The word “or” used in conjunction with a requirement or a recommended practice indicates that there are two or more options for complying with the stated requirement or practice.

(g) The phrase “unless otherwise specified” (UOS) shall be used to indicate a default requirement. The phrase is used when the default is a generally applied requirement and an exception may be provided by another document or requirement.

1.4.2 Cross-Reference of Standards

Cross-reference of standards in text with or without a date following the standard designator shall be interpreted as follows:

(a) Reference to other ASME Y14 standards in the text without a date following the standard designator indicates that the issue of the standard identified in the References section ([Section 2](#)) shall be used to meet the requirement.

(b) Reference to other ASME Y14 standards in the text with a date following the standard designator indicates that only that issue of the standard shall be used to meet the requirement.

1.4.3 Invocation of Referenced Standards

The following examples define the invocation of a standard when specified in the References section ([Section 2](#)) and referenced in the text of this Standard:

(a) When a referenced standard is cited in the text with no limitations to a specific subject or paragraph(s) of the standard, the entire standard is invoked. For example, “Dimensioning and tolerancing shall be in accordance with ASME Y14.5” is invoking the complete standard because the subject of the standard is dimensioning and tolerancing and no specific subject or paragraph(s) within the standard are invoked.

(b) When a referenced standard is cited in the text with limitations to a specific subject or paragraph(s) of the standard, only the paragraph(s) on that subject are invoked. For example, “Assign part or identifying numbers in accordance with ASME Y14.100” is only invoking the paragraph(s) on part or identifying numbers because the subject of the standard is