

ANSI/AWWA **B406-20**  
(Revision of ANSI/AWWA B406-14)

AWWA Standard

# Ferric Sulfate

**Effective date: Aug. 1, 2020.**

Replaces incorporated Aug. 2020.

First edition approved by Board of Directors Jan. 23, 1961.

1995 edition approved Jan. 23, 2020.

Approved by American National Standards Institute Feb. 11, 2020.



American Water Works  
Association




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

**CAUTION NOTICE:** The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or e-mailing [info@ansi.org](mailto:info@ansi.org).

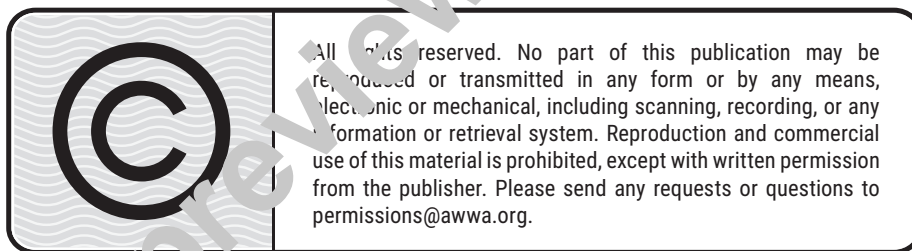

ISBN-13, print: 978-1-64717-011-2

ISBN-13, electronic: 978-1-61300-557-6

DOI: <http://dx.doi.org/10.12999/AWWA.B406.20>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2020 by American Water Works Association  
Printed in USA

## Committee Personnel

The AWWA Standards Committee on Iron Salts, Aluminum Salts, and Related Coagulant Aids, which reviewed and approved this standard, had the following personnel at the time of approval:

Glenn R. Evers, *Chair*

### *General Interest Members*

K.K. Au, FMC Global Peroxygens, Naperville, Ill.

B. Bickerton, CBCL Limited, Halifax, N.S.

N. Edman (*liaison, nonvoting*), Standards Group Liaison, AWWA, Denver, Colo.

J.D. Edwards, Westerville, Ohio

J.J. Gemin, AECOM, Kitchener, Ont.

P.H. Hargette, Black & Veatch Corporation, Greenville, S.C.

G.A. Iversen, Hazen and Sawyer, Raleigh, N.C.

C.B. Lind, Mauser Corporation, East Brunswick, N.J.

D.W. Mazyck (*liaison, nonvoting*), Standards Council Liaison, Gainesville, Fla.

J.W. Patterson, J.W. Patterson Environmental Consultants, Silverthorne, Colo.

### *Producer Members*

T.A. Badwak, USALCO LLC, Baltimore, Md.

J.P. Crass, Ventura, Calif.

D.E. Gordon, QC Corporation, Baltimore, Md.

L.N. Hjersted (*alternate*), Agri-Flow, Lakeland, Fla.

B. Keogh, B.I.K. Water Technologies, Dundas, Ont.

K.E. Ruehl, General Chemical Corporation, Ballwin, Mo.

G. Shull, Yantis, Inc., Ont.

M.R. Snider, Temira, Brantford, Ont.

B. Wodetki, PVS Chemicals Inc., Valparaiso, Ind.

*User Members*

D. Grimes, Fairfax Water, Herndon, Va.

L.V. Landry, Bossier Parish Police Jury, Benton, La.

S.C. Olson, Aquarion Water Company of Massachusetts, Hingham, Mass.

C.A. Owen, Hazen and Sawyer, Tampa, Fla.

B.K. Parsons, City of Social Circle, Social Circle, Ga.

P. Stencel, Dallas Water Utilities, Sunnyvale, Tex.

J.S. Trotter, City of Bloomington Utilities, Ellettsville, Ind.

Currently in preview, click buy full version

# Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b><i>Foreword</i></b>		<b>4</b>	<b>Requirements</b>
I	Introduction..... vii	4.1	Physical Requirements..... 3
I.A	Background..... vii	4.2	Chemical Requirements ..... 3
I.B	History..... vii	4.3	Impurities..... 4
I.C	Acceptance ..... vii	<b>5</b>	<b>Verification</b>
II	Special Issues ..... viii	5.1	Sampling..... 4
II.A	Manufacture and Use of Ferric Sulfate..... viii	5.2	Laboratory Examination..... 5
II.B	Storage and Handling Considerations ..... ix	5.3	Laboratory Samples..... 5
II.C	Basis for Payment ..... ix	5.4	Moisture Content of Dry Ferric Sulfate..... 6
II.D	Free Acid ..... ix	5	Test Procedure for Insoluble Matter. 6
III	Use of This Standard ..... ix	5.6	Test Procedure for Soluble Ferrous Iron..... 7
III.A	Purchaser Options and Alternatives ..... ix	5.7	Test Procedure for Soluble Ferric Iron..... 8
III.B	Modification to Standard ..... x	5.8	Test Procedure for Free Acid In Ferric Sulfate ..... 9
IV	Major Revisions..... x	5.9	Test Procedure for Chloride..... 10
V	Comments ..... x	5.10	Notice of Nonconformance..... 12
<b><i>Standard</i></b>		<b>6</b>	<b>Delivery</b>
<b>1</b>	<b>General</b>	6.1	Marking ..... 13
1.1	Scope..... 1	6.2	Packaging and Shipping ..... 13
1.2	Purpose ..... 1	6.3	Affidavit of Compliance or Certified Analysis..... 14
1.3	Application..... 1		
<b>2</b>	<b>References</b> ..... 1		
<b>3</b>	<b>Definitions</b> ..... 2		

# Foreword

*This foreword is for information only and is not a part of ANSI/AWWA B406.*

## I. Introduction.

I.A. *Background.* Ferric sulfate is used as an inorganic coagulant for removal of suspended and colloidal particles from water by coagulation and flocculation. It is prepared by oxidizing ferrous sulfate or by dissolving ferric oxide in sulfuric acid. Ferric sulfate is available in dry form as a powdery-granular product, grayish-white or reddish-gray in color, or as a stable solution that is relatively clear and reddish brown in color. The term *ferric sulfate* as used in this standard refers to the manufactured ferric sulfate product, a partially hydrated dry ferric sulfate having the basic formula  $\text{Fe}_2(\text{SO}_4)_3 \cdot x\text{H}_2\text{O}$  in which  $x$  averages approximately 9. This ferric sulfate dissolves rapidly in water, as contrasted with anhydrous ferric sulfate, which dissolves very slowly in water. Similarly, in this standard the term *liquid ferric sulfate* refers to a solution of ferric sulfate containing between 10 percent and 14 percent ferric iron by weight. This percentage may be varied by agreement between the supplier and purchaser.

I.B. *History.* This standard was first approved as tentative on Jan. 23, 1961, by the AWWA Board of Directors, and was approved as a standard on Feb. 11, 1964. Subsequent revisions to ANSI/AWWA B406 were approved by the AWWA Board of Directors in 1987, 1992, 1997, 2006, and 2014. This edition of B406 was approved by the AWWA Board of Directors on Jan. 23, 2020.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.<sup>†</sup> Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

<sup>†</sup> Persons outside the United States should contact the appropriate authority having jurisdiction.

agencies may use various references, including two standards developed under the direction of NSF,\* NSF/ANSI/CAN† 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI/CAN 60. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdiction. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI/CAN 60 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA B406 addresses additives requirements in Sec. 4.3 of the standard. The transfer of contaminants from chemicals to processed water to residual solids is becoming a problem of greater concern. The language in Sec. 4.3.2 is a recommendation only for direct additives used in the treatment of potable water to be certified by an accredited certification organization in accordance with NSF/ANSI/CAN 60, Drinking Water Treatment Chemicals—Health Effects. However, users of the standard may opt to make this certification a requirement for the product. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

## II. Special Issues.

II.A. *Manufacture and Use of Ferric Sulfate.* Because of the corrosivity of chloride on some metals, this edition of ANSI/AWWA B406 includes a limitation on chloride impurity of 10 ppm Cl<sup>-</sup> per 1 percent of contained ferric iron. This limitation is based on a static-test corrosion test using liquid ferric sulfate, which contained 10 percent ferric iron in a solution containing up to 1,000 ppm Cl<sup>-</sup> held at 100°F (38°C), in which no corrosion of 304 or 316 stainless steel resulted during 21 days of contact.

---

\* NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

† Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

Mild steel as a control, however, was consumed in several days, regardless of the presence or absence of chlorides. Because a hot ferric sulfate solution containing chlorides may increase corrosivity or extraction of metal impurities when loaded, stored, or used at product temperatures exceeding 100°F (38°C), the purchaser may wish to discuss with the supplier the level of chlorides, temperatures, and potential corrosivity, particularly with temperatures exceeding 100°F (38°C).

II.B. *Storage and Handling Considerations.* Dry ferric sulfate is mildly hygroscopic and should, therefore, be stored in a dry place. When feeding ferric sulfate, the correct water ratio (quantity of water to weight of material in the dissolving tank) should be maintained. The feeding equipment manufacturer's directions for feeding should be followed.

Liquid ferric sulfate should be stored in corrosion-resistant tanks and metered into the water as required with appropriate metering equipment. While liquid ferric sulfate remains a stable liquid for at least 72 h at 32°F (0°C) without freezing or crystallizing, with only a slight increase in viscosity, it is recommended that tanks be insulated or heated if prolonged periods of temperature below 32°F (0°C) are normally expected.

Human exposure to either dry or liquid ferric sulfate should be minimized by adequate ventilation, protective clothing, good hygiene, and careful "housekeeping" practices. Personnel handling dry ferric sulfate should wear goggles, a dust mask, gloves, and other protective clothing. Those handling liquid ferric sulfate should wear goggles, gloves, and an acid-resistant apron. Splashing or misting of the liquid should be avoided. A respirator with an activated carbon filter suitable for a weak sulfuric acid mist should be worn when handling liquid ferric sulfate.

II.C. *Basis for Payment.* The basis for payment shall be the net weight of ferric sulfate supplied, excluding the weight of the shipping container.

II.D. *Free Acid.* Liquid ferric sulfate can be manufactured with free sulfuric acid levels from 0 percent to over 3.5 percent. The purchaser and supplier may agree on a free acid level in excess of or lower than the standard maximum depending on the application.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following information should be provided by the purchaser.

1. Standard used—that is, ANSI/AWWA B406, Ferric Sulfate, of latest revision.
2. Type of ferric sulfate to be supplied.

3. Whether compliance with NSF/ANSI/CAN 60, Drinking Water Treatment Chemicals—Health Effects, is required.

4. If requesting impurity information, the purchaser must state maximum impurity content limits and the analytical methods to be used to determine compliance with the limits (Sec. 4.3).

5. Quantity of ferric sulfate required and method of packaging and shipping (Section 5 and Section 6).

6. If an analysis by a referee laboratory is required (Sec. 5.10.1), the assignment of testing costs should be addressed.

7. Whether weight certificates are required (Sec. 6.2.5).

8. An affidavit of compliance, certified analysis, or both, if required (Sec. 6.3).

9. Details of federal, state, and local requirements (Section 4).

10. Whether the purchaser will reject product from containers or packaging with missing or damaged seals. The purchaser may reject product from bulk containers or packages with missing or damaged seals unless the purchaser's tests of representative samples, conducted in accordance with Sec. 5.5, Sec. 5.6, Sec. 5.8, and Sec. 5.9, demonstrate that the product meets the standard. Failure to meet the standard or the absence of, or irregularities in, seals may be sufficient cause to reject a shipment.

11. Whether alternative security measures have been adopted to replace or augment the security measures set out in Sec. 6.2.6 and 6.2.7.

III.B. *Modification to Standard.* Any modification of the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** Major revisions made to the standard in this edition include the following:

1. Minor boilerplate text revisions to the following sections:

- 4.3.2 Product certifications
- 6.2.7.2 Chain of Custody
- 6.3 Affidavit of Compliance or Certified Analysis

**V. Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.794.57603, write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098, or email at standards@awwa.org.



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA B406-20**  
(Revision of ANSI/AWWA B406-14)

**AWWA Standard**

---

## Ferric Sulfate

---

### SECTION 1: GENERAL

---

**Sec. 1.1 Scope**

This standard describes dry-form ferric sulfate and liquid ferric sulfate for use in the treatment of potable water, wastewater, or reclaimed water.

**Sec. 1.2 Purpose**

The purpose of this standard is to provide minimum requirements for ferric sulfate, including physical, chemical, sampling, packaging, shipping, and testing requirements.

**Sec. 1.3 Application**

This standard can be referenced in documents for purchasing and receiving ferric sulfate and can be used as a guide for testing the physical and chemical properties of ferric sulfate. The stipulations of this standard apply when this document has been referenced and then only to ferric sulfate used in the treatment of potable water, wastewater, or reclaimed water.

---

### SECTION 2: REFERENCES

---

This standard references the following document. In its latest edition, it forms a part of this standard to the extent specified within the standard. In any case of conflict, the requirements of this standard shall prevail.