



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA C508-17
(Revision of ANSI/AWWA C508-09)

AWWA Standard

Swing-Check Valves for Waterworks Service, 2-In. Through 48-In. (50-mm Through 1,200-mm) NPS

Effective date: June 1, 2017.

First edition approved by AWWA Board of Directors June 20, 1976.

This edition approved Jan. 14, 2017.

Approved by American National Standards Institute Jan. 3, 2017.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed on the first page of the Official Notice section of *Journal – American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal – American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval notice on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or emailing info@ansi.org

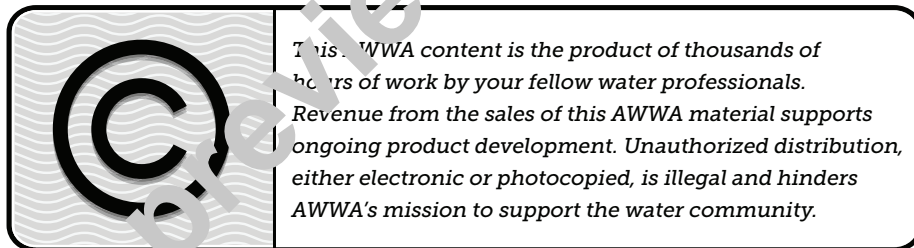

ISBN-13, print: 978-1-62576-220-7

eISBN-13, electronic: 978-1-61300-420-3

DOI: <http://dx.doi.org/10.12999/AWWA.C508.17>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2017 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Subcommittee for Swing-Check Valves, which reviewed and approved this standard, had the following personnel at the time of approval:

J.V. Ballun, *Chair*

S. Allen, Bray International, Houston, Texas.	(AWWA)
J.V. Ballun, Val-Matic Valve & Manufacturing Corporation, Elmhurst, Ill.	(AWWA)
D.E. Burczynski, Kennedy Valve, Elmira, N.Y.	(AWWA)
P. Gifford, Mueller Company, Chattanooga, Tenn.	(AWWA)
T.C. Harbour, Mueller Company, Elmhurst, Ill.	(AWWA)
R.L. Larkin, American Flow Control, Birmingham, Ala.	(AWWA)
L. Larson, DeZURIK, Sartell, Minn.	(AWWA)
G.E. Laverick, UL LLC, Northbrook, Ill.	(AWWA)
T. O'Shea, DeZURIK-APCO, Schaumburg, Ill.	(AWWA)
N. Peyton, Henry Pratt Company, Aurora, Ill.	(AWWA)
J.H. Wilber, American AVK, Littleton, Colo.	(AWWA)

The AWWA Standards Committee on Gate Valves and Swing-Check Valves, which reviewed and approved this standard, had the following personnel at the time of approval:

Joseph J. Gemin, *Chair*

General Interest Members

J.M. Assouline, CH2M Hill, Englewood, Colo.	(AWWA)
M.D. Bennett, MWH Americas, Cleveland, Ohio	(AWWA)
D. Dieffenbach, Campbell Engineers Inc., Phoenix, Ariz.	(AWWA)
J.J. Gemin, DECOM, Kitchener, Ont., Canada	(AWWA)
J. Hebenscheidt, UL LLC, Northbrook, Ill.	(AWWA)
M.C. Johnson, Utah Water Research Laboratory, Logan, Utah	(AWWA)
J. O'Leary, Advanced Engineering and Environmental Services, Watford City, N.D.	(AWWA)
S.M. Passarelli,* Standards Engineer Liaison, AWWA, Denver, Colo.	(AWWA)
T.R. Volz,† URS Corporation, Denver, Colo.	(AWWA)

* Liaison, nonvoting

† Alternate

Producer Members

J.V. Ballun, Val-Matic Valve & Manufacturing Corporation, Elmhurst, Ill.	(AWWA)
J. Bolender, J&S Valve Inc., Huffman, Texas	(AWWA)
D.E. Burczynski,* Kennedy Valve, Elmira, N.Y.	(AWWA)
S.S. Dalton,* Val-Matic Valve & Manufacturing Corporation, Elmhurst, Ill.	(AWWA)
P. Gifford,* Mueller Company, Chattanooga, Tenn.	(AWWA)
T.C. Harbour, Mueller Company, Decatur, Ill.	(AWWA)
D. Johnston,* East Jordan Iron Works Inc., East Jordan, Mich.	(AWWA)
R.L. Larkin,* American Flow Control, Birmingham, Ala.	(AWWA)
R. Looney, American AVK, Minden, Nev.	(AWWA)
T.J. Mettler, Waterous Company, South Saint Paul, Minn.	(AWWA)
J. Riese, Clow Valve Co., Oskaloosa, Iowa	(AWWA)
D.B. Scott, AMERICAN Flow Control, Birmingham, Ala.	(AWWA)
J.H. Wilber,* American AVK, Littleton, Colo.	(AWWA)
K.J. Wright, East Jordan Iron Works, East Jordan, Mich.	(AWWA)

User Members

M. Garcia,† Standards Council Liaison, Denver Water, Denver, Colo.	(AWWA)
B. Hasanabadi, Colorado Springs Utilities, Colorado Springs, Colo.	(AWWA)
S. Hattan, Tarrant Regional Water District, Ft. Worth, Texas	(AWWA)
K.S. Jeng-Bulloch, City of Houston/PW & Engineering, Houston, Texas	(AWWA)
M. MacConnell, Metro Vancouver, Vancouver, B.C., Canada	(AWWA)
A. Quiniones, US Bureau of Reclamation, Denver, Colo.	(AWWA)
D. M. Rausch, Aurora Water Department, Aurora, Colo.	(AWWA)
P. Ries, Denver Water, Denver, Colo.	(AWWA)

* Alternate

† Liaison, nonvoting

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword			
I	Introduction.....	vii	
I.A	Background.....	vii	
I.B	History.....	vii	
I.C	Acceptance.....	vii	
II	Special Issues.....	viii	
III	Use of This Standard.....	ix	
III.A	Purchaser Options and Alternatives.....	ix	
III.B	Modification to Standard.....	x	
IV	Major Revisions.....	x	
V	Comments.....	x	
Standard			
1	General		
1.1	Scope.....	1	
1.2	Purpose.....	3	
1.3	Application.....	3	
2	References	3	
3	Definitions	5	
4	Requirements		
4.1	Permeation.....	6	
4.2	Data to Be Supplied by Manufacturer.....	7	
4.3	Materials.....	7	
4.4	General Design.....	10	
4.5	Fabrication.....	15	
5	Verification		
5.1	Inspection.....	16	
5.2	Testing.....	16	
5.3	Nonconformance.....	17	
6	Delivery		
6.1	Marking.....	17	
6.2	Packaging and Shipping.....	17	
6.3	Efficiency of Compliance.....	17	
Appendix			
A	Installation, Operation, and Maintenance of Swing-Check Valves for Waterworks Service	19	
A.1	General.....	19	
A.2	Unloading.....	19	
A.3	Storage.....	19	
A.4	Inspection Prior to Installation.....	20	
A.5	Installation.....	20	
A.6	Field Testing.....	20	
A.7	Owner's Records.....	21	
A.8	Operation.....	21	
A.9	Maintenance.....	21	

SEC.	PAGE	SEC.	PAGE
Figure			
1	Various Types of Swing-Check Valves	2	2
			End-To-End Dimensions for Flanged-End Valves
			11
		3	3
			Minimum Thickness for Ductile-Iron Connecting End Flanges
			12
		4	4
			Excess Flange Thickness
			13
Tables			
1	Copper Alloys	8	

Currently in preview, click buy full version

Foreword

This foreword is for information only and is not a part of ANSI/AWWA C508.

I. Introduction.

I.A. *Background.* The swing-check valve has been commonly used in the waterworks industry for over a century. Swing-check valves are designed to prevent backflow by automatically closing upon flow reversal.

I.B. *History.* Following approval by the AWWA Standards Council on June 25, 1970, the Standards Committee on Gate Valves and Swing-Check Valves was assigned the project of preparing a new AWWA standard for swing-check valves. Committee discussion of the first draft began on Nov. 18, 1970. Following an extensive period of discussion and development by user, producer, and general-interest members of that committee, and after extensive review by Committee 117 of the Manufacturers Standardization Society of the Valve and Fittings Industry, the first edition was approved on June 20, 1976. Subsequent editions were approved by the AWWA Board of Directors on Feb. 1, 1982, Jan. 31, 1993, Jan. 23, 2001, and Jan. 25, 2009. This edition was approved on Jan. 14, 2017.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary, third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium include the Water Research Foundation (formerly AwwaRF)[†] and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.[‡] Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† Water Research Foundation, 6666 West Quincy Avenue, Denver, CO 80235.

‡ Persons outside the United States should contact the appropriate authority having jurisdiction.

2. Two standards developed under the direction of NSF*: NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.

3. Other references including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,[†] and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C508 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements including applicable standards.
2. Determine the status of certifications by all parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues.

1. The majority of swing-check valves supplied for pump check installations are provided with an assisted closure feature such as a counterweight or spring to reduce check-valve slam. These requirements should be reviewed with the valve manufacturer.

2. Check valves may be subject to excessive wear if there is insufficient flow to open the valve fully. Manufacturers can supply information during the valve sizing process to prevent this from occurring.

3. This standard requires that the valves be seat tested at the rated working pressure of the valve (Sec. 5.2.2). For applications where a low operating pressure will be encountered, a special low-pressure leak test pressure should be specified.

* NSF International, 789 North Dixboro Rd., Ann Arbor, MI 48113.

† Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

4. Chlorine and chloramine degradation of elastomers: The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact surface area, elastomer cross section, and environmental conditions as well as temperature. Careful selection of and specifications for elastomeric materials and the specifics of their application for each water system component should be considered to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. Purchaser Options and Alternatives. The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C508, Swing-Check Valves for Waterworks Service, 2-in. Through 48-in. (50-mm Through 1,200-mm) NPS, of latest edition.

2. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects, is required, in addition to the requirements of the Safe Drinking Water Act.

3. Size and quantity of check valves.

4. Maximum line pressure.

5. Maximum transient pressure and characteristics, if known.

6. Data required of manufacturer (Sec. 4.2).

7. Detail of other federal, state or provincial, and local requirements (Sec. 4.3).

8. Whether the piping system in which the check valve is to be used carries water that promotes galvanic corrosion and therefore prohibits the use of copper alloy materials containing more than 16 percent zinc (Sec. 4.3.2.2.3).

9. If bolting material having mechanical and chemical properties other than those specified in ASTM A307 is required (Sec. 4.3.2.3).

10. Type of ends required—flanged or mechanical joint, and end-to-end dimensions (Sec. 4.4.2).

11. Detailed description of valve ends, if dimensions or finish are to be other than specified (Sec. 4.4.7).

12. Special coatings and linings (Sec. 4.4.12).
13. Special markings required (Sec. 6.1.2).
14. Affidavit of compliance, if required (Sec. 6.3).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. Major revisions made to the standard in this edition include the following:

1. The size range was increased to 48 in. (1,200 mm).
2. New interior coating requirements were added.
3. Revised laying length designations to “Type A” and “Type B.”
4. Added copper alloys to acceptable material requirements.

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711; FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at standards@awwa.org.



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA C508-17
(Revision of ANSI/AWWA C508-09)

AWWA Standard

Swing-Check Valves for Waterworks Service, 2-In. Through 48-In. (50-mm Through 1,200-mm) NPS

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes only iron-body unassisted swing-check valves, 2-in. through 48-in. (50-mm through 1,200-mm) NPS, with mechanical-joint or flanged ends that are installed in approximately level settings in water systems. The manufacturer should be consulted for special conditions. Check-valve sizes described in this standard are 2, 2½, 3, 4, 6, 8, 10, 12, 14, 16, 18, 20, 24, 30, 36, 42, and 48-in. (50, 65, 75, 100, 150, 200, 250, 300, 350, 400, 450, 500, 600, 750, 900, 1,050, and 1,200 mm) NPS. Sizes refer to the nominal diameter of the waterway through the inlet and outlet connections and the seat.

1.1.1 *Seating types.* Check valves may be of the metal-to-metal, resilient-to-metal, or resilient-to-coated seat construction as illustrated in Figure 1.

1.1.2 *Hinge arm types.* Check valves may incorporate either a metal or resilient-hinge arm as illustrated in Figure 1.

1.1.3 *Waterway types.* Swing-check valves may be of the clear waterway design (where the disc in the full open position swings clear of the waterway) or the full waterway design (where the disc in the full open position is not clear of the waterway, but the body is enlarged to provide full waterway area around the disc).