



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA C621-18
(First Edition)

AWWA Standard

Internal Pipe Joint Seal Assemblies for Water Service

Effective date: Dec. 1, 2018.

First edition approved by AWWA Board of Directors June 11, 2018.

Approved by American National Standards Institute Aug. 16, 2018.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900, or e-mailing info@ansi.org.

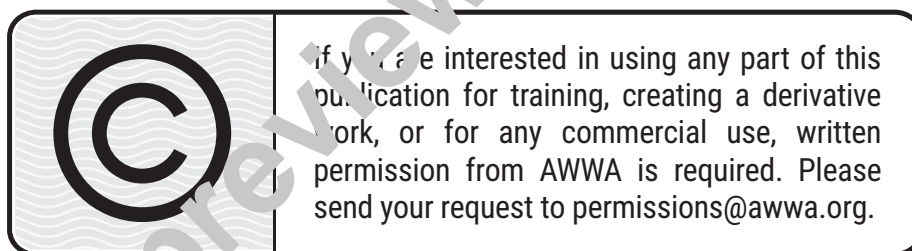

ISBN-13, print: 978-1-62576-301-1

eISBN-13, electronic: 978-1-61300-495-1

DOI: <http://dx.doi.org/10.12999/AWWA.C621.18>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2018 by American Water Works Association

Printed in USA

Committee Personnel

The AWWA Subcommittee for the development of C621, Internal Pipe Joint Seals, had the following personnel at the time:

V. Firat Sever, *Chair*

R.D. Brockway, Trelleborg Pipe Seals, Milford, N.H.

T. Collins, Washington State Department of Transportation, Seattle, Wash.

M. Cronin, Hunting Pipeline Services LLC, Hampden, Mass.

M. Fox, Hydra Tech Engineered Products, Cincinnati, Ohio

J.E. Hohider, Heitkamp Inc., Watertown, Conn.

F.A. McMasters, AECOM, Cleveland, Ohio

M. Najafi, UTS/CUIRE, Arlington, Tex.

B.A. Neu, Mott MacDonald, Jacksonville, Fla.

C.K. Orton, Trenchless Solutions Redwood City, Calif.

V.F. Sever, American Structurepoint, Inc., Columbus, Ohio

C.P. Shelley, Victaulic Company, Doraville, Georgia

D.J. Smith, WaterOne, Lenexa, Kan.

The AWWA Standards Committee on Pipe Rehabilitation, which reviewed and approved this standard, had the following personnel at the time of approval:

Mohammad Najafi, *Chair*

General Interest Members

S. Barraco, Carollo Engineers, Dallas, Tex.

D.O. Carroll,* Standards Engineer Liaison, AWWA, Denver, Colo.

R. Cooper, Evanco Environmental Technologies, Bracebridge, Ont.

W.J. Dixon, Dixon Engineering, Inc., Lake Odessa, Mich.

D. Ellison, HDR, Inc., Ventura, Calif.

A. Fuller,† AECOM, Baltimore, Md.

P. Glus, Malcolm Pirnie, Inc., Long Island City, N.Y.

J. Glynn, RMC Water & Environment, Walnut Creek, Calif.

J. Loiacono, St. Leonard, Que.

* Liaison, nonvoting

† Alternate

E. Meek,* Standards Engineer Liaison, AWWA, Denver, Colo.
M. Najafi, University of Texas at Arlington/CUIRE, Arlington, Tex.
B.A. Neu, Mott MacDonald, Jacksonville, Fla.
L.E. Osborn, LEO Consulting, LLC, Dardenne Prairie, Mo.
V.F. Sever, American Structurepoint, Inc., Columbus, Ohio
J. Turner, Phoenix Civil Engineering, Inc., Santa Paula, Calif.
T.R. Volz, AECOM, Greenwood Village, Colo.
J.S. Wailes, Black Hawk, Colo.

Producer Members

L.J. Assard, Michels Corporation, Watertown, Conn.
D. Cohen, Western Slope Utilities, Breckenridge, Colo.
P. Creelman, Royal Pipe Building Products, Langley, B.C.
M. Davison, Sanexen Environmental Services, Inc., Brossard, Que.
A.F. Jachim, 3M, St. Paul, Minn.
D.P. Kozman, RS Technik, Hilliard, Ohio
K. Oxner, Inliner Technologies LLC, Paoli, Ind.
W.E. Shook, AP/M Permaform, Johnston, Iowa
K. Weisenberg, SIPP Technologies, Jacksonville, Fla.

User Members

W.A. Fritz, Great Lakes Water Authority, Detroit, Mich.
M.E. Grahek, Los Angeles Department of Water, Los Angeles, Calif.
T.M. Kennedy, Rainbow Municipal Water District, Fallbrook, Calif.
D.F. Lesnieski, Connecticut Water Company, East Windsor, Conn.
T.L. White, City of Vista, Buena Sanitation District, Vista, Calif.

* Liaison, nonvoting

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword		4	Requirements
I	vii	4.1	5
I.A	vii	4.2	5
I.B	vii	4.3	7
I.C	vii	4.4	8
II	viii	4.5	8
II.A	viii	5	Verification
	viii	5.1	11
II.B	ix	5.2	11
	ix	5.3	12
III	ix	6	Delivery
III.A	ix	6.1	12
III.B	ix	6.2	12
IV	x	Figures	
V	x	1	3
	x	2	4
	x	3	7
Standard		Tables	
1	General	1	6
1.1	1	2	8
1.2	1		
1.3	1		
2	References		
	2		
3	Definitions		
	2		

Foreword

This foreword is for information only and is not a part of ANSI/AWWA C621.*

I. Introduction.

I.A. *Background.* Internal joint pipe repair or sealing is a method for no-dig rehabilitation of leaky joints in water transmission mains. This method of joint repair can be used to correct leaking pipe joints, to strengthen weak joints, to seal leaks at cracks, or prevent infiltration or exfiltration. Joint repair consists of bridging the existing pipe joint with a rubber seal and a corrosion-resistant band allowing for limited movement of the pipe joint. This pipe rehabilitation method has a wide range of applications from circular pipe to square or box shapes and is available in a variety of widths up to 13 in. Custom seals can be designed for larger widths via the use of rubber sleeves. Because joint seals included in this standard are installed via man-entry, they are not suitable for circular pipes that are less than 24 in. in diameter. (Note: Some manufacturers/installers provide seals smaller than this depending on the access and pipeline configuration.) These joints are manufactured to withstand internal working pressures up to 300 psi though seals for higher pressures are also available.

I.B. *History.* The AWWA Standards Committee for Pipe Rehabilitation was formed in 1998 to develop standards on the topic. Development of this standard was authorized and initiated in 2009 in response to the water industry's request for a standard on internal joint pipe repair. This edition was approved by the AWWA Board of Directors on June 11, 2018.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF), and the Conference of State Health and Environmental Managers (COACHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.[†] Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

[†] Persons outside the United States should contact the appropriate authority having jurisdiction.

effects of products and drinking water additives from such products, state and local agencies may use various references, including:

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF*, NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*†, and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdiction. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C621 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to:

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues.

II.A. *Chlorine and Chloramine Degradation of Elastomers.* The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric materials, and the specifics of their application

* NSF International, 789 N. Dixboro Road, Ann Arbor, MI 48113.

† Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20001.

for each water system component should be considered to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

II.B. *Advisory Information on Material Application.* This standard defines the materials and methods for installation of flexible internal joint seals used in water transmission mains. Though some details may vary, all of the joint seals available on the market are applied in a similar fashion and have similar components as depicted in this standard. Internal pipe joint seal manufacturers should be contacted regarding the capabilities of the joint seals supplied and proper methods of installation.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following information should be provided by the purchaser.

1. Standard used—that is, ANSI/AWWA C621, Internal Pipe Joint Seal Assemblies for Water Service, of latest revision.

2. Joint type

3. Internal pipe diameter

4. Pipe material

5. Quantity

6. Rated pressure, including transient and test pressure

7. Details of federal, state, and local requirements regarding materials (Sec. 4.2.1.1)

8. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects, is required (Sec 4.2.1.2)

9. Whether certification of workers/workmanship is required (Sec 4.2.1.3)

10. Service conditions if other than potable water (Sec 4.2.2.2)

11. Water quality conditions, such as pH, affecting retainer band design (Sec 4.2.3)

12. Number of flexible or rigid seal assemblies required for the application (Sec 4.3.1.1)

13. If watertight and/or rigid seal is required (Sec 4.3.1)

14. Field records required (Sec. 4.4.1)

III.B. *Modification to Standard.* Any modification of the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. This is the first edition of this standard.

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603, write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098, or e-mail at standards@awwa.org.

Currently in preview, click buy full version



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA C621-18
(First Edition)

AWWA Standard

Internal Pipe Joint Seal Assemblies for Water Service

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes the selection and installation requirements for field-applied, mechanical internal pipe joint seal assemblies for water service. Internal joint sealing is a method of in situ pipe joint rehabilitation that is used to correct leaking pipe joints; to strengthen weak joints or localized wall pitting and other structural defects at joints; to seal leaks at cracks; to prevent exfiltration or infiltration, or used in concert with other non-joint specific methods of pipe rehabilitation (cement-mortar lining, cured-in-place pipe lining, etc.).

Sec. 1.2 Purpose

The purpose of this standard is to provide the minimum requirements for selection and installation of internal pipe joint seal assemblies, including materials, dimensions, tolerances, and testing/verification procedures.

Sec. 1.3 Application

This standard can be referenced in specifications for selecting or installing internal pipe joint seal assemblies for water piping. The stipulations of this standard apply when this document has been referenced and then only to field-applied internal joint and wall seal assemblies for drinking water piping.