

ANSI/AWWA **C653-20**  
(Revision of ANSI/AWWA C653-13)

AWWA Standard

# Disinfection of Water Treatment Plants

**Effective date: Sept. 1, 2020.**

First edition approved by Board of Directors Jan. 25, 1987.

13<sup>th</sup> edition approved June 11, 2020.

Approved by American National Standards Institute May 15, 2020.



American Water Works  
Association




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

**CAUTION NOTICE:** The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; (212) 642-4900; or emailing [info@ansi.org](mailto:info@ansi.org).

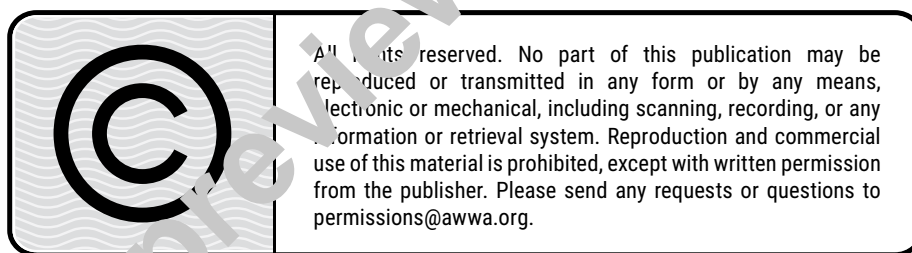

ISBN-13, print: 978-1-64717-021-7

eISBN-13, electronic: 978-1-61300-565-1

DOI: <http://dx.doi.org/10.12999/AWWA.C653.20>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2020 by American Water Works Association  
Printed in USA

## Committee Personnel

The AWWA Subcommittee on Disinfection of Water Treatment Plants, which developed revisions to this standard, had the following personnel at the time:

Gerald J.R. Rhoads, *Chair*

R.C. Lorenz, Westerville Water Plant, Westerville, Ohio

J. Nilson, Seattle Public Utilities, Seattle, Wash.

D. O'Connor, Philadelphia Water Dept., Philadelphia, Penn.

B. Reilley, Massachusetts Water Resources Authority (MWRA), Boston, Mass.

G.J.R. Rhoads, Metro Water District of Southern California, La Verne, Calif.

A. Waldron, Jacobs, Englewood, Colo.

M.L. Wentink, Nebraska DHHS Division of Public Health, North Platte, Neb.

The AWWA Standards Committee on Disinfection of Facilities, which reviewed and approved this standard, had the following personnel at the time of approval:

Betsy Reilley, *Chair*

Gerald J.R. Rhoads, *Vice Chair*

### *General Interest Members*

K.C. Choquette, Des Moines, Iowa

J.M. Henderson, West Linn, Ore.

E. Meek (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.

A.A. Rosenblatt, Gordon & Rosenblatt LLC, New York, N.Y.

S. Vidika, Dixon Engineering Inc., Medina, Ohio

M.A. Waer, Lake Forest, Calif.

J.S. Wailes, Park Hawk, Colo.

A. Waldron, Jacobs, Englewood, Colo.

M.L. Wentink, Nebraska DHHS Division of Public Health, North Platte, Neb.

### *Producer Members*

M.P. Parker, Statewide Aquastore Inc., East Syracuse, N.Y.

P.L. Smith, Smith LaSalle Inc., Western Springs, Ill.

T. Trocha, Miles & Miles of Texas, Buda, Tex.

*User Members*

K. Billedo, Los Angeles Dept. of Water and Power, Los Angeles, Calif.  
Z. Bukhari, New Jersey American Water Company, Camden, N.J.  
R.C. Lorenz, Westerville Water Plant, Westerville, Ohio  
M. MacConnell (*liaison, nonvoting*), Standards Council Liaison, Vancouver, B.C.  
P.M. Marchand, Bristol County Water Authority, Warren, R.I.  
J. Nilson, Seattle Public Utilities, Seattle, Wash.  
D. O'Connor, Philadelphia Water Dept., Philadelphia, Penn.  
B. Reilly, Massachusetts Water Resources Authority (MWRA), Boston, Mass.  
G.J.R. Rhoads, Metro Water District of Southern California, La Verne, Calif.  
E.D. Schwartz (*alternate*), New Jersey American Water Company, Plainsboro, N.J.

# Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>		1.2	Purpose ..... 1
I	Introduction..... vii	1.3	Application..... 2
I.A	Background..... vii	<b>2</b>	<b>References</b> ..... 2
I.B	History..... vii	<b>3</b>	<b>Definitions</b> ..... 3
II	Special Issues ..... vii	<b>4</b>	<b>Requirements</b>
II.A	Alternative Disinfection Procedures..... vii	4.1	Materials and Chemicals..... 4
III	Use of This Standard ..... viii	4.2	Units Requiring Disinfection..... 4
III.A	Purchaser Options and Alternatives ... viii	4.3	Forms of Chlorine for Disinfection ..... 5
III.B	Modification to Standard ..... ix	4.4	Plant Disinfection Procedures..... 6
IV	Major Revisions..... ix	<b>5</b>	<b>Verification</b>
V	Comments ..... ix	5.1	Bacteriological Sampling ..... 8
<b>Standard</b>		5.2	Record of Compliance..... 8
<b>1</b>	<b>General</b>	<b>6</b>	<b>Delivery</b> ..... 8
1.1	Scope..... 1		

This page intentionally blank.

Currently in preview, click buy full version

# Foreword

*This foreword is for information only and is not a part of ANSI/AWWA C653.*

## **I. Introduction.**

I.A. *Background.* This standard describes methods of disinfecting new treatment facilities before they are placed in service; existing treatment facilities before they are returned to service after construction, inspection, or other event causing potential contamination; and existing treatment facilities that, under normal operation, continue to demonstrate the presence of total coliform bacteria in the plant effluent. Because of the complexity and diversity of treatment plants, the formulation of firm rules for application of this standard is not practicable. Nevertheless, principles described in this standard do apply generally and must be followed to enable proper disinfection of treatment plant facilities. Several alternative disinfection procedures are provided for those parts of the treatment plant generally referred to as conveyance facilities (such as pipes) and storage facilities (such as storage tanks, clearwells, and so forth).

Disinfection is required for all portions of the facility that are either downstream from the filter influent, downstream from the first point of primary disinfectant application in the treatment process, or all portions of a facility if no primary disinfection is provided (for example, some groundwater systems) as described in Sec. 4.2. The section of the treatment facility handling raw water does not need to be disinfected but should be thoroughly cleaned as described in Sec. 4.1.

I.B. *History.* The first edition of ANSI/AWWA C653 was approved by the AWWA Board of Directors on Jan. 25, 1987. Subsequent editions were approved on Feb. 2, 1997; Jan. 15, 2003; and June 9, 2013. This edition was approved June 11, 2020.

## **II. Special Issues.**

II.A. *Alternative Disinfection Procedures.* The utility should decide which of the alternative disinfection procedures is most suitable for a given situation. Choice of the procedure used should include consideration of the availability of materials and equipment for the disinfection operation, the training of personnel to perform the disinfection, and safety considerations. For example, gas chlorination should be used only where properly designed and constructed equipment is available; makeshift

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

equipment is not acceptable when liquid chlorine gas cylinders are used. Spray equipment should be used inside tanks or enclosures only when thorough ventilation is assured or when appropriate protection for personnel is provided. If a procedure is selected that requires the disposal of highly chlorinated water, then thorough consideration should be given to the impact on the environment and local regulations. If there is any question that the discharge of chlorinated waste may cause damage to aquatic life, wildlife, human health, physical installations, or other downstream water uses of any type, then a reducing agent should be applied to water being disposed of to thoroughly neutralize the chlorine residual remaining in the water. Refer to ANSI/AWWA C655, Field Dechlorination for appropriate dechlorination requirements.

Disinfection of treatment plants requires high levels of disinfectant to be applied to ensure bacteria and other potential pathogens are inactivated. It should be noted that pH and temperature are two important factors affecting the disinfection process. Above pH 9, chlorine exists primarily in the form of hypochlorite, which is not as effective a disinfectant as hypochlorous acid, which is more prevalent at pH less than 9. Water temperature also affects the disinfection process; disinfection at low temperatures is not as effective as at high temperatures.

Disinfectants other than chlorine may be appropriate to use. While this standard describes only the use of liquid chlorine, sodium hypochlorite solutions, and calcium hypochlorite, the applicability of other disinfectants should be evaluated. Ozone and chemical cleaners have been used, and these warrant further investigation. Whichever disinfectant or method is selected, approval from the local regulatory agency may be required.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

**III.A. Purchaser Options and Alternatives.** The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C653, Disinfection of Water Treatment Plants, of latest revision.

Whether compliance with NSF\*/ANSI/CAN† 60, Drinking Water Treatment Chemicals—Health Effects, is required.

3. Details of federal, state, and local requirements (Sec. 4.1.1).

\* NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105

† Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

4. Form of chlorine to be used (Sec. 4.3).
5. Method of chlorination of piping (Sec. 4.4.1).
6. Precautions for disposal of chlorinated water (Sec. 4.4.3.6).
7. Bacteriological testing method to be used (Sec. 5.1).
8. Redisinfection, if required (Sec. 5.1).
9. Method of dechlorination, if required.

III.B. *Modification to Standard.* Any modification of the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** Major changes made to the standard in this revision include the following:

1. The scope was updated to include the use of disinfection on all portions of a facility if no primary disinfection is provided (Sec. I.A, Sec. 1.1, Sec. 1.2).
2. Definitions for potable water, reclaimed water, and wastewater were added (Sec. 3).
3. Sec. 4.3 *Forms of Chlorine for Disinfection* was updated to align with C652.

**V. Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603, write to the department at 6066 West Quincy Avenue, Denver, CO 80235-3098, or email at [standards@awwa.org](mailto:standards@awwa.org).

This page intentionally blank.

Currently in preview, click buy full version



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C653-20**  
(Revision of ANSI/AWWA C653-13)

**AWWA Standard**

---

# Disinfection of Water Treatment Plants

---

## SECTION 1: GENERAL

---

### **Sec. 1.1 Scope**

This standard describes chlorination materials, procedures, and requirements for disinfection of new treatment facilities and existing water treatment facilities temporarily taken out of service for cleaning, inspection, maintenance, painting, repair, or any other activity or event that might lead to contamination of water. Typically, this standard applies to treatment components, including filter basins, filter media, clearwells, pump suction wells, and associated piping and appurtenances located downstream from the filter influent, or from the first point of application of disinfectant in the treatment process, or all portions of a facility if no primary disinfection is provided. The disinfection method employed is surface contact with a high-strength chlorine solution for a specific time period. The absence of total coliform bacteria in addition to the use of proper disinfection practices is confirmation that the disinfection process has been accomplished in compliance with this standard.

### **Sec. 1.2 Purpose**

The purpose of this standard is to define the minimum requirements for the disinfection of water treatment plants, including facility preparation, application