

ANSI/AWWA **C901-20**  
(Revision of ANSI/AWWA C901-17)

AWWA Standard

**Polyethylene (PE)  
Pressure Pipe and  
Tubing,  $\frac{3}{4}$  In. (19 mm)  
Through 3 In. (76 mm),  
for Water Service**

**Effective date: Feb. 1, 2021.**

First edition approved by Board of Directors Jan. 28, 1978.

13<sup>th</sup> edition approved Oct. 26, 2020.

Approved by American National Standards Institute Sept. 1, 2020.



American Water Works  
Association




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

**CAUTION NOTICE:** The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or emailing [info@ansi.org](mailto:info@ansi.org).

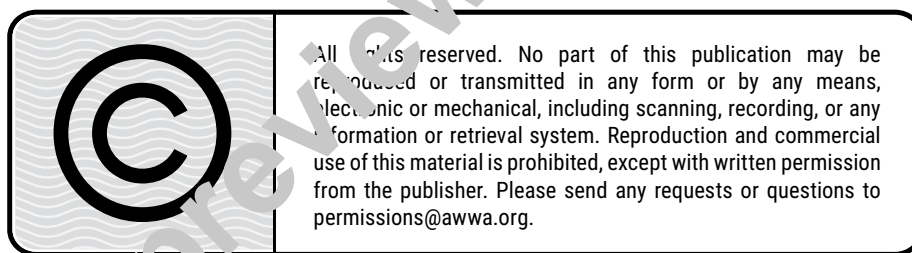

ISBN-13, print: 978-1-64717-051-0

ISBN-13, electronic: 978-1-61300-575-0

DOI: <http://dx.doi.org/10.12999/AWWA.C901.20>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2020 by American Water Works Association  
Printed in USA

## Committee Personnel

The AWWA Standards Committee on Polyolefin Pressure Pipe and Fittings, which reviewed and approved this standard, had the following personnel at the time of approval:

John F. Fishburne, *Chair*

Camille G. Rubeiz, *Secretary*

### *General Interest Members*

L. Aguiar, Hazen and Sawyer, Coral Gables, Fla.

E.A. Ambler, AM Trenchless, Sanford, Fla.

J.L. Beaver, Simpson Gumpertz Heger Inc., Waltham, Mass.

J.P. Castronovo, Blue Ridge, Ga.

A. Chastain-Howley (*liaison, nonvoting*), Standards Council Liaison, Black & Veatch, Arlington, Tex.

K.C. Choquette, Des Moines, Iowa

A.J. Ciechanowski, NSF International, Ann Arbor, Mich.

D.E. Duvall, Engineering Systems Inc., Aurora, Ill.

J.F. Fishburne, Freese & Nichols Inc., Charlotte, N.C.

D.L. McPherson (*alternate*), HDR, Charlotte, N.C.

P.J. Olson (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.

G. Scoby, Cross Bore Consultants, Los Angeles, Calif.

D.A. Stewart, Stewart HDPE Consulting, LLC, Lago Vista, Tex.

S.C. Williams, HDR, Atlanta, Ga.

S. Ziobro, FM Approvals, Pawtucket, R.I.

### *Producer Members*

S. Boros, Pipeline Plastics LLC, Geneva, Ill.

G. Garcia, IM Eagle, Los Angeles, Calif.

L.J. Gill, IPEX, Oakville, Ont.

D. Hesse, Reliance Worldwide Corp., Atlanta, Ga.

J. S. Johnston, Jr., McElroy Manufacturing, Inc., Tulsa, Okla.

D. Langston, WL Plastics Corp., Cedar City, Utah

L. MacNevin (*alternate*), Plastics Pipe Institute, Ashburn, Va.

C.G. Rubeiz, Plastics Pipe Institute, Fairfax, Va.

S.D. Sandstrum, ISCO Industries, The Woodlands, Tex.

H. Svetlik (*alternate*), Georg Fischer Central Plastics LLC, Dallas, Tex.

J. Wright, Georg Fischer Central Plastics LLC, Shawnee, Okla.

*User Members*

J. Allen, Arlington Water Department, Arlington, Tex.

M. Boyce, East Bay Municipal Utilities District, Oakland, Calif.

H. Link, Colorado Springs Utilities, Colorado Springs, Colo.

A. Marner, U.S. Bureau of Reclamation, Denver, Colo.

R. McKaskle, City of Tulsa – Engineering Services Dept., Tulsa, Okla.

N. Perez-Jacome, City of Miami Beach, Miami Beach, Fla.

M.A. Wirtz, City of Fort Wayne, Fort Wayne, Ind.

# Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>		4.2	Materials ..... 6
I	Introduction..... vii	4.3	Pipe and Tubing ..... 8
I.A	Background..... vii	4.4	Pressure Class ..... 11
I.B	History..... vii	<b>5</b>	<b>Verification</b>
I.C	Acceptance ..... vii	5.1	General ..... 12
II	Special Issues ..... ix	5.2	Tests for Qualification of Materials and Processes ..... 13
II.A	Considerations for Oxidative Resistance..... ix	5.3	Tests for Product Quality Control ... 13
II.B	Chlorine and Chloramine Degradation of Elastomers ..... ix	5.4	Action After Failure to Meet Requirements ..... 14
III	Use of This Standard ..... x	5.5	Quality-Control Records..... 14
III.A	Purchaser Options and Alternatives ..... x	5.6	Plant Inspection by Purchaser..... 14
III.B	Modification to Standard ..... x	<b>6</b>	<b>Delivery</b>
IV	Major Revisions..... xi	6.1	Marking ..... 15
V	Comments ..... xi	6.2	Shipping..... 16
		6.3	Affidavit of Compliance ..... 16
<b>Standard</b>		<b>Appendixes</b>	
<b>1</b>	<b>General</b>	A	Internal Surge Pressure and Corresponding Sudden Water Flow Velocity Change..... 17
1.1	Scope..... 1	B	Bibliography of Sources for Additional Information Regarding Permeation of Polyolefin Pipes..... 19
1.2	Purpose ..... 2	C	Bibliography of Additional Information Regarding Polyolefin Pipe and Tubing..... 21
1.3	Application..... 2		
<b>2</b>	<b>References</b> ..... 2		
<b>3</b>	<b>Definitions</b> ..... 4		
<b>4</b>	<b>Requirements</b>		
4.1	Permeation ..... 6		

SEC.	PAGE	SEC.	PAGE
<b>Figure</b>			
1	Bend-back test.....	11	
<b>Tables</b>			
1	ASTM D3350 Cell Classification and Property Values for Materials .....	9	
2	Elevated-Temperature Sustained- Pressure Test Requirements.....	9	
3	IPS PE Pipe—OD-Controlled: Diameter, SDR, and Wall Thickness.....	10	
4	CTS PE Tubing—OD-Controlled: Diameter, SDR, and Wall Thickness.....	10	
5	Minimum Short-Term Burst Pressure for Pipe and Tubing at 73°F (23°C).....	11	
6	PE Pipe and Tubing: Pressure Cons..	12	

---

# Foreword

*This foreword is for information only and is not a part of ANSI/AWWA C901.*

## **I. Introduction.**

I.A. *Background.* This standard describes polyethylene (PE) pressure pipe and tubing for use primarily as service lines in the construction of underground water distribution systems.

This standard describes standard dimension ratios (SDRs) for pipe and tubing made from PE material with standard PE code designation PE4710 in a pressure class of 250 psi (1,700 kPa) for water at 80°F (27°C) and lower temperatures. Maximum working pressure ratings are reduced for higher service temperatures; refer to AWWA Manual M55 for information about the use of PE tubes at higher service temperatures. Pipe ranging in nominal size from ¾ in. (19 mm) through 3 in. (76 mm) conforms to the outside-diameter (OD) dimensions of iron pipe size (IPS). Tubing ranging in size from ¾ in. (19 mm) through 2 in. (51 mm) conforms to the OD dimensions of copper tube size (CTS).

I.B. *History.* On Jan. 28, 1978, the first edition of ANSI/AWWA C901 was approved by the AWWA Board of Directors. On Aug. 9, 1982, a subcommittee of the AWWA Standards Committee on Thermoplastic Pressure Pipe was formed to review and revise the standard based on experience and advances in the state of the art since the adoption of the standard. To this end, AWWA conducted two surveys of its members to ascertain their experience with ANSI/AWWA C901 products. This information was incorporated into the second edition of ANSI/AWWA C901, approved on Jan. 24, 1988.

In June 1989, the Thermoplastic Pressure Pipe Committee was divided into two committees to accommodate both polyolefin and polyvinyl chloride (PVC) pipe. Thus were formed the Polyvinyl Chloride Pressure Pipe and Fittings Committee and the Polyolefin Pressure Pipe and Fittings Committee. Subsequent editions of C901 were approved June 27, 1996; June 16, 2002; June 8, 2008; and June 11, 2017. This edition was approved on October 26, 2020.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF<sup>†</sup>) to develop voluntary third-party consensus standards and a

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.<sup>‡</sup> Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF: NSF/ANSI/CAN<sup>§</sup> 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,\*\* and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI/CAN 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI/CAN 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA C901 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

Determine additives requirements, including applicable standards.

<sup>‡</sup> Persons outside the United States should contact the appropriate authority having jurisdiction.

<sup>§</sup> Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

\*\* Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20418.

2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.

3. Determine current information on product certification.

## II. Special Issues.

II.A *Considerations for Oxidative Resistance.* Consistent with the practice of other pipe and material standards, strength ratings in this standard are not reduced for potential in-service degradation mechanisms such as internal or external corrosion and oxidation.

ASTM\* F2263 assesses long-term internal oxidative stability of PE material in potable water applications based on accelerated testing and modeling. ASTM F2263 was updated in 2014 to reflect how testing is currently being performed. ASTM F2263 results are useful for projecting the relative performance of various PE pipe compounds in chlorinated water applications. ASTM F2263 is a test method and does not include performance criteria for PE tubes. ASTM D3350 was updated in 2014 to provide for the classification of PE resin performance under oxidative conditions. The materials requirements incorporating ASTM F2263 and ASTM D3350 have been added in Section 4.

For potable water applications, the standard specifies PE compounds with oxidative resistance classification CC3 and limits the pipe size (i.e., dimension ratio) to SDR9, which ensures adequate design life under the vast majority of disinfectant applications where chlorine and chloramine are used as secondary disinfectants and as shown in PPI TN-49. (NOTE: This standard does not include consideration of chlorine dioxide as a secondary disinfectant, which is estimated to be used in less than 1 percent of North American utilities. Seek additional guidance from the pipe supplier if chlorine dioxide is the planned disinfectant practice.) (See Jana Laboratories, *Usage and Effects of Chlorine Dioxide on PEX Plumbing and Water Distribution Systems in North America*, prepared for the Plastics Pipe Institute, July 2010, <http://plasticpipe.org/pdf/effects-of-chlorine-dioxide-on-pex.pdf>.)

II.B *Chlorine and Chloramine Degradation of Elastomers.* The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact

---

\* ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959.

surface area, elastomer cross section, environmental conditions as well as temperature. Careful selection of and specifications for elastomeric materials and the specifics of their application for each water system component should be considered to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered. Refer to AWWA Manual M55 for details.

**III.A. Purchaser Options and Alternatives.** The following items should be considered by the purchaser:

1. Standard used—that is, ANSI/AWWA C901, Polyethylene (PE), Pressure Pipe and Tubing,  $\frac{3}{4}$  In. (19 mm) Through 3 In. (76 mm), for Water Service, of latest revision.
2. Whether compliance with NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects, is required.
3. Details of federal, state, and local requirements (Sec. 4.2).
4. Pipe
  - a. Standard code designation of the PE material.
  - b. Nominal size, pressure class, dimension ratio and diameter basis (SDR), form (straight or coiled), length of individual pieces, and total linear feet (linear meters) for each different item to be provided.
5. Tubing
  - a. Standard code designation of the PE material.
  - b. Nominal size, pressure class, dimension ratio, form (straight or coiled), length of individual pieces, and total linear feet (linear meters) for each different item to be provided.
6. The following requirements should be specified:
  - a. Special quality-control tests (Section 5).
  - b. Plant inspection (Sec. 5.6).
  - c. Special marking (Sec. 6.1.3).
  - d. Special preparation for shipment (Sec. 6.2).
  - e. Affidavit of compliance (Sec. 6.3).

**III.B. Modification to Standard.** Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** Major changes made to the standard in this revision include the following:

1. Oxidative Resistance classification has been limited to CC3 (Sec. II.A, Sec. 4.2.1.2, Table 1, and Sec. 6.1.3).
2. The previous section on Special Sizes has been removed. C901 is limited to SDR 9.
3. The marking requirements have been updated (Sec. 6.1.3).
4. The AWWA Standards Council's consistent language on Chlorine and Chloramine Degradation of Elastomers has been included in the foreword (Sec. II.B.)

**V. Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711; FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at [standards@awwa.org](mailto:standards@awwa.org).



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C901-20**  
(Revision of ANSI/AWWA C901-17)

**AWWA Standard**

---

# Polyethylene (PE) Pressure Pipe and Tubing, $\frac{3}{4}$ In. (19 mm) Through 3 In. (76 mm), for Water Service

---

## SECTION 1: GENERAL

---

### Sec. 1.1 Scope

This standard describes polyethylene (PE) pressure pipe and tubing made from material having standard PE code designation PE4710\* and intended for use in potable water, reclaimed water, and wastewater service. PE pipe ranges in nominal size from  $\frac{3}{4}$  in. (19 mm)<sup>†</sup> through 3 in. (76 mm) and conforms to the outside-diameter (OD) dimensions of iron pipe size (IPS). PE tubing ranges in size from  $\frac{3}{4}$  in. (19 mm) through 2 in. (51 mm) and conforms to the OD dimensions of copper tube size (CTS). Included in this standard are criteria for classifying PE plastic pipe materials, a system of nomenclature for PE plastic pipe, and requirements and test methods for materials, pipe, and tubing. Methods of marking are also given.

---

\* Earlier editions of ANSI/AWWA C901 included other PE material designations. For removed designations, refer to previous editions of ANSI/AWWA C901, ASTM D3350, PPI (Plastics Pipe Institute) TR-3, and PPI TR-4.

<sup>†</sup> Metric conversions given in this standard are direct conversions of US customary units and are not those specified in International Organization for Standardization (ISO) standards.