



BSI Standards Publication

**Intelligent transport systems —  
Cooperative systems — Data  
exchange specification for  
in-vehicle presentation of  
external road and traffic  
related data  
(ISO/TS 17425:2016)**

**National foreword**

This Published Document is the UK implementation of CEN ISO/TS 17425:2016.

The UK participation in its preparation was entrusted to Technical Committee EPL/278, Intelligent transport systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.  
Published by BSI Standards Limited 2016

ISBN 978 0 580 90821 7  
ICS 03.220.01; 35.240.60

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 3 July 2016.

**Amendments/corrigenda issued since publication**

Date	Text affected
------	---------------

---

TECHNICAL SPECIFICATION  
 SPÉCIFICATION TECHNIQUE  
 TECHNISCHE SPEZIFIKATION

**CEN ISO/TS 17425**

June 2016

ICS 35.240.60; 03.220.01

English Version

**Intelligent transport systems - Cooperative systems - Data  
 exchange specification for in-vehicle presentation of  
 external road and traffic related data (ISO/TS  
 17425:2016)**

Systèmes intelligents de transport - Systèmes  
 coopératifs - Spécifications d'échange des données  
 pour la présentation dans le véhicule de la route  
 externe et des données relatives au trafic (ISO/TS  
 17425:2016)

Intelligente Transportsysteme - Kooperative Systeme -  
 Datenaustausch Spezifikation für die fahrzeuginterne  
 Darstellung von externen Straßen- und  
 verkehrsrelevanten Daten (ISO/TS 17425:2016)

This Technical Specification (CEN/TS) was approved by CEN on 4 April 2016 for provisional application.

The period of validity of this CEN/TS is limited initially to three years. After two years the members of CEN will be requested to submit their comments, particularly on the question whether the CEN/TS can be converted into a European Standard.

CEN members are required to announce the existence of this CEN/TS in the same way as for an EN and to make the CEN/TS available promptly at national level in an appropriate form. It is permissible to keep conflicting national standards in force (in parallel to the CEN/TS) until the final decision about the possible conversion of the CEN/TS into an EN is reached.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
 COMITÉ EUROPÉEN DE NORMALISATION  
 EUROPÄISCHES KOMITEE FÜR NORMUNG

**CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels**

<b>Contents</b>	<b>Page</b>
<b>European foreword.....</b>	<b>3</b>

Currently in preview, click buy full version

## European foreword

This document (CEN ISO/TS 17425:2016) has been prepared by Technical Committee ISO/TC 204 “Intelligent transport systems” in collaboration with Technical Committee CEN/TC 278 “Intelligent transport systems” the secretariat of which is held by NEN.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to announce this Technical Specification: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

### Endorsement notice

The text of ISO/TS 17425:2016 has been approved by CEN as CEN ISO/TS 17425:2016 without any modification.

# Contents

	Page
<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>2</b>
<b>3 Terms and definitions</b> .....	<b>7</b>
<b>4 Symbols and abbreviated terms</b> .....	<b>4</b>
<b>5 Service definition and main concepts</b> .....	<b>4</b>
5.1 General.....	4
5.2 Service definition.....	6
5.2.1 Definition.....	6
5.2.2 Message categories.....	6
5.2.3 Core services.....	6
5.2.4 Additional services.....	7
5.3 Fundamental parameters.....	7
5.3.1 Spatial relevance.....	7
5.3.2 Temporal validity.....	8
5.3.3 Other parameters.....	9
5.4 Example of system implementation.....	9
5.4.1 General description.....	9
5.4.2 Interface identification.....	10
<b>6 Roles and responsibilities</b> .....	<b>10</b>
6.1 Scenarios for In-Vehicle Signage.....	10
6.2 System operation roles in scenario I–V.....	12
6.3 Possible actors in In-Vehicle Signage.....	13
<b>7 Requirements and recommendations</b> .....	<b>14</b>
7.1 General.....	14
7.2 General requirements.....	14
7.3 Message content.....	14
7.4 Message management requirements.....	15
7.4.1 IVS sending ITS station requirements.....	15
7.4.2 Roadside ITS station.....	16
7.4.3 IVS receiving ITS station requirements.....	16
7.4.4 Transmission of IVS information to the HMI control unit.....	17
7.5 Recommendations for information processing in relation with the presentation to vehicle drivers.....	18
<b>Annex A (informative) Profile 1</b> .....	<b>20</b>
<b>Annex B (informative) Profile 2</b> .....	<b>86</b>
<b>Annex C (informative) Elements about static road signing</b> .....	<b>90</b>
<b>Annex D (informative) Different technologies and layouts used in VMS</b> .....	<b>92</b>
<b>Annex E (informative) Topology of the relevance zone of the different road signs</b> .....	<b>95</b>
<b>Annex F (informative) Elements of data modelling using UML</b> .....	<b>100</b>
<b>Bibliography</b> .....	<b>103</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#).


The committee responsible for this document is ISO/TC 204, *Intelligent transport systems*.

## Introduction

Traditional fixed road signs are positioned on road verges to inform drivers about the applicable regulations, or to warn them about dangers or to provide them with other general information – this can be considered as roadside signage information. Beyond this fixed signage, the newer technologies have now allowed for some time for more accurate dynamic presentation of roadside signage information depending on the actual road and environmental conditions using variable or dynamic message signs. With the advent of Cooperative Intelligent Transport Systems (C-ITS) it is possible to provide more focused and timely guidance to vehicle controllers and drivers by supporting continuous presentation of the content of roadside signage information in the vehicle along the impacted road section rather than only during the short moments it takes for a vehicle to pass traditional road signs. Direct in-vehicle presentation of roadside signage information, called In-Vehicle Signage, facilitates the potential provision of information to specific classes or characteristics of vehicles, and for potentially more granular definition of affected road sections than stationary-position traditional fixed plate signs and use of variable/dynamic road signs. It does not deal with contextual speeds which are covered by ISO/TS 17426.

Delivering the In-Vehicle Signage service to road users can improve road safety, support traffic management, and reduce greenhouse gas emissions. It does not preclude other usage of the delivered information but such services are not in the scope of this Technical Specification.

All ITS services follow the same abstract process structure consisting of a sequence of detection (of an event) including pre-processing of the detected content, execution of the service algorithm (processing of detected content), and presentation or utilization of the service result. [Figure 1](#) (extracted from ISO/TS 17427) summarizes and details this process structure.

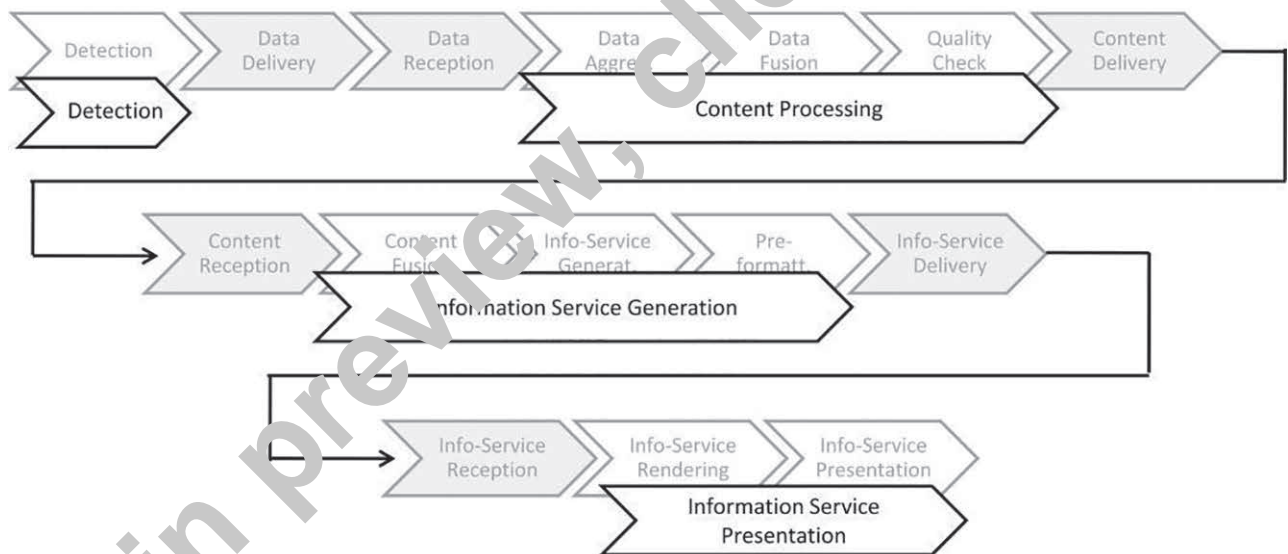

**Figure 1 — General description of process for In-Vehicle Signage (from ISO/TS 17427:2014, Annex A)**

Based on this abstract and general description of process steps in an ITS service, a large number of possible scenarios can be derived. This is true for In-Vehicle Signage. Every step in the process chain can be executed by different actors or stakeholders. Additionally, the execution of a process step for different spatial areas may be delivered by different actors. Each combination of different actors for different process steps can be used to identify distinct scenarios.

Assuming that there are two main stakeholder groups in C-ITS, the Infrastructure stakeholder and the Vehicle stakeholder, multiple combinations, and therefore multiple scenarios, are possible as every step might be delivered by either stakeholder group (see [Figure 2](#)) or shared between both stakeholder groups (see [Figure 3](#)).

	CONTENT	SERVICE	PRESENTATION		CONTENT	SERVICE	PRESENTATION
1	Vehicle	Vehicle	Vehicle	5	Infrastructure	Vehicle	Vehicle
2	Vehicle	Vehicle	Infrastructure	6	Infrastructure	Vehicle	Infrastructure
3	Vehicle	Infrastructure	Vehicle	7	Infrastructure	Infrastructure	Vehicle
4	Vehicle	Infrastructure	Infrastructure	8	Infrastructure	Infrastructure	Infrastructure

**Figure 2 — Possible scenarios — Simple combinations**

	CONTENT	SERVICE	PRESENTATION		CONTENT	SERVICE	PRESENTATION
9	Vehicle	Vehicle	Vehicle + Infrastructure	19	Vehicle + Infrastructure	Vehicle	Vehicle
10	Vehicle	Infrastructure	Vehicle + Infrastructure	20	Vehicle + Infrastructure	Vehicle	Infrastructure
11	Vehicle	Vehicle + Infrastructure	Vehicle + Infrastructure	21	Vehicle + Infrastructure	Vehicle	Vehicle + Infrastructure
12	Vehicle	Vehicle + Infrastructure	Vehicle	22	Vehicle + Infrastructure	Infrastructure	Vehicle
13	Vehicle	Vehicle + Infrastructure	Infrastructure	23	Vehicle + Infrastructure	Infrastructure	Infrastructure
14	Infrastructure	Vehicle	Vehicle + Infrastructure	24	Vehicle + Infrastructure	Infrastructure	Vehicle + Infrastructure
15	Infrastructure	Infrastructure	Vehicle + Infrastructure	25	Vehicle + Infrastructure	Vehicle + Infrastructure	Vehicle
16	Infrastructure	Vehicle + Infrastructure	Vehicle + Infrastructure	26	Vehicle + Infrastructure	Vehicle + Infrastructure	Infrastructure
17	Infrastructure	Vehicle + Infrastructure	Vehicle	27	Vehicle + Infrastructure	Vehicle + Infrastructure	Vehicle + Infrastructure
18	Infrastructure	Vehicle + Infrastructure	Infrastructure				

**Figure 3 — Possible scenarios — Complex combinations**

Every scenario is one specific combination of stakeholders executing process steps. This Technical Specification addresses the scenarios where detection, content pre-processing, and the information service generation (see [Figure 1](#)) are delivered under the responsibility of the infrastructure stakeholder group (scenario 7 as seen in [Figure 2](#)). In scenario 7, the information service presentation takes place in the vehicle. Scenario 7 is considered in detail in this Technical Specification.

The defined C-ITS applications rely on the functionality and procedures defined within the Communications Architecture and by the reference ITS station architecture (as defined in ISO 21217 and other International Standards or Technical Specifications from the C-ITS standard set).

Annex A and Annex B contain profiles that define an instantiation for the IVS service. Annex A and Annex B contain conditional mandatory requirements. There is no need to comply with these requirements to claim compliance with this Technical Specification.

Annex A contains a profile that is communication technology agnostic. Annex B contains a profile that is focused on ITS-G5. For details on the referenced standards, see the introduction of the corresponding Annex.

These profiles are expected to be implemented and validated in European initiatives. Based on the results of these initiatives, it is intended to specify one interoperable solution in a future version of this Technical Specification.

Currently in preview, click buy full version

# Intelligent transport systems — Cooperative systems — Data exchange specification for in-vehicle presentation of external road and traffic related data

## 1 Scope

This Technical Specification specifies the In-Vehicle Signage service and application that delivers In-Vehicle Signage information to ITS stations (vehicle ITS stations or personal ITS stations devices) concerning road and traffic conditions, qualified by road authorities/operators, in a consistent way with road authority's/operator's requirements, in the manner that is coherent with the information that would be displayed on a road sign or variable message sign (VMS).

**NOTE** A Variable Message Sign is also named dynamic message sign. Both terms are considered as synonyms and can be used interchangeably. In the text below, only variable message sign and its abbreviated term VMS are used.

This Technical Specification defines the following:

- the In-Vehicle Signage service and the In-Vehicle Signage application that instantiates this ITS service;
- the requirements to be fulfilled by the In-Vehicle Signage service;
- the requirements for using functions provided by the ITS station facilities layer supporting the use of the In-Vehicle Signage service;
- the ITS-S application processes in the different ITS station, that instantiate the In-Vehicle Signage ITS service.

This Technical Specification also specifies: the sets of communication requirements and objectives (profiles) using the methods defined in ISO/TS 17423 to select the level of performance (best effort or real-time, etc.), confidence and security (authentication, encryption, etc.) for each communication flow between ITS stations in the scope of the In-Vehicle Signage service.

This Technical Specification defines the selection of relevant functions and procedures provided by the ITS station facilities layer (ISO/TS 17429) and defines the message structure, content, syntax, atomic elements to be used by the In-Vehicle Signage application.

**NOTE** This application is colloquially called "In-Vehicle Signage".

The In-Vehicle Signage service includes the on-board information management. This management ensures contextual coherence of the end-user ITS service (e.g. vehicle characteristics, message priority, etc. avoiding amongst others things the presentation of conflicting information to end-users).

The production of information supporting the In-Vehicle Signage application, its qualification, and its relevance are out of the scope of this Technical Specification.

This Technical Specification does not specify the design of in-vehicle Human Machine Interfaces (HMI), but it does specify requirements that such interfaces shall be capable of supporting in order to permit the correct dissemination and use of information provided by the In-Vehicle Signage service.