




**CSA  
Group**

**B621-14**

**Selection and use of highway tanks,  
TC portable tanks, and other large  
containers for the transportation of  
dangerous goods, Classes 3, 4, 5,  
6.1, 8, and 9**

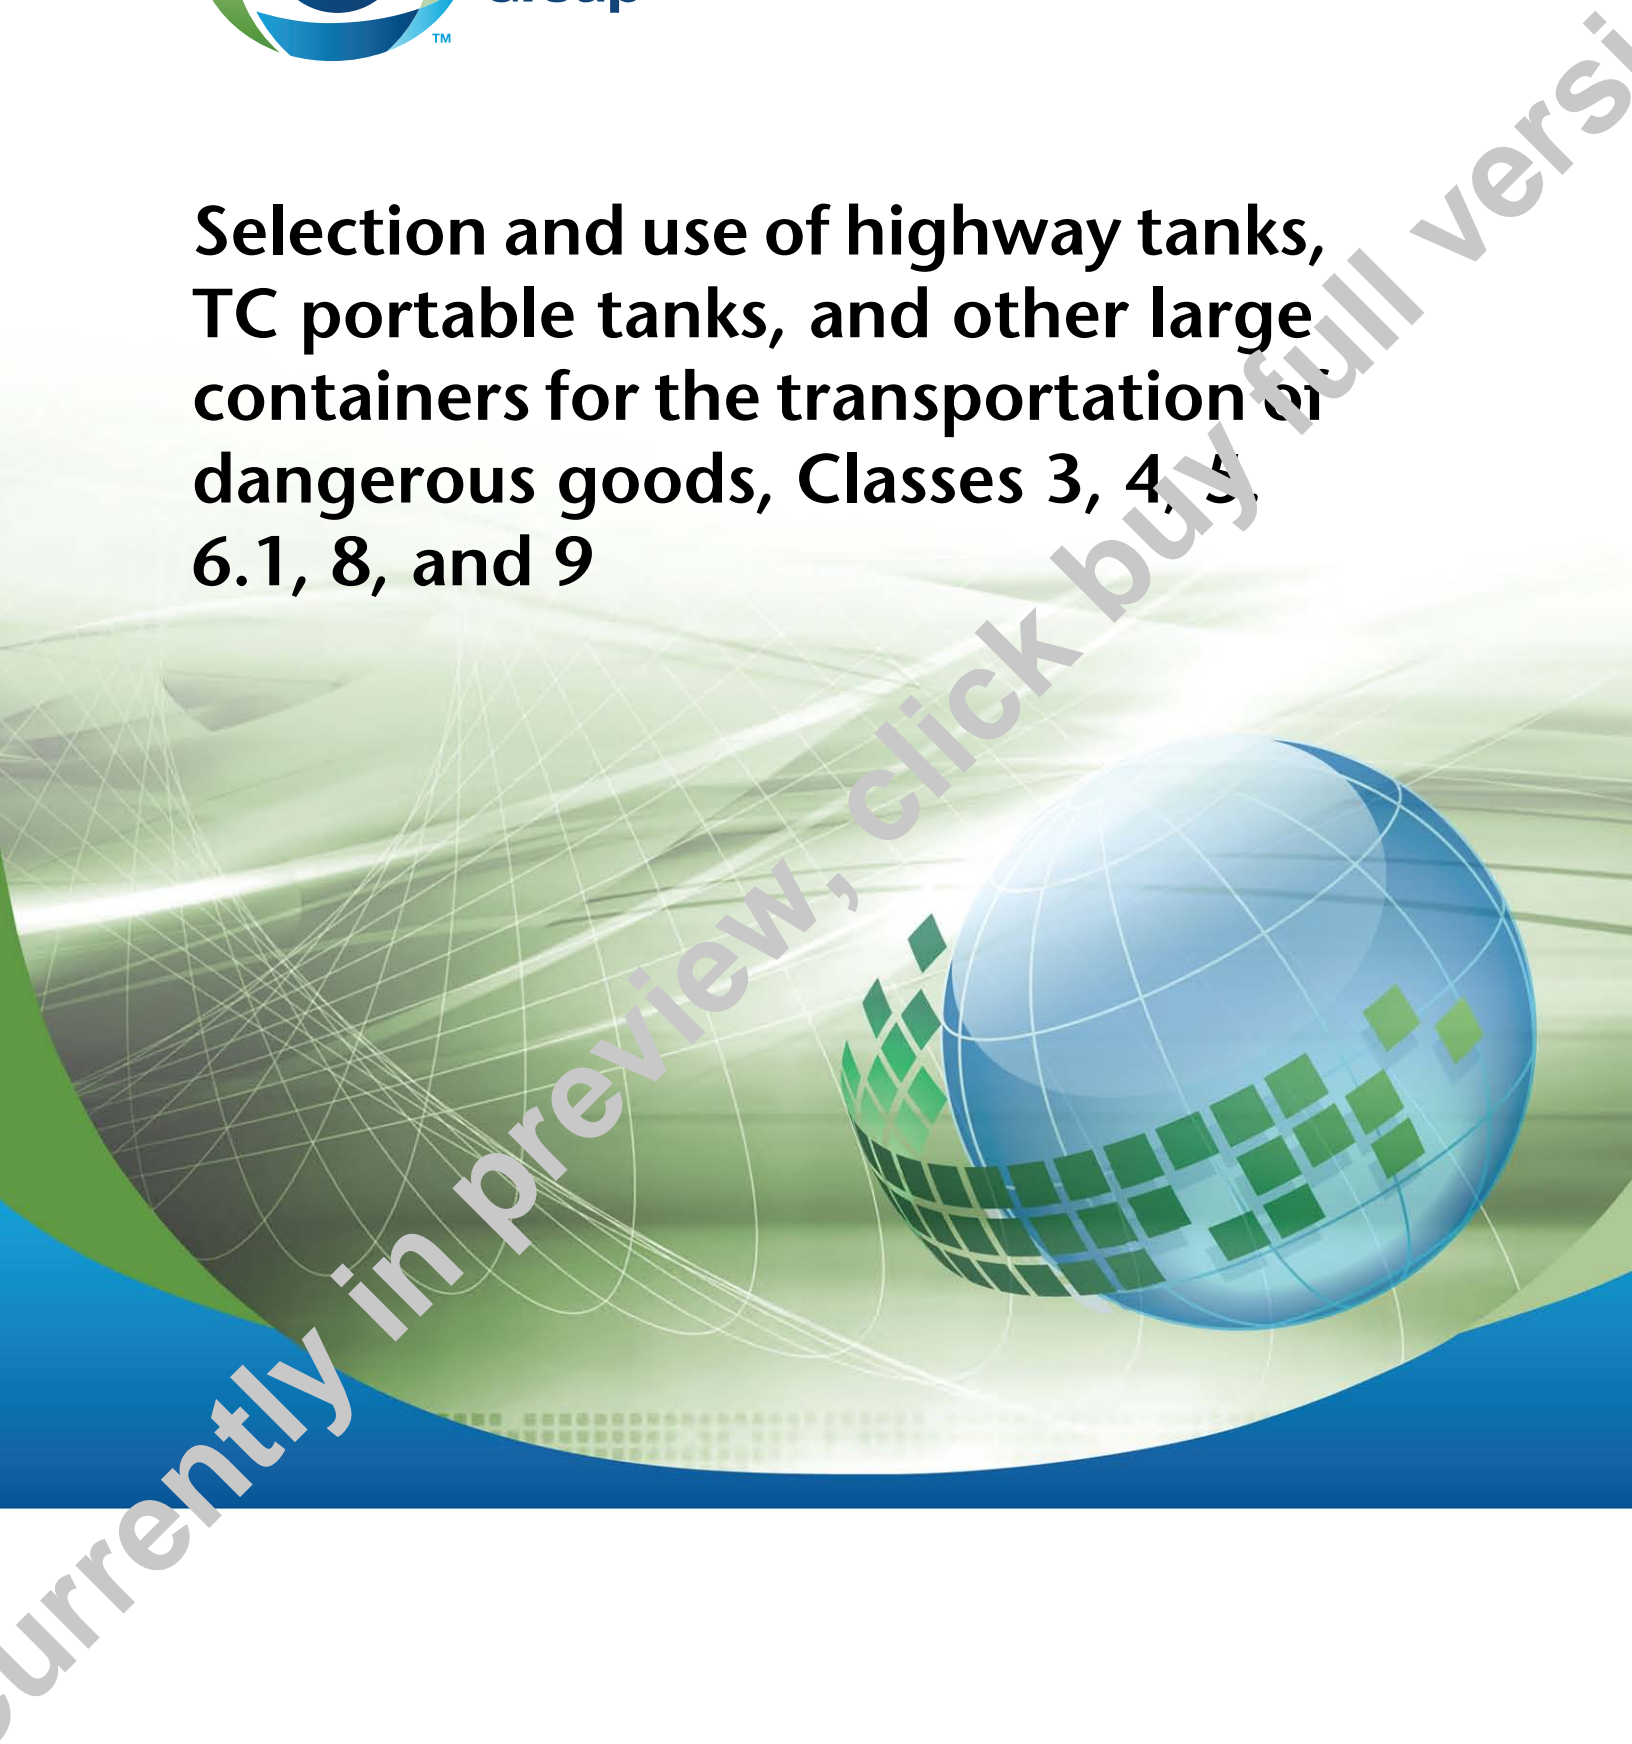

# Legal Notice for Standards

Canadian Standards Association (operating as “CSA Group”) develops standards through a consensus standards development process approved by the Standards Council of Canada. This process brings together volunteers representing varied viewpoints and interests to achieve consensus and develop a standard. Although CSA Group administers the process and establishes rules to promote fairness in achieving consensus, it does not independently test, evaluate, or verify the content of standards.

## Disclaimer and exclusion of liability

This document is provided without any representations, warranties, or conditions of any kind, express or implied, including, without limitation, implied warranties or conditions concerning this document’s fitness for a particular purpose or use, its merchantability, or its non-infringement of any third party’s intellectual property rights. CSA Group does not warrant the accuracy, completeness, or currency of any of the information published in this document. CSA Group makes no representations or warranties regarding this document’s compliance with any applicable statute, rule, or regulation.

IN NO EVENT SHALL CSA GROUP, ITS VOLUNTEERS, MEMBERS, SUBSIDIARIES, OR AFFILIATED COMPANIES, OR THEIR EMPLOYEES, DIRECTORS, OR OFFICERS, BE LIABLE FOR ANY DIRECT, INDIRECT, OR INCIDENTAL DAMAGES, INJURY, LOSS, COSTS, OR EXPENSES, HOWSOEVER CAUSED, INCLUDING BUT NOT LIMITED TO SPECIAL OR CONSEQUENTIAL DAMAGES, LOST REVENUE, BUSINESS INTERRUPTION, LOST OR DAMAGED DATA, OR ANY OTHER COMMERCIAL OR ECONOMIC LOSS, WHETHER BASED IN CONTRACT, TORT (INCLUDING NEGLIGENCE), OR ANY OTHER THEORY OF LIABILITY, ARISING OUT OF OR RESULTING FROM ACCESS TO OR POSSESSION OR USE OF THIS DOCUMENT, EVEN IF CSA GROUP HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, INJURY, LOSS, COSTS, OR EXPENSES.

In publishing and making this document available, CSA Group is not undertaking to render professional or other services for or on behalf of any person or entity or to perform any duty owed by any person or entity to another person or entity. The information in this document is directed to those who have the appropriate degree of experience to use and apply its content, and CSA Group accepts no responsibility whatsoever arising in any way from any and all use of or reliance on the information contained in this document.

CSA Group is a private not-for-profit company that publishes voluntary standards and related documents. CSA Group has no power, nor does it undertake, to enforce compliance with the contents of the standards or other documents it publishes.

## Intellectual property rights and ownership

As between CSA Group and the users of this document (whether it be in printed or electronic form), CSA Group is the owner, or the authorized licensee, of all works contained herein that are protected by copyright, all trade-marks (except as otherwise noted to the contrary), and all inventions and trade secrets that may be contained in this document, whether or not such inventions and trade secrets are protected by patents and applications for patents. Without limitation, unauthorized use, modification, copying, or disclosure of this document may violate laws that protect CSA Group’s and/or others’ intellectual property and may give rise to a right in CSA Group and/or others to seek legal redress for such use, modification, copying, or disclosure. To the extent permitted by licence or by law, CSA Group reserves all intellectual property rights in this document.

## Patent rights

Attention is drawn to the possibility that some of the elements of this standard may be the subject of patent rights. CSA Group shall not be held responsible for identifying any or all such patent rights. Users of this standard are expressly advised that determination of the validity of any such patent rights is entirely their own responsibility.

## Authorized use of this document

This document is being provided by CSA Group for informational and non-commercial use only. The user of this document is authorized to do only the following:

If this document is in electronic form:

- load this document onto a computer for the sole purpose of reviewing it;
- search and browse this document; and
- print this document if it is in PDF format.

Limited copies of this document in print or paper form may be distributed only to persons who are authorized by CSA Group to have such copies, and only if this Legal Notice appears on each such copy.

In addition, users may not and may not permit others to

- alter this document in any way or remove this Legal Notice from the attached standard;
- sell this document without authorization from CSA Group; or
- make an electronic copy of this document.

If you do not agree with any of the terms and conditions contained in this Legal Notice, you may not load or use this document or make any copies of the contents hereof, and if you do make such copies, you are required to destroy them immediately. Use of this document constitutes your acceptance of the terms and conditions of this Legal Notice.



# **Update No. 1**

## **B621-14**

### **July 2018**

**Note:** For information about the **Standards Update Service**, go to **shop.csa.ca** or e-mail **techsupport@csagroup.org**.

**Title:** *Selection and use of highway tanks, TCportable tanks, and other large containers for the transportation of dangerous goods, Classes 3, 4, 5, 6.1, 8, and 9* — originally published January 2014

The following revisions have been formally approved and are marked by the symbol delta (Δ) in the margin on the attached replacement pages:

<b>Revised</b>	Clauses 7.1 and 8.4
<b>New</b>	None
<b>Deleted</b>	None

- Update your copy by inserting these revised pages.
- Keep the pages you remove for reference.

- (c) it is free of any visible defect that could affect its integrity during loading, unloading, or transportation;
- (d) if it is a tank, it has a MAWP equal to or greater than that specified in Clause 4.4;
- (e) where a fire hazard exists, precautions have been taken to prevent a difference in electrical potential between conductive surfaces and to ensure safe dissipation of static electricity through bonding or grounding, or both, as appropriate;
- Δ (f) all flexible hoses and their couplings have been inspected visually to ensure mechanical fitness, integrity, and compatibility with lading. A hose assembly shall not be used to load or unload dangerous goods if it is determined to have any of the conditions identified in Clause 7.2.10.4 of CSA B620-14 or if the markings are not in accordance with Clause 7.2.10.6 or 7.2.10.8 of CSA B620-14. Despite the requirement of Clause 7.2.10.4(a) of CSA B620-14, a hose may continue to be used if the reinforcement is exposed as long as there is no evidence of wear, deterioration or other damage in the exposed reinforcement;
- (g) prior to transport, the gauge glass valves on TC 44 tanks shall be closed and remain closed during transport.
- (h) while parked for loading or unloading,
  - (i) a fail-safe brake interlock system is used that will apply the parking brake while the loading and unloading hoses are connected; or
  - (ii) chock blocks are used at the wheels.
- Δ (i) as of 1 Jan 2015, highway tanks and vehicles transporting portable tanks containing Dangerous Goods of primary Class 3, or subsidiary Class 3, shall be equipped with one or more dry chemical fire extinguishers accessible from the ground, with a combined total effective rating of not less than 40BC. Each fire extinguisher shall be recharged immediately after each use and shall be inspected and marked annually in accordance with NFPA 10; and
- (j) as of 1 Jan 2016, diesel engines on highway tanks and portable tanks containing Dangerous Goods of primary Class 3, or subsidiary Class 3, and being used during loading or off loading shall be equipped with an automatic engine air intake shut off device that will prevent engine runaway in case of exposure to flammable vapours. The device shall activate automatically if engine runaway is detected and remain activated until manually reset.

## 7.2 Pre-loading requirements

In addition to the requirements in Clause 7.1, a means of containment shall not be loaded with dangerous goods unless the following conditions are fulfilled:

- (a) it has been inspected, tested, retested, and is marked as required for its specification (see Clause 5.4);
- (b) if it is a tank, and a component such as piping, a valve, or a fitting has been restored or replaced since the last time the tank was loaded or unloaded, that component has been tested for leaks at 80% of MAWP;
- (c) it does not contain any residue or foreign materials that could react with the intended lading or otherwise create a hazard;
- (d) those parts that contact the intended lading will not react with the lading or cause the lading to decompose and thereby create a hazard; and
- (e) if the mixture of two or more materials would result in a direct or indirect hazard (such as an explosion, fire, excessive increase in pressure or heat, or the release of toxic vapours), precautions shall be taken to ensure that a highway tank vehicle is not loaded with those materials unless the materials are separated by a double bulkhead.

## 7.3 Loading requirements

During loading of a means of containment,

- (a) the operator responsible for the transfer shall have been trained in product hazards and emergency procedures, and shall remain alert, within easy access of the flow shutdown control, and to the extent possible, with the hose and tank in clear view except for brief periods to operate controls or to check the receiving container.
- (b) The loading limits for the means of containment shall not be exceeded, including the rate of filling, the gross vehicle weight, the maximum product load, and the MAWP and vacuum limits.

- (c) The quantity of dangerous goods to be transferred shall be controlled.
- (d) If the means of containment is a tank, the outage left in the tank shall
  - (i) not be less than 2% of its volumetric capacity;
  - (ii) be sufficient to prevent the tank from becoming liquid-full should the temperature of the contents rise to 55 °C (131°F); and
  - (iii) if the tank is to be placed, stored, or parked within an enclosed space, be sufficient to prevent venting should the temperature of the contents rise to 55 °C (131°F).

#### 7.4 Post-loading requirements

The following requirements shall apply:

- (a) Immediately after the means of containment has been loaded
  - (i) all hatches, valves up to and including the outermost valve, and other openings in the means of containment shall be closed and secured; and
  - (ii) the exterior surfaces shall be clean and free of residue or spills of dangerous goods.
- (b) The closing and securing of valves and openings in Item (a) (i) shall not interfere with the normal functioning of any safety relief devices.
- (c) Prior to transport, the means of containment shall be secured to the transport vehicle in a manner that will endure the normal conditions of transportation.

#### 7.5 Pre-unloading requirements

In addition to the requirements in Clause 7.1, prior to unloading a means of containment, the following conditions shall be fulfilled:

- (a) unloading connections shall be inspected to ensure that the loading will be discharged into the proper receiving line;
- (b) precautions shall be taken to isolate from each other substances that can react violently together, if such substances are to be unloaded simultaneously at the same location;
- (c) the space available in the receiving means of containment shall be verified to ensure that it is sufficient to accommodate the quantity of goods to be unloaded; and
- (d) if the periodic inspection or test interval has expired since the tank was last loaded, the tank may be transported to its unloading destination and unloaded.

#### 7.6 Unloading requirements

During the unloading of a means of containment,

- (a) The operator responsible for the transfer shall have been trained in product hazards and emergency procedures, and shall remain alert, within easy access of the tank flow shutdown control, and to the extent possible, with the hose and tank in clear view except for brief periods to operate controls or to check the receiving container.
- (b) When the easy access and clear view referred to in Item (a) is not possible, the operator shall remain within easy access of another means of shutting off the flow except to check the supply connection, the hose, and the receiving tank at least once every five minutes for operations that last more than five minutes.
- (c) The loading and unloading limits for the delivering and receiving means of containment shall not be exceeded, including the rate of filling, the gross vehicle weight, the maximum product load, and the MAWP and vacuum limits.
- (d) The quantity of dangerous goods unloaded shall be controlled.

#### 7.7 Post unloading requirements

The following requirements shall apply:

- (a) Immediately after the means of containment has been unloaded
  - (i) all hatches, valves up to and including the outermost valve, and other openings in the means of containment shall be closed and secured; and
  - (ii) the exterior surfaces shall be clean and free of residue or spills of dangerous goods.

- (b) The closing and securing of valves and openings in Item (a) (i) shall not interfere with the normal functioning of any safety relief devices.

The requirements in Item (a) shall not apply if the means of containment is cleaned and purged immediately after unloading.

## 8 Tank selection requirements for dangerous goods of Classes 3, 4, 5, 6.1, 8, and 9

### 8.1 Classification, prohibition, and exemption under the TDG Act and Regulations

Clause 8 provides tank selection requirements for the handling, offering for transport, and transportation of dangerous goods of Classes 3, 4, 5, 6.1, 8, and 9 that are neither prohibited from transportation nor exempted by the TDG Regulations.

#### Notes:

- (1) Dangerous goods are classified in Part 2 of the TDG Regulations. The appropriate shipping name and the corresponding particulars (description, UN number, class, division, and packing group, as applicable) are assigned by Schedule 1 of the TDG Regulations.
- (2) Certain dangerous goods are exempted by the TDG Regulations, and others are prohibited from transport by Schedule 3 of the TDG Regulations.

### 8.2 General tank selection requirements

Dangerous goods shall be transported in

- (a) a means of containment that is selected and used in accordance with Clauses 4, 7, 8, and either 5 or 6 of this Standard; or
- (b) TC 106A or TC 110A multi-unit tank car tanks (ton containers) or their CTC or DOT equivalents, if the tanks are selected, used, maintained, and periodically inspected and tested as prescribed in CAN/CGSB-43.147.

### 8.3 Requirements for specific dangerous goods

The Specific Requirements in Clause 8.4, listed in column 6 of Tables 4 and 5, shall apply to specific dangerous goods where

- (a) the UN number in column 1 and the shipping name and description in column 2 match those of the dangerous goods; or
- (b) if the shipping name and description are not known or not included in either Tables 4 or 5, the general description in bold letters in column 2, the primary classification in column 3, the subsidiary classification in column 4, and the packing group in column 5 match those of the dangerous goods.

### 8.4 Specific Requirements

**Note:** Some Specific Requirements are followed by parentheses containing the letter B and a number. These parenthetical references specify the equivalent Special Provision in §172.102 of CFR 49.

The following Specific Requirements shall be applied pursuant to Clause 8.3:

1. Tanks shall be TC 407, TC 412, or TC 331 tanks having a minimum MAWP of 276 kPa, gauge (40 psi).
2. Tanks shall be TC 407, TC 412, or TC 331 tanks having a minimum MAWP of 172 kPa, gauge (25 psi).
3. Tanks shall be TC 406, TC 407, TC 412, or TC 331 tanks.
  - (a) means of containment
  - (a) shall be a specification tank listed in Specific Requirement 3;
  - (b) shall be a specification tank listed in Specific Requirement 2 if the combined vapour pressure of the product and any padding is greater than or equal to 200 kPa (29 psia) (absolute) at 46 °C (115°F); and

- (c) despite Item (a), may be a non-specification means of containment that complies with the requirements in Clause 4 if
  - (i) the capacity of the means of containment is greater than 3000 L; and
  - (ii) the tank is leak free and suitable for the transport of liquids.
- 5. A means of containment
  - (a) shall be a specification tank listed in Specific Requirement 3;
  - (b) shall be a specification tank listed in Specific Requirement 2 if the combined vapour pressure of the product and any padding is greater than or equal to 200 kPa (29 psia) (absolute) at 46 °C (115°F); and
  - (c) despite Item (a), may be a non-specification means of containment that complies with the requirements in Clause 4 if the capacity of the means of containment is greater than 3000 L.
- 6. Tanks shall not be loaded at ambient temperatures and lading temperatures exceeding those listed in column 1 of Table 3 in accordance with the volatility of the ladings (see column 2).(B33)

**Table 3**  
**Loading specifications**  
(See Specific Requirement 6.)

Column 1	Column 2
Maximum lading and ambient temperature	Volatility
55.0 °C (131°F)	RVP ≤61.8 kPa (9.0 psia)
51.1 °C (124°F)	RVP ≤81.0 kPa (10.0 psia)
46.7 °C (116°F)	RVP ≤79.0 kPa (11.5 psia)
41.7 °C (107°F)	RVP ≤92.8 kPa (13.5 psia)
37.8 °C (100°F)	RVP ≤103.1 kPa (15.0 psia)

**Note:** RVP refers to the Reid vapour pressure.

- 7. Tanks shall be
  - (a) TC 407, TC 412, or TC 331 tank having a minimum MAWP of 172 kPa, gauge (25 psi); and
  - (b) designed for a working temperature of at least 121 °C (250°F). (B5)
- 8. Tanks shall
  - (a) be TC 407, TC 412, or TC 331 tanks having a minimum MAWP of 1207 kPa, gauge (175 psi);
  - (b) not be equipped with bottom outlets; and
  - (c) be insulated so that the overall thermal conductance at 15.5 °C (60°F) is not more than 1.5333 kJ/h•m<sup>2</sup>•°C (0.075 Btu/h•ft<sup>2</sup>•°F). (B11)
- Δ 9. Tanks shall be
  - (a) TC 406 Crude, TC 406, TC 407, TC 412, or TC 331 tanks; or
  - (b) TC 306 or TC 306 tanks that meet the requirements of Clause A.9 of CSA B620-14;
- 10. Tanks shall contain a padding composed only of nitrogen, inert gas, or other inert material. (B16)
- 11. Open bins shall be authorized for iron oxide, spent, or iron sponge, spent (obtained from coal gas purification), UN1376. (B18)
- 12. Tanks shall
  - (a) comply with Specific Requirement 2;
  - (b) be insulated with at least 100 mm (4 in) of insulation, except that the insulation may be reduced to 51 mm (2 in) over exterior heater coils;
  - (c) not be equipped with interior heating coils;
  - (d) contain a padding composed only of inert gas, or be filled with water to the tanks' capacity; and
  - (e) not be loaded with dangerous goods at a temperature above the tank's design temperature range. (B26)

# ***Standards Update Service***

***B621-14***

***January 2014***

**Title:** *Selection and use of highway tanks, TC portable tanks, and other large containers for the transportation of dangerous goods, Classes 3, 4, 5, 6.1, 8, and 9*

**Pagination:** **32 pages** (ix preliminary and 23 text), each dated **January 2014**

To register for e-mail notification about any updates to this publication

- go to **shop.csa.ca**
- click on **CSA Update Service**

The **List ID** that you will need to register for updates to this publication is **2422519**.

If you require assistance, please e-mail [techsupport@csagroup.org](mailto:techsupport@csagroup.org) or call 416-747-2233.

Visit CSA Group's policy on privacy at [csagroup.org/legal](http://csagroup.org/legal) to find out how we protect your personal information.

**B621-14**  
***Selection and use of highway tanks,  
TC portable tanks, and other large  
containers for the transportation  
of dangerous goods, Classes 3, 4, 5,  
6.1, 8, and 9***



**CSA  
Group**

™A trademark of the Canadian Standards Association, operating as "CSA Group"

*Published in January 2014 by CSA Group  
A not-for-profit private sector organization  
5060 Spectrum Way, Suite 100, Mississauga, Ontario, Canada L4W 5N6  
1-800-463-6727 • 416-747-4044*

**Visit our Online Store at [shop.csa.ca](http://shop.csa.ca)**



CSA Group prints its publications on Rolland Enviro100, which contains 100% recycled post-consumer fibre, is EcoLogo and Processed Chlorine Free certified, and was manufactured using biogas energy.

To purchase standards and related publications, visit our Online Store at [shop.csa.ca](http://shop.csa.ca) or call toll-free 1-800-461-6727 or 416-747-4044.

ISSN 1978-1-77139-337-9

© 2014 CSA Group

All rights reserved. No part of this publication may be reproduced in any form whatsoever without the prior permission of the publisher.

# Contents

Technical Committee on Highway Tanks and TC Portable Tanks for the Transportation of Dangerous Goods v

Preface ix

## 1 Scope 1

## 2 Reference publications 2

## 3 Definitions 3

3.1 General 3

3.2 Definitions 3

## 4 Selection of the means of containment 3

4.1 General requirements 3

4.2 Means of containment 4

4.3 Dangerous goods and containment material compatibility 4

4.4 MAWP and pressure-relief valve settings 4

## 5 Highway tanks 5

5.1 Equivalent and substitute specifications 5

5.1.1 General 5

5.1.2 Ground clearance for equivalent and substitute specifications 5

5.2 Restriction on use of DOT 407, DOT 412, TC 412, MC 312, and TC 312 highway tanks 6

5.3 Specification TC 350 tanks 6

5.4 Inspection and testing 6

## 6 Portable tanks 7

6.1 General 7

6.2 Bottom discharge outlets — TC 60, CTC 60, and DOT 60 portable tanks 7

6.3 Inspection and testing 7

6.4 Selection and use of TC 56, CTC 56, and DOT 56 tanks 8

6.5 Selection and use of TC 57, CTC 57, and DOT 57 tanks 8

6.6 Tank protection 8

## 7 Use of means of containment 8

7.1 General requirements 8

7.2 Pre-loading requirements 9

7.3 Loading requirements 9

7.4 Post-loading requirements 10

7.5 Pre-unloading requirements 10

7.6 Unloading requirements 10

7.7 Post-unloading requirements 10

## 8 Tank selection requirements for dangerous goods of Classes 3, 4, 5, 6.1, 8, and 9 11

8.1 Classification, prohibition, and exemption under the *TDG Act and Regulations* 11

8.2 General tank selection requirements 11

8.3 Requirements for specific dangerous goods 11

8.4 Specific Requirements 11

**Tables**

- 1** — Equivalent and substitute specifications 5
- 2** — Equivalent and substitute portable tank specifications 7
- 3** — Loading specifications 12
- 4** — Liquid dangerous goods 14
- 5** — Solid dangerous goods 17

# ***Technical Committee on Highway Tanks and TC Portable Tanks for the Transportation of Dangerous Goods***

<b>D. Ferguson</b>	Goldec-Hamm's Manufacturing Ltd., Red Deer, Alberta	<i>Chair</i>
<b>D. Stainrod</b>	D.J. Stainrod & Associates Ltd., Bowmanville, Ontario	<i>Vice-Chair</i>
<b>F. Afshar</b>	B&M Risk Advice Inc., Markham, Ontario	<i>Associate</i>
<b>J. Albrechtsen</b>	Paul's Hauling Ltd., Winnipeg, Manitoba	
<b>R. Bahia</b>	Trimac Transportation Services, Calgary, Alberta	
<b>R. Baker</b>	Cryogenic Vessel Alternatives, Lafayette, Indiana, USA	
<b>S. Bartlett</b>	Air Products and Chemicals Inc., Allentown, Pennsylvania, USA	<i>Associate</i>
<b>R. Boies</b>	Gouvernement du Québec Ministère des Transports, Québec, Québec	
<b>A. Bourgault</b>	Gestion Robgroup Inc., Chambly, Quebec	
<b>G. Buck</b>	Pro-Par (1978) Inc., Sherbrooke, Québec	
<b>L. Burns</b>	Orica Mining Services, Calgary, Alberta	<i>Associate</i>
<b>R. Campbell</b>	Advance Engineered Products Limited, Regina, Saskatchewan	<i>Associate</i>
<b>G. Caron</b>	Gibson Energy Ltd., Edmonton, Alberta	
<b>D. Chaplow</b>	Ball Truck and Auto Repair, St. Thomas, Ontario	<i>Associate</i>
<b>A. Chatillon</b>	Tankcon FRP Inc., Blainville, Québec	
<b>P. Chilukuri</b>	Cusco Fabricators, Inc., Richmond Hill, Ontario	<i>Associate</i>

---

<b>L. Comtois</b>	Trimac Transportation Services, Kirkland, Québec	<i>Associate</i>
<b>J. Conley</b>	National Tank Truck Carriers Incorporated, Alexandria, Virginia, USA	<i>Associate</i>
<b>M. Denys</b>	ABSA, Edmonton, Alberta	
<b>G. Dickson</b>	LaSalle, Manitoba	<i>Associate</i>
<b>R. Dolyniuk</b>	Manitoba Trucking Association, Winnipeg, Manitoba	<i>Associate</i>
<b>P. Dubois</b>	Service Remtec Inc., Point-aux-Trembles, Québec	<i>Associate</i>
<b>B. Durstling</b>	Gibson Energy Ltd., Edmonton, Alberta	<i>Associate</i>
<b>A. Eleniak</b>	Xtreme, Sylvan Lake, Alberta	
<b>T. Hagglund</b>	Prosolve Consulting Ltd., Edmonton, Alberta	<i>Associate</i>
<b>J. Harpin</b>	Alberta Transportation, Edmonton, Alberta	<i>Associate</i>
<b>W. He</b>	Sino-Can Energy, Richmond Hill, Ontario	<i>Associate</i>
<b>C. Hochman</b>	U.S. Department of Transportation, Washington, DC, USA	<i>Associate</i>
<b>Y. Huang</b>	Royal & SunAlliance Insurance Company of Canada, Toronto, Ontario	
<b>J. Huby</b>	Dixon Group Canada Ltd., Innisfil, Ontario	<i>Associate</i>
<b>C. Hughes</b>	Transportation Technical Resources Ltd., Calgary, Alberta	
<b>S. Katz</b>	S. Katz and Associates Inc., North Vancouver, British Columbia	<i>Associate</i>
<b>C. Kirk</b>	Tremcar Technologies Inc., St-Jean-sur-Richelieu, Québec	<i>Associate</i>
<b>R. Lalonde</b>	Praxair Canada Inc., St-Laurent, Québec	
<b>S. Lam</b>	Technical Standards & Safety Authority, Toronto, Ontario	<i>Associate</i>

<b>R. Lloyd</b>	Performance Industries Project and Consulting, Red Deer, Alberta	<i>Associate</i>
<b>T. MacLean</b>	Transport Canada, Ottawa, Ontario	<i>Associate</i>
<b>N. Malone</b>	Canadian Association of Oilwell Drilling Contractors, Calgary, Alberta	<i>Associate</i>
<b>J. Meryo</b>	Amko Service Co., Midvale, Ohio, USA	
<b>A. Mohammed</b>	Ensign Energy Services, Nisku, Alberta	<i>Associate</i>
<b>B. Montague</b>	Erleigh Associates, Burlington, Ontario	<i>Associate</i>
<b>D. Moore</b>	Canadian Transportation Equipment Association, St. Thomas, Ontario	<i>Associate</i>
<b>M. Mullin</b>	Alberta Transportation, Edmonton, Alberta	
<b>M. Natale</b>	Dependable Truck & Tank Ltd., Brampton, Ontario	<i>Associate</i>
<b>C. Nowak</b>	Transport Canada, Ottawa, Ontario	
<b>J. Olson</b>	Olsen Logistics, Nisku, Alberta	
<b>R. Opersko</b>	Air Products Canada Limited, Nanticoke, Ontario	
<b>A. Paaren</b>	Tremcar Technologies Inc., Toronto, Ontario	
<b>A. Park</b>	Compressed Gas Association, Ottawa, Ontario	
<b>R. Reid</b>	Reid Engineering Services, Calgary, Alberta	
<b>T. Rishel</b>	Maxfield Inc., Crossfield, Alberta	<i>Associate</i>
<b>T. Rogers</b>	Container Technology Inc., Anton, Texas, USA	<i>Associate</i>
<b>D. Savard</b>	Innocar Inc., Lavaltrie, Québec	<i>Associate</i>
<b>M. Shah</b>	Technical Safety Authority of Saskatchewan, Regina, Saskatchewan	<i>Associate</i>

---

<b>M. Skinner</b>	Infrastructure Health and Safety Association, Mississauga, Ontario	<i>Associate</i>
<b>G. Snider</b>	Heavy Crude Hauling Ltd., Lloydminster, Alberta	<i>Associate</i>
<b>E. Snoeberger</b>	Alloy Custom Products, Lafayette, Indiana, USA	<i>Associate</i>
<b>G. Stewart</b>	Seaboard / Harmac, North York, Ontario	<i>Associate</i>
<b>R. Strelac</b>	Advance Engineering Products Limited, Regina, Saskatchewan	
<b>C. Turylo</b>	Technical Standards & Safety Authority, Toronto, Ontario	
<b>J. Van Benthem</b>	TE Designs, Calgary, Alberta	<i>Associate</i>
<b>G. Vincent</b>	Bedard Tankers, Montréal, Québec	
<b>W. Widla</b>	Fulton Engineered Specialties Inc., Caledon, Ontario	<i>Associate</i>
<b>F. Zhang</b>	Royal & SunAlliance Insurance Company of Canada, Brampton, Ontario	<i>Associate</i>
<b>R. Meyers</b>	CSA Group, Mississauga, Ontario	<i>Project Manager</i>

*The Technical Committee thanks Kevin Green of Transport Canada (retired) for his contributions to the development of this Standard.*

# Preface

This is the fifth edition of CSA B621, *Selection and use of highway tanks, TC portable tanks, and other large containers for the transportation of dangerous goods, Classes 3, 4, 5, 6.1, 8, and 9*. It supersedes the previous editions published in 2009, 2003, 1998, and 1987.

This Standard is one of a series of Standards that have been prepared for use in conjunction with the *Transportation of Dangerous Goods Regulations*. It should be noted that this Standard, by itself, does not have the force of law unless it is officially adopted by a regulatory authority. Since the Standard may be adopted into regulations with certain exceptions or additional requirements, it is recommended that the regulations of the relevant jurisdiction be consulted in order to establish the extent to which this Standard has been adopted. Where an industry practice differs from the requirements of this Standard, an application for a permit for equivalent level of safety may be requested from the regulatory authority.

This Standard was prepared giving due consideration to current industry practices in North America, the *US Code of Federal Regulations, Title 49*, and the United Nations publication *Recommendations on the Transport of Dangerous Goods: Model Regulations*. CSA B620-14, *Highway tanks and TC portable tanks for the transportation of dangerous goods*, is the reference document for design, construction, testing, and inspection requirements.

This Standard was prepared by the Technical Committee on Highway Tanks and TC Portable Tanks for Transportation of Dangerous Goods, under the jurisdiction of the Strategic Steering Committee on Mechanical Industrial Equipment Safety, and it has been formally approved by the Technical Committee.

## Notes:

- (1) Use of the singular does not exclude the plural (and vice versa) when the sense allows.
- (2) Although the intended primary application of this Standard is stated in its Scope, it is important to note that it remains the responsibility of the users of the Standard to judge its suitability for their particular purpose.
- (3) This Standard was developed by consensus, which is defined by CSA Policy governing standardization — Code of good practice for standardization as “substantial agreement. Consensus implies much more than a simple majority, but not necessarily unanimity”. It is consistent with this definition that a member may be included in the Technical Committee list and yet not be in full agreement with all clauses of this Standard.
- (4) To submit a request for interpretation of this Standard, please send the following information to [inquiries@csagroup.org](mailto:inquiries@csagroup.org) and include “Request for interpretation” in the subject line:
  - (a) define the problem, making reference to the specific clause, and, where appropriate, include an illustrative sketch;
  - (b) provide an explanation of circumstances surrounding the actual field condition; and
  - (c) where possible, phrase the request in such a way that a specific “yes” or “no” answer will address the issue.Committee interpretations are processed in accordance with the CSA Directives and guidelines governing standardization and are available on the Current Standards Activities page at [standardsactivities.csa.ca](http://standardsactivities.csa.ca).
- (5) This Standard is subject to review five years from the date of publication. Suggestions for its improvement will be referred to the appropriate committee. To submit a proposal for change, please send the following information to [inquiries@csagroup.org](mailto:inquiries@csagroup.org) and include “Proposal for change” in the subject line:
  - (a) Standard designation (number);
  - (b) relevant clause, table, and/or figure number;
  - (c) wording of the proposed change; and
  - (d) rationale for the change.

# B621-14

## ***Selection and use of highway tanks, TC portable tanks, and other large containers for the transportation of dangerous goods, Classes 3, 4, 5, 6.1, 8, and 9***

### **1 Scope**

#### **1.1**

This Standard details the requirements for the selection and use, handling, filling, and unloading of highway tanks, TC portable tanks, and other large containers when they are used as a primary means of containment for the transportation of dangerous goods of Classes 3, 4, 5, 6.1, 8, and 9.

#### **1.2**

This Standard sets out certain minimum requirements for the selection of the appropriate means of containment for the transportation of dangerous goods. This Standard does not, however, prescribe selection of the materials of construction of the means of containment to ensure chemical compatibility with the dangerous goods. Consequently, it is essential to exercise competent technical and engineering judgment in conjunction with this Standard.

#### **1.3**

Where any requirement of this Standard differs from the *Transportation of Dangerous Goods (TDG) Regulations*, the requirements of the *TDG Regulations* apply.

#### **1.4**

This Standard does not apply to TC 56, CTC 56, and DOT 56 tanks. Requirements for these tanks are provided in CAN/CGSB-43.146. (See [Clause 6.4.](#))

#### **1.5**

This Standard does not apply to TC 57, CTC 57, and DOT 57 tanks. Requirements for these tanks are provided in CAN/CGSB-43.146. (See [Clause 6.5.](#))

#### **1.6**

In CSA Standards, “shall” is used to express a requirement, i.e., a provision that the user is obliged to satisfy in order to comply with the standard; “should” is used to express a recommendation or that which is advised but not required; “may” is used to express an option or that which is permissible within the limits of the standard; and “can” is used to express possibility or capability.

Notes accompanying clauses do not include requirements or alternative requirements; the purpose of a note accompanying a clause is to separate from the text explanatory or informative material.

Notes to tables and figures are considered part of the table or figure and may be written as requirements.

Annexes are designated normative (mandatory) or informative (non-mandatory) to define their application.