

# INTERNATIONAL STANDARD

**IEC**  
**60603-7-7**

Second edition  
2006-06

---

---

## Connectors for electronic equipment -

### Part 7-7:

**Detail specification for 8-way, shielded,  
free and fixed connectors for data  
transmissions with frequencies up to 600 MHz**

© IEC 2006 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland  
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: [inmail@iec.ch](mailto:inmail@iec.ch) Web: [www.iec.ch](http://www.iec.ch)



Commission Electrotechnique Internationale  
International Electrotechnical Commission  
Международная Электротехническая Комиссия

PRICE CODE **XC**

*For price, see current catalogue*

## CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
<b>1 General.....</b>	<b>10</b>
1.1 Scope.....	10
1.2 Normative references.....	10
<b>2 Technical information.....</b>	<b>11</b>
2.1 Terms and definitions.....	11
2.2 Information on application.....	11
2.2.1 Transmission performance categories.....	12
2.2.2 Complete connectors (pairs).....	12
2.2.3 Interchangeability level.....	12
2.2.4 Shielding/grounding.....	13
2.2.5 Terminations.....	13
2.3 IEC type designation.....	13
<b>3 Dimensional information.....</b>	<b>15</b>
3.1 General.....	15
3.2 Isometric view.....	15
3.3 Common features.....	16
3.4 Engagement (mating) information.....	16
3.5 Fixed connectors.....	18
3.6 Free connectors.....	21
<b>4 Terminations.....</b>	<b>23</b>
4.1 Referenced termination types.....	23
4.1.1 Insulation displacement terminations.....	23
4.1.2 Crimp terminations.....	23
4.1.3 Insulation piercing terminations.....	23
4.1.4 Compliant pin (press-in).....	23
4.1.5 Spring clamp terminations.....	23
4.1.6 Non-referenced termination types.....	23
4.1.7 Solder terminations.....	24
4.2 Switch function.....	24
4.2.1 Basic switch function.....	24
4.2.2 Additional switch function.....	24
4.3 Accessories.....	24
4.4 Mounting information for fixed connectors.....	24
4.4.1 Hole pattern on printed boards.....	24
4.4.2 Mounting on panels.....	24
4.5 Mounting information for free connectors.....	24
<b>5 Gauges.....</b>	<b>24</b>
5.1 Fixed connectors.....	24
5.2 Free connectors.....	29
5.3 Probes.....	33
5.4 Contact resistance gauge.....	33
5.5 Test panel (for voltage proof test).....	33

6	Characteristics.....	33
6.1	General.....	33
6.2	Pin and pair grouping assignment.....	34
6.3	Climatic category.....	35
6.4	Electrical characteristics.....	35
6.4.1	Creepage and clearance distance.....	35
6.4.2	Voltage proof.....	36
6.4.3	Current-carrying capacity.....	36
6.4.4	Initial contact resistance.....	37
6.4.5	Input to output d.c. resistance.....	37
6.4.6	Input to output d.c. resistance unbalance.....	37
6.4.7	Insulation resistance.....	37
6.4.8	Transfer impedance.....	38
6.5	Transmission characteristics.....	38
6.5.1	Insertion loss.....	38
6.5.2	Return loss.....	38
6.5.3	Propagation delay.....	39
6.5.4	Delay skew.....	39
6.5.5	NEXT loss.....	39
6.5.6	Power sum NEXT loss (for information only).....	39
6.5.7	FEXT loss.....	39
6.5.8	Power sum FEXT loss (for information only).....	39
6.5.9	Transverse conversion loss.....	40
6.5.10	Transverse conversion transfer loss.....	40
6.5.11	Coupling attenuation.....	40
6.6	Mechanical characteristics.....	40
6.6.1	Mechanical operation.....	40
6.6.2	Effectiveness of connector coupling devices.....	41
6.6.3	Insertion and withdrawal forces.....	41
7	Tests and test schedule.....	41
7.1	General.....	41
7.2	Test procedures and measuring methods.....	41
7.3	Preconditioning.....	41
7.4	Wiring and mounting of specimens.....	42
7.4.1	Wiring.....	42
7.4.2	Mounting.....	42
7.5	Contact resistance measurement arrangement and procedure.....	42
7.5.1	Arrangement for contact resistance measurement.....	42
7.5.2	Test procedure for contact resistance measurement.....	43
7.6	Arrangement for dynamic stress tests (test phase CP1).....	43
7.7	Test schedules.....	43
7.7.1	Basic (minimum) test schedule.....	44
7.7.2	Full test schedule.....	44
	Annex A (normative) Gauging continuity procedure.....	53
	Annex B (normative) Locking device mechanical operation – Test procedure and requirements.....	56
	Annex C (normative) High frequency (category 7) transmission interoperability testing.....	57

Annex D (normative) General requirements for the measurement set-up.....	59
Annex E (normative) Insertion loss .....	64
Annex F (normative) Return loss .....	66
Annex G (normative) Near end cross talk (NEXT).....	68
Annex H (normative) Far end cross talk (FEXT).....	70
Annex I (normative) Transfer impedance .....	72
Annex J (normative) Transverse conversion loss (TCL) and transverse conversion transfer loss (TCTL).....	78
Annex K (normative) Termination of balun .....	81
Annex L (normative) Gauging requirements .....	82
Figure 1 – Isometric view, example fixed and free connector, free connector shown with both switch positions .....	15
Figure 2 – Contact interface dimensions with terminated free connector .....	16
Figure 3 – Physical interface, fixed connector, front view .....	18
Figure 4 – Physical interface, fixed connector, side view.....	19
Figure 5 – Physical interface, free connector .....	21
Figure 6 – “Go” gauge .....	25
Figure 7 – Fixed connector additional go gauge .....	25
Figure 8 – “No-go” gauge width .....	26
Figure 9 – “No-go” gauge height .....	26
Figure 10 – Fixed connector additional no-go gauges .....	27
Figure 11 – “No-go” gauges.....	29
Figure 12 – Free connector additional no-go gauges.....	30
Figure 13 – “Go” gauge .....	31
Figure 14 – Free connector additional go gauges.....	32
Figure 15 – Fixed connector pin and ball grouping assignment (front view of connector) .....	34
Figure 16 – Basic switch function .....	34
Figure 17 – Additional switch function.....	35
Figure 18 – Connector derating curve.....	36
Figure 19 – Arrangement for contact resistance measurement.....	42
Figure 20 – Arrangement for dynamic stress tests .....	43
Figure A.1 – Gauge .....	54
Figure A.2 – Gauge insertion.....	55
Figure C.1 – Free connector precision test fixture.....	57
Figure C.2 – Fixed connector precision test fixture .....	58
Figure D.1 – 180° hybrid used as a balun .....	60
Figure D.2 – Calibration of reference loads.....	61
Figure D.3 – Resistor load.....	62
Figure D.4 – Screened pyramid .....	63
Figure D.5 – Definition of reference planes.....	63
Figure E.1 – Calibration.....	64
Figure E.2 – Measuring set-up.....	65

Figure G.1 – NEXT measurement differential and common mode terminations.....	68
Figure H.1 – FEXT measurement differential and common mode terminations .....	70
Figure I.1 – Preparation of test specimen .....	73
Figure I.2 – Triaxial test set-up .....	74
Figure I.3 – Impedance matching for $R_1 < 50 \Omega$ .....	75
Figure I.4 – Impedance matching for $R_1 > 50 \Omega$ .....	76
Figure J.1 – TCL measurement .....	78
Figure J.2 – TCTL measurement .....	79
Figure K.1 – Balanced attenuator for balun centre tap grounded .....	81
Figure K.2 – Balanced attenuator for balun centre tap open .....	81
Table 1 – Physical interface, contacts interface .....	17
Table 2 – Fixed connector common dimensions.....	20
Table 3 – Common dimensions – free connector .....	22
Table 4 – Fixed connector gauge dimensions .....	28
Table 5 – Fixed connector, additional, gauge dimensions .....	28
Table 6 – Free connector NO-GO gauge dimensions .....	31
Table 7 – Free connector GO gauges dimensions.....	32
Table 8 – Free connector additional gauges dimensions .....	33
Table 9 – Climatic categories – selected values .....	35
Table 10 – Minimum distances .....	36
Table 11 – Test group P .....	44
Table 12 – Test group AP.....	45
Table 13 – Test group BP.....	47
Table 14 – Test group CP .....	48
Table 15 – Test group DP .....	49
Table 16 – Test group EP.....	50
Table 17 – Test group FP.....	51
Table 18 – Test group G.....	52
Table A.1 – Continuity gauge dimensions .....	55
Table D.1 – Test balun performance characteristics .....	61
Table F.1 – Uncertainty band of return loss measurement at frequencies below 100 MHz .....	67
Table F.2 – Uncertainty band of return loss measurement at frequencies above 100 MHz.....	67

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**CONNECTORS FOR ELECTRONIC EQUIPMENT –****Part 7-7: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 600 MHz**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as far as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent concerning the switch given in 2.2.2.

The IEC takes no position concerning the evidence, validity and scope of this patent right.

The holder of the patent right has assured the IEC that he/she is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with IEC. Information may be obtained from:

Nexans  
16, rue de Monceau  
75008 Paris  
France

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60603-7-7 has been prepared by subcommittee 48B: Connectors, of IEC technical committee 48: Electromechanical components and mechanical structures for electronic equipment.

This second edition cancels and replaces the first edition published in 2002. This edition constitutes a technical revision.

The following changes to the first edition have been made in this second edition:

- Many minor detail changes concerning the harmonization of this document, its specifications and its test procedures with those contained in the other IEC 60603-7 series standards.
- Significant performance improvements have been made to insertion loss and return loss, now specified to 1 000 MHz, for special applications (ISO/IEC 15018).

The text of this standard is based on the following documents:

FDIS	Report on voting
48B/1664/FDIS	48B/1691/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 60603 series, under the general title *Connectors for frequencies below 3 MHz for use with printed boards*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under <http://www.webstore.iec.ch> in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

## INTRODUCTION

This detail specification describes connectors according to IEC 60603-7 series connectors requirements.

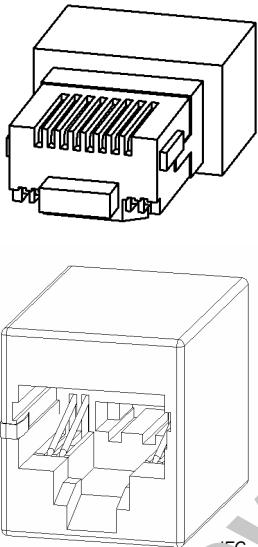
This detail specification describes connectors that are similar to and backward compatible with IEC 60603-7 series connectors. Backward compatibility definition and requirements are given in 2.2.

The complete requirements for the connectors described herein correspond to this detail specification and the current issues of IEC 60603-7 series, which are referenced herein accordingly.

Currently in preview, click buy full version

## CONNECTORS FOR ELECTRONIC EQUIPMENT –

### Part 7-7: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 600 MHz

<b>IEC SC 48B: LF connectors</b> Specification available from: IEC Central Office or the addresses shown on the inside cover.	<b>IEC 60603-7-7</b>
	<p>Detail specification for two-part cable to cable connector used for:</p> <ul style="list-style-type: none"> <li>- high speed communication applications up to 600 MHz</li> <li>- 4 balanced contact pairs (8 contacts)</li> <li>- compatibility with IEC 60603-7 series connectors</li> <li>- intended for inside-building cabling systems</li> </ul> <p>Typical construction is for cable mount for use in communication cabling systems</p> <p>Performance level(s): 1, 2            Assessment level(s): not applicable</p> <p>Reference data: not applicable</p>
Information on the availability of components qualified to this detail specification is not covered.	

## 1 General

### 1.1 Scope

This part of IEC 60603, which is part of the IEC 60603-7 series, covers 8 way connectors, up to 4 pairs, and specifies mechanical and environmental requirements, and electrical transmission requirements for frequencies up to 600 MHz. These connectors are typically used as category 7 connectors in class F cabling systems specified in ISO/IEC 11801:2002.<sup>1</sup>

The connectors are intermateable with IEC 60603-7-X series connectors.<sup>2</sup>

The connectors are interoperable with IEC 60603-7-X series connectors.<sup>3</sup>

The connectors are backward compatible with IEC 60603-7-X series connectors.<sup>4</sup>

### 1.2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050(581), *International Electrotechnical Vocabulary (IEV) – Chapter 581: Electro-mechanical components for electronic equipment*

IEC 60068-1, *Environmental testing – Part 1: General and guidance*

IEC 60068-2-38, *Environmental testing – Part 2: Tests – Test Z/AD: Composite temperature/humidity cyclic test*

IEC 60169-16, *Radio-frequency connectors – Part 16: R.F. coaxial connectors with inner diameter of outer conductor 7 mm (0.276 in, with screw coupling – Characteristic impedance 50 ohms (75 ohms) (Type N)*

IEC 60352-2, *Solderless connections – Part 2: Solderless crimped connections – General requirements, test methods and practical guidance*

IEC 60352-3, *Solderless connections – Part 3: Solderless accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-4, *Solderless connections – Part 4: Solderless non-accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-5, *Solderless connections – Part 5: Press-in connections – General requirements, test methods and practical guidance*

IEC 60352-6, *Solderless connections – Part 6: Insulation piercing connections – General requirements, test methods and practical guidance*

IEC 60352-7, *Solderless connections – Part 7: Spring clamp connections – General requirements, test methods and practical guidance*

IEC 60512 (all parts), *Connectors for electronic equipment – Tests and measurements*

---

1 ISO/IEC 11801 contains various 'category' designations corresponding to various frequency ranges.

2 Intermateability definition and requirements are given in 2.2.

3 Interoperability definition and requirements are given in 2.2.

4 Backward compatibility definition and requirements are given in 2.2.

IEC 60512-1-100, *Connectors for electronic equipment – Tests and measurements – Part 1-100: General – Applicable publications*

IEC 60603-1, *Connectors for frequencies below 3 MHz for use with printed boards – Part 1: Generic specification – General requirements and guide for the preparation of detail specifications, with assessed quality*

IEC 60603-7, *Connectors for frequencies below 3 MHz for use with printed boards – Part 7: Detail specification for connectors, 8-way, including fixed and free connectors with common mating features*

IEC 60603-7-5, *Connectors for electronic equipment – Part 7-5: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*<sup>5</sup>

IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 61076-1, *Connectors for electronic equipment – Product requirements – Part 1: Generic specification*

IEC 61156 (all parts), *Multicore and symmetrical pair/quad cables for digital communications*

ISO/IEC 11801:2002, *Information technology – Generic cabling for customer premises*

ISO 1302, *Geometrical Product Specifications (GPS) – Indication of surface texture in technical product documentation*

ITU-T G.117, *Transmission aspects of unbalance about earth*

ITU-T K.20, *Resistibility of telecommunication equipment installed in a telecommunications centre to overvoltages and overcurrents*

ITU-T K.44, *Resistibility tests for telecommunication equipment exposed to overvoltages and overcurrents – Basic recommendation*

ITU-T O.9, *Measuring arrangements to assess the degree of unbalance about earth*

EN 50289-1-14, *Communication Cables – Specifications for Test Methods – Part 1-14: Electrical Test Methods – Coupling attenuation or screening attenuation of connecting hardware*

---

<sup>5</sup> To be published.