

INTERNATIONAL STANDARD

IEC
60728-10

Second edition
2005-06

Cable networks for television signals, sound signals and interactive services –

Part 10: System performance of return paths

© IEC 2005 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

V

For price, see current catalogue

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	8
3 Terms, definitions, symbols and abbreviations.....	9
3.1 Terms and definitions	9
3.2 Symbols	11
3.3 Abbreviations	11
4 Methods of measurement	12
4.1 Set-up of the network	12
4.2 Measurement of signal level.....	14
4.3 Measurement of amplitude response variation.....	15
4.4 Measurement of signal to noise ratio (S/N).....	16
4.5 Measurement of multiple interference.....	18
4.6 Measurement of impulse noise	19
4.7 Measurement of echo ratio	20
4.8 Measurement of group delay variation.....	21
4.9 Measurement of frequency error.....	22
4.10 Measurement of bit error rate (BER).....	23
5 System performance requirements	24
5.1 General.....	24
5.2 Analogue parameters influencing system performance	26
5.3 General requirements.....	27
5.4 Specific system performance requirements	27
6 System performance recommendations	28
6.1 Proposal for the use of the return path bandwidth.....	28
 Annex A (informative) System performance requirements for different modulation techniques.....	 30
Annex B (normative) Correction factors for noise	31
 Bibliography.....	 33
 Figure 1 – Reference points of an active return path system (example).....	 7
Figure 2 – Procedure for setup and adjustment of an upstream plant.....	13
Figure 3 – Arrangement of test equipment for measurement of amplitude response variation.....	16
Figure 4 – Arrangement of test equipment for measurement of echo ratio.....	21
Figure 5 – Test set-up for frequency stability measurement	22
Figure 6 – Principle of BER measurement.....	23
Figure 7 – Upstream signals affecting downstream signals	25
Figure 8 – Downstream signals affecting upstream signals	25
Figure 9 – Upstream signals of service 1 affecting upstream signals of a different service (e.g. service 2)	26

Figure 10 – Upstream signals of a specific service (e.g. service 2) affecting upstream signals of the same service.....	26
Figure 11 – Identification of the most common sub-bands within the return path band with limited transmission quality.....	29
Figure B.1 – Noise correction factor $(CF)_{dB}$ versus measured level difference $(D)_{dB}$	32
Table 1 – Characterisation criteria for downstream and upstream operations.....	12
Table 2 – Examples of the Nyquist bandwidth of digitally modulated carriers.....	14
Table 3 – System performance requirements using a reference signal according to ES 200 800 (QPSK Grade C).....	28
Table 4 – Return path frequency ranges.....	28
Table 5 – Reasons for quality reduction in sub-bands of the return path.....	29
Table A.1 – System performance requirements for different modulation techniques for BER = 10^{-4}	30
Table B.1 – Noise correction factor.....	31

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**CABLE NETWORKS FOR TELEVISION SIGNALS,
SOUND SIGNALS AND INTERACTIVE SERVICES –****Part 10: System performance for return paths**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as far as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60728-10 has been prepared by technical area 5: Cable networks for television signals, sound signals and interactive services of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This second edition cancels and replaces the first edition published in 2001 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- New measurement method for amplitude response variation, 4.3
- Additional recommendations to documentation of measurement results in 4.5.6, 4.6.5.
- New subclause for measurement of group delay variation, 4.8

The text of this standard is based on the following documents:

FDIS	Report on voting
100/948/FDIS	100/978/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IEC 60728 consists of the following parts, under the general title *Cable networks for television signals, sound signals and interactive services*:

- Part 1: Methods of measurement and system performance
- Part 2: Electromagnetic compatibility for equipment
- Part 3: Active coaxial wideband distribution equipment (this publication)
- Part 4: Passive coaxial wideband distribution equipment
- Part 5: Headend equipment
- Part 6: Optical equipment
- Part 7-1: Hybrid fibre coax outside plant status monitoring – Physical (PHY) layer specification
- Part 7-2: Hybrid fibre coax outside plant status monitoring – Media access control (MAC) layer specification
- Part 7-3: Hybrid fibre coax outside plant status monitoring – Power supply to transponder interface bus (PSTIB) specification
- Part 9: Interfaces for CATV/SMATV headends and similar professional equipment for DVB/MPEG-2 transport streams
- Part 10: System performance of return paths
- Part 11: Safety
- Part 12: Electromagnetic compatibility of systems

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

INTRODUCTION

Standards of the IEC 60728 series deal with cable networks including equipment and associated methods of measurement for headend reception, processing and distribution of television signals, sound signals, interactive multimedia signals, interfaces and their associated data signals, using all applicable transmission media.

This includes:

- CATV-networks;
- MATV-networks and SMATV-networks;
- individual receiving networks,

and all kinds of equipment, systems and installations installed in such networks.

The extent of this standardisation work is from the antennas, special signal source inputs to the headend or other interface points to the network up to the terminal input.

The standardisation of any user terminals (i.e. tuners, receivers, decoders, terminals, etc.) as well as of any coaxial, balanced and optical cables and accessories thereto is excluded.

CABLE NETWORKS FOR TELEVISION SIGNALS, SOUND SIGNALS AND INTERACTIVE SERVICES –

Part 10: System performance for return paths

1 Scope

This part of IEC 60728 deals with the transparent return path of cable networks operated in the frequency range between 5 MHz and 65 MHz or parts thereof. Higher frequencies may be used in fibre based networks.

NOTE In addition, it is possible to use the frequency range from 0 MHz to 5 MHz for return path transmissions, for example for NMS or other control, monitoring and signalling purposes. Applications below 5 MHz are not covered by this standard.

An active return path carries typically only return signals. A passive return path can be used for both return and forward signals.

This standard lays down the basic methods of measurement for signals typically used in the return path of cable networks in order to assess the performance of those signals and their performance limits.

All requirements refer to the performance limits, which shall be obtained between the reference points (Figure 1) of the return path system.

One reference point is the network termination close to the subscriber. It is the last point where all forward and return signals are present and carried on the same cable. If no network termination point exists, the reference point is the system outlet.

The other reference point is the input of the return signal receiver (or transceiver). At this point, the transparent signal path ends and beyond this point, the signal is treated in a non-transparent way. The return signal receiver can be situated at the headend but can also be at the node of the coaxial cell or at any other point of the network.

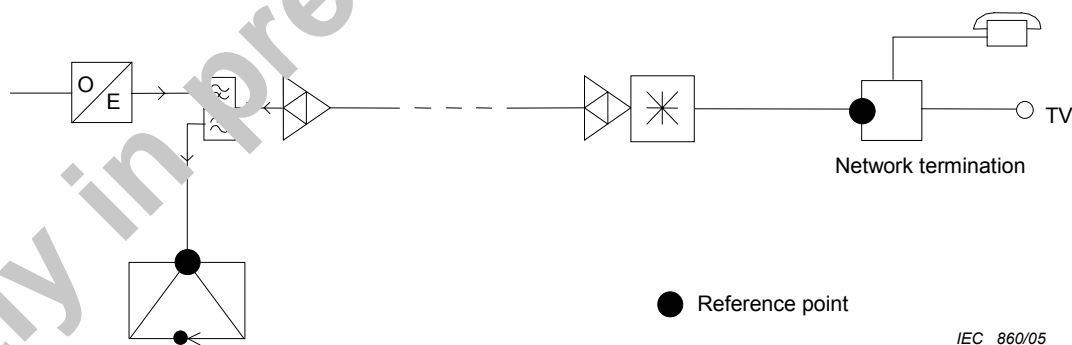


Figure 1 – Reference points of an active return path system (example)

In addition to the system performance requirements for the transparent return path, system performance recommendations were laid down in this standard, for example for the overall frequency allocation, for the use of specific modulation techniques for different interactive multimedia services or for different sub-bands within the return path frequency range, etc.

Specific equipment installed in cable networks for the operation of such return paths is standardised in the relevant equipment standards, parts 3 to 6 of the IEC 60728 series.

Transmission systems are not within the scope of this standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60728-1:2001, *Cable networks for television signals, sound signals and interactive services – Part 1: Methods of measurement and system performance*

IEC 60728-2:2002, *Cable networks for television signals, sound signals and interactive services – Part 2: Electromagnetic compatibility for equipment*

IEC 60728-3, *Cable networks for television signals, sound signals and interactive services – Part 3: Active coaxial wideband distribution equipment*

IEC 60728-4:2000, *Cable networks for television signals, sound signals and interactive services – Part 4: Passive coaxial wideband distribution equipment*

IEC 60728-5:2001, *Cable networks for television signals, sound signals and interactive services – Part 5: Headend equipment*

IEC 60728-6:2003, *Cable networks for television signals, sound signals and interactive services – Part 6 Optical equipment*

IEC 60728-11:2005, *Cable networks for television signals, sound signals and interactive services – Part 11: Safety*

IEC 60728-12:2001, *Cable networks for television signals, sound signals and interactive services – Part 12: Electromagnetic compatibility of systems*

ITU-R Recommendation BT.6/BL22: 2005, *Conventional analogue television systems*

ITU-T Recommendation J.61:1990, *Transmission performance of television circuits designed for use in international connections* (Published as ITU-R Rec. CMTT 567-3 in CCIR Recommendations, Volume XII, Düsseldorf, 1990)

EN 200 800 V1.3.1:2001, *Digital Video Broadcasting (DVB); DVB interaction channel for Cable TV distribution systems (CATV)*