

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Digital addressable lighting interface –
Part 202: Particular requirements for control gear – Self-contained emergency
lighting (device type 1)**

**Interface d'éclairage adressable numérique –
Partie 202: Exigences particulières pour les appareillages de commande –
Blocs autonomes d'éclairage de secours (dispositifs de type 1)**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Digital addressable lighting interface –
Part 202: Particular requirements for control gear – Self-contained emergency
lighting (device type 1)**

**Interface d'éclairage adressable numérique –
Partie 202: Exigences particulières pour les appareillages de commande –
Blocs autonomes d'éclairage de secours (dispositifs de type 1)**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.140.50; 29.140.99

ISBN 978-2-8322-6212-2

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	9
2 Normative references	9
3 Terms and definitions	9
4 General	12
4.1 General.....	12
4.2 Version number	12
4.3 Power supply of bus units	12
4.4 Power interruption at bus units.....	13
4.4.1 General	13
4.4.2 Power interruptions of external power supply.....	13
4.4.3 Communication requirements in rest mode and emergency mode.....	13
4.4.4 Endurance of REST MODE.....	13
5 Electrical specification.....	13
6 Interface power supply	13
7 Transmission protocol structure.....	13
8 Timing	14
9 Method of operation.....	14
9.1 General.....	14
9.2 Command execution	14
9.3 Non-controllable control gear.....	14
9.3.1 General	14
9.3.2 Command execution of non-controllable control gear.....	14
9.3.3 Status bits of non-controllable control gear.....	15
9.4 Emergency level	15
9.4.1 General	15
9.4.2 Emergency operation light output and emergency level	15
9.4.3 Emergency physical maximum and minimum level.....	15
9.4.4 Configuring emergency level.....	16
9.4.5 Testing of emergency level.....	16
9.5 Mode transition timing and behaviour.....	16
9.6 System failure.....	18
9.7 Modes of operation	18
9.7.1 General	18
9.7.2 Normal mode.....	19
9.7.3 Inhibit mode.....	20
9.7.4 Emergency mode.....	21
9.7.5 Extended emergency mode.....	22
9.7.6 Rest mode	23
9.7.7 Mode 'Function test in progress'	24
9.7.8 Mode 'Duration test in progress'	25
9.7.9 Mode 'Battery cut-off'.....	27
9.8 Emergency test functions and configuration	27
9.8.1 General	27
9.8.2 Automatic testing.....	27

9.8.3	Automatic test execution status	30
9.8.4	Querying test results.....	31
9.8.5	Extended test duration.....	31
9.8.6	Timing definitions	32
9.9	Protection functionalities in emergency mode	33
9.10	Emergency mode and operating modes	33
9.11	Hardwired emergency inputs.....	33
9.11.1	General	33
9.11.2	Hardwired inhibit input.....	33
9.11.3	Hardwired switch	33
9.12	Control gear status and capabilities	34
9.12.1	General	34
9.12.2	Modification to "lampOn"	34
9.12.3	Rated duration and battery charge	34
9.12.4	Emergency status	34
9.12.5	Emergency mode.....	35
9.12.6	Emergency features.....	36
9.12.7	Emergency failure status	37
9.12.8	Hardwired switch status.....	38
9.12.9	Emergency lamp operation time.....	38
9.13	Restricting device type support	39
9.14	Installation inhibit.....	39
9.15	Memory banks	39
9.15.1	General	39
9.15.2	Accuracy of measurements.....	39
9.15.3	Rounding of measurement values.....	39
9.15.4	Refresh rate of memory bank values.....	40
9.15.5	No overflow of counter.....	40
9.15.6	Memory bank 208. Emergency control gear information.....	40
10	Declaration of variables.....	45
10.1	General.....	45
10.2	Impact on control gear variables depending on control gear type	45
10.3	Control gear variables for all self-contained control gear.....	46
11	Definition of commands	47
11.1	General.....	47
11.2	Overview sheets	47
11.3	Level instructions	50
11.4	Configuration instructions	50
11.4.1	General	50
11.4.2	IDENTIFY DEVICE	50
11.5	Queries.....	50
11.5.1	General	50
11.5.2	QUERY ACTUAL LEVEL.....	50
11.6	Application extended commands.....	50
11.6.1	General	50
11.6.2	Configuration instructions	51
11.6.3	Queries.....	55
11.7	Special commands.....	58
11.7.1	General	58

11.7.2	ENABLE DEVICE TYPE (<i>data</i>).....	58
Annex A (informative)	Enabling or re-enabling installation inhibit	59
A.1	General.....	59
A.2	Re-enabling installation inhibit	59
A.3	Modifying or cancelling installation inhibit operation	59
	Bibliography.....	60
Figure 1	– IEC 62386 graphical overview	7
Figure 2	– Modes and transitions	19
Figure 3	– Timing diagram for function and duration tests	28
Figure 4	– Duration test execution time out example	31
Table 1	– Mode transition behaviour	17
Table 2	– Bus power interruption behaviour	18
Table 3	– Normal mode.....	20
Table 4	– Inhibit mode	21
Table 5	– Emergency mode	22
Table 6	– Extended emergency mode	23
Table 7	– Rest mode.....	24
Table 8	– Mode 'Function test in progress'	25
Table 9	– Mode 'Duration test in progress'	26
Table 10	– Mode 'Battery cut-off'	27
Table 11	– " <i>extendedDuration</i> "	32
Table 12	– Timing definitions	32
Table 13	– " <i>emergencyStatus</i> ".....	35
Table 14	– " <i>emergencyMode</i> ".....	36
Table 15	– " <i>emergencyFeatures</i> ".....	36
Table 16	– " <i>emergencyFailureStatus</i> "	37
Table 17	– " <i>hardwiredSwitchStatus</i> "	38
Table 18	– Memory bank 208: Self-contained emergency control gear information.....	40
Table 19	– Modification of control gear variables.....	45
Table 20	– Declaration of additional variables.....	46
Table 21	– Application extended commands	48
Table 22	– Perform DTR selected function.....	55
Table 23	– Query selected variable.....	56

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL ADDRESSABLE LIGHTING INTERFACE –**Part 202: Particular requirements for control gear –
Self-contained emergency lighting (device type 1)**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. For this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publications"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as far as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62386-202 has been prepared by IEC technical committee 34: Lighting. It is an International Standard.

This second edition cancels and replaces the first edition published in 2009. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) scope updated,
- b) hardwired switch operation can be disabled,
- c) installation inhibit feature added,
- d) memory bank added,
- e) modes of operation clarified, with some changes and additions,
- f) command added to enter extended emergency mode,

g) command added to extend time in duration test mode.

The text of this International Standard is based on the following documents:

Draft	Report on voting
34/986/FDIS	34/1000/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

This Part 202 of IEC 62386 is intended to be used in conjunction with:

- Part 101, which contains general requirements for system components;
- Part 102, which contains general requirements for control gear.

A list of all parts in the IEC 62386 series, published under the general title *Digital addressable lighting interface*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 62386 contains several parts, referred to as series. The IEC 62386 series specifies a bus system for control by digital signals of electronic lighting equipment. The IEC 62386-1xx series includes the basic specifications. Part 101 contains general requirements for system components, Part 102 extends this information with general requirements for control gear and Part 103 extends it further with general requirements for control devices. Part 104 and Part 105 can be applied to control gear or control devices. Part 104 gives requirements for wireless and alternative wired system components. Part 105 describes firmware transfer. Part 150 gives requirements for an auxiliary power supply which can be stand-alone, or built into control gear or control devices.

The IEC 62386-2xx series extends the general requirements for control gear with lamp specific extensions (mainly for backward compatibility with Edition 1 of IEC 62386) and with control gear specific features.

The IEC 62386-3xx series extends the general requirements for control devices with input device specific extensions describing the instance types as well as some common features that can be combined with multiple instance types.

This second edition of IEC 62386-202 is intended to be used in conjunction with IEC 62386-101 and IEC 62386-102 and with the various parts that make up the IEC 62386-2xx series for control gear, and can be used together with IEC 62386-103 and the various parts that make up the IEC 62386-3xx series of particular requirements for control devices. The division into separately published parts provides for ease of future amendments and revisions. Additional requirements will be added as and when a need for them is recognised.

The setup of the standards is graphically represented in Figure 1 below.

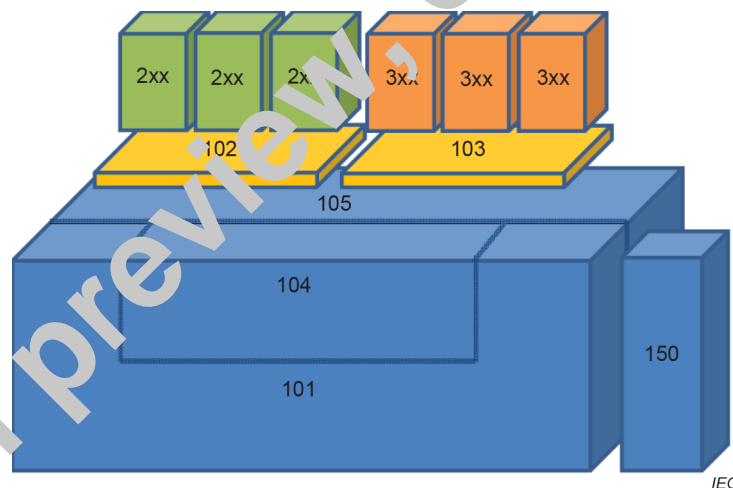


Figure 1 – IEC 62386 graphical overview

Whenever this part of IEC 62386 refers to any of the clauses of the IEC 62386-1xx series, the extent to which such a clause is applicable is specified. The other parts also include additional requirements, as necessary.

All numbers used in this document are decimal numbers unless otherwise noted.

Hexadecimal numbers are given in the format 0xVV, where VV is the value. Binary numbers are given in the format XXXXXXXXb or in the format XXXX XXXX, where X is 0 or 1 and "x" in binary numbers means "don't care". Where a variable is referred by a bit number, bit 0 is the least significant bit.

The following typographic expressions are used:

Variables: *variableName* or *variableName[3:0]*, giving only bits 3 to 0 of *variableName*;

Range of values: [lowest, highest];

Command: "COMMAND NAME".

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 202: Particular requirements for control gear – Self-contained emergency lighting (device type 1)

1 Scope

This part of IEC 62386 is applicable to control gear for control by digital signals of electronic lighting equipment which is associated with self-contained emergency lighting as described in IEC 61347-2-7 with additional control interface for configuring emergency operation.

This document is only applicable to control gear complying with IEC 62386-102.

This document does not apply to centrally supplied emergency lighting control gear, which is specified in IEC 62386-220.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62386-101:2022, *Digital addressable lighting interface – Part 101: General requirements – System components*

IEC 62386-102:2022, *Digital addressable lighting interface – Part 102: General requirements – Control gear*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62386-101 and IEC 62386-102 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

battery cut-off

mode of operation in which the normal supply is disconnected and the battery voltage is below the battery cut-off voltage

Note 1 to entry: Reaching this point can trigger the device to protect against extensive discharge as defined in IEC 61347-2-7:2011, 3.4 and IEC 61347-2-7:2011/AMD2:2021, 3.4.

3.2

battery cut-off voltage

battery voltage, below which the battery can no longer power the control gear or lamp(s)