



The Five Lighting Metrics

Currently in preview, click buy full version

The Five Lighting Metrics

Update authored by:

Daniel Rogers

ICF International

Original Author:

Joseph R. Murdoch

Publication of this Technical Memorandum
has been approved by the IES.
Suggestions for revision should be
directed to the IES.

Copyright 2012 by the Illuminating Engineering Society of North America.

Approved by the IES Board of Directors, June 1, 2012, as a Transaction of the Illuminating Engineering Society of North America.

All rights reserved. No part of this publication may be reproduced in any form, in any electronic retrieval system or otherwise, without prior written permission of the IES.

Published by the Illuminating Engineering Society of North America, 120 Wall Street, New York, New York 10005.

IES Standards and Guides are developed through committee consensus and produced by the IES Office in New York. Careful attention is given to style and accuracy. If any errors are noted in this document, please forward them to Rita Harrold, Director of Technology, at the above address for verification and correction. The IES welcomes and urges feedback and comments.

ISBN # 978-0-87995-264-8.

Printed in the United States of America.

DISCLAIMER

IES publications are developed through the consensus standards development process approved by the American National Standards Institute. This process brings together volunteers representing varied viewpoints and interests to achieve consensus on lighting recommendations. While the IES administers the process and establishes policies and procedures to promote fairness in the development of consensus, it makes no guaranty or warranty as to the accuracy or completeness of any information published herein.

The IES disclaims liability for any injury to persons or property or other damages of any nature whatsoever, whether special, indirect, consequential or compensatory, directly or indirectly resulting from the publication, use of, or reliance on this document.

In issuing and making this document available, the IES is not undertaking to render professional or other services for or on behalf of any person or entity. Nor is the IES undertaking to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment or, as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

The IES has no power, nor does it undertake, to police or enforce compliance with the contents of this document. Nor does the IES list, certify, test or inspect products, designs, or installations for compliance with this document. Any certification or statement of compliance with the requirements of this document shall not be attributable to the IES and is solely the responsibility of the certifier or maker of the statement.

Contents

1.0 LUMINOUS FLUX (Φ)	1
2.0 LUMINOUS INTENSITY (I)	1
3.0 ILLUMINANCE (E)	3
4.0 LUMINANCE (L)	5
5.0 LUMINOUS EXITANCE (M)	6
References	8

Currently in preview, click buy full version

THE FIVE LIGHTING METRICS

Every discipline has its own special terminology and lighting is no exception. Fortunately, in lighting, there are only five basic metrics that need to be learned; unfortunately, they have similar names and unusual units, and may be a challenge for a beginner in lighting to comprehend and understand.

For those readers new to lighting but not to the broader field of electromagnetic radiation, **light** is defined as radiant energy that is capable of exciting the retina and producing a visual sensation.

1.0 LUMINOUS FLUX (Φ)

Luminous Flux is the time rate of flow of light (evaluated in terms of what the “average” human eye¹ sees) from a source summed over all directions. Unless otherwise noted, luminous flux is defined for photopic vision.²

The symbol for luminous flux is the Greek letter “Phi” (Φ).

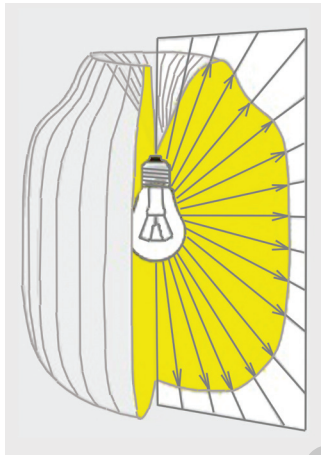


Figure 1.³
Light output illustration.

The SI (International System of Units) unit of luminous flux is the **lumen** (lm).

Figure 1 illustrates the light output or luminous flux leaving the lamp in nearly all directions.

The most common analogy is fluid flux, which is the time rate of flow of water, as shown in **Figure 2**;



Figure 2. Garden hose. (Image courtesy of iStockphoto)

when the garden hose valve is opened, streams of water emerge and travel outward. (Were it not for gravity, the analogy would be complete, but the water streams eventually bend toward the ground.)

A second analogy is the electrical one, in which luminous flux is compared to electric current, in amperes, which is the rate of flow of electric charge through a wire.

A lamp consumes watts and produces (or emits) lumens; the measure of its success in doing this is called “efficacy” and is measured in lumens per watt. **Table 1** provides the lumen output and efficacy of a few common lamps.

2.0 LUMINOUS INTENSITY (I)

Luminous intensity is the luminous flux per unit solid angle (the three dimensional equivalent of the traditional two dimensional angle) of a light source in a given direction.

The symbol for luminous intensity is the capital letter I .

Table 1: Lamp Efficacies

LAMP	LUMINOUS FLUX (lumens)	LAMP EFFICACY (lumens per watt)
28-watt T5 linear fluorescent*	2900	103.6
29-watt High Performance T8 linear fluorescent*	3100	96.9
34-watt T5HO (high output) linear fluorescent*	5000	92.6
100-watt ceramic metal halide*	9000	90.0
26-watt compact fluorescent (quad)*	1800	75.0
50-watt tungsten halogen (low voltage reflector)	900	18.0
60-watt incandescent (A lamp)	840	14.0

*A ballast is required to operate these lamps, therefore system efficacy will not equal lamp efficacy.