

IPC-A-640A

2022 - April

Acceptance Requirements for Optical Fiber, Optical Cable, and Hybrid Wiring Harness Assemblies

Supersedes IPC-A-640
May 2017

An international standard developed by IPC



BUILD ELECTRONICS BETTER

The Principles of Standardization

In May 1995 the IPC's Technical Activities Executive Committee (TAEC) adopted Principles of Standardization as a guiding principle of IPC's standardization efforts.

Standards Should:

- Show relationship to Design for Manufacturability (DFM) and Design for the Environment (DFE)
- Minimize time to market
- Contain simple (simplified) language
- Just include spec information
- Focus on end product performance
- Include a feedback system on use and problems for future improvement

Standards Should Not:

- Inhibit innovation
- Increase time-to-market
- Keep people out
- Increase cycle time
- Tell you how to make something
- Contain anything that cannot be defended with data

Notice

IPC Standards and Publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such Standards and Publications shall not in any respect preclude any member or nonmember of IPC from manufacturing or selling products not conforming to such Standards and Publication, nor shall the existence of such Standards and Publications preclude their voluntary use by those other than IPC members, whether the standard is to be used either domestically or internationally.

Recommended Standards and Publications are adopted by IPC without regard to whether their adoption may involve patents on articles, materials, or processes. By such action, IPC does not assume any liability to any patent owner, nor do they assume any obligation whatever to parties adopting the Recommended Standard or Publication. Users are also wholly responsible for protecting themselves against all claims of liabilities for patent infringement.

IPC Position Statement on Specification Revision Change

It is the position of IPC's Technical Activities Executive Committee that the use and implementation of IPC publications is voluntary and is part of a relationship entered into by customer and supplier. When an IPC publication is updated and a new revision is published, it is the opinion of the TAEC that the use of the new revision as part of an existing relationship is not automatic unless required by the contract. The TAEC recommends the use of the latest revision. Adopted October 6, 1998

Why is there a charge for this document?

Your purchase of this document contributes to the ongoing development of new and updated industry standards and publications. Standards allow manufacturers, customers, and suppliers to understand one another better. Standards allow manufacturers greater efficiencies when they can set up their processes to meet industry standards, allowing them to offer their customers lower costs.

IPC spends hundreds of thousands of dollars annually to support IPC's volunteers in the standards and publication development process. There are many rounds of drafts sent out for review and the committees spend hundreds of hours in review and development. IPC's staff attends and participates in committee activities, typesets and circulates document drafts, and follows all necessary procedures to qualify for ANSI approval.

IPC's membership dues have been kept low to allow as many companies as possible to participate. Therefore, the standards and publications revenue is necessary to complement dues revenue. The price schedule offers a 50% discount to IPC members. If your company buys IPC standards and publications, why not take advantage of this and the many other benefits of IPC membership as well? For more information on membership in IPC, please visit www.ipc.org or call 847/597-2872.

Thank you for your continued support.



IPC-A-640A

Acceptance Requirements for Optical Fiber, Optical Cable, and Hybrid Wiring Harness Assemblies

Developed by the Fiber Optic Cable Acceptability Task Group (7-31m) of
the Product Assurance Committee (7-30) of IPC.

Supersedes:

IPC-A-640, May 2017

Users of this publication are encouraged to participate in the
development of future revisions.

Contact:

IPC
3000 Lakeside Drive, Suite 105 N
Bannockburn, Illinois
60015-1249
Tel 847 615.7100
Fax 847 615.7105

**HIERARCHY OF IPC ACCEPTANCE SPECIFICATIONS
(IPC-A-640A SERIES)**

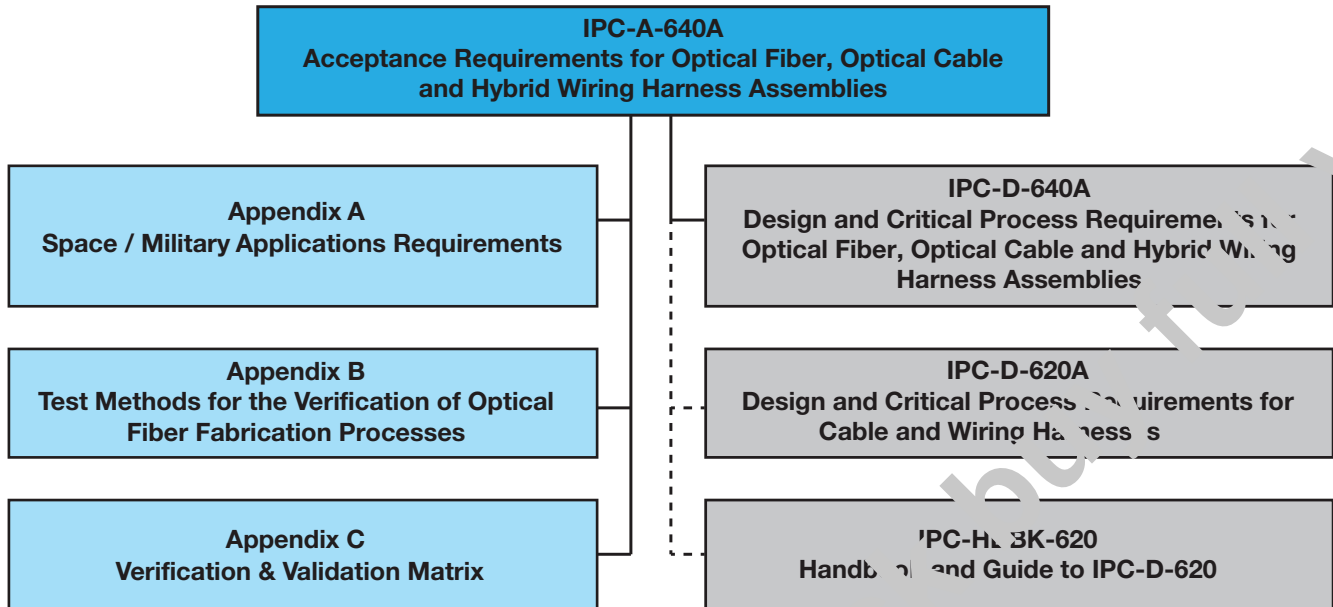


Figure 1 Hierarchy of IPC Design Specifications (IPC-A-640A Series)

FOREWARD

This standard provides information on the design and acceptance requirements for optical fiber, optical cable and hybrid wiring harness to the extent that they can be applied to the broad spectrum of optical cable and wiring harness design. It is therefore crucial that decisions concerning the choice of product classification, fiber technology, connectorization requirements, and performance and reliability requirements be made as early as possible.

As optical wiring and connector technology changes, specific requirements will be updated or new requirements added to the document set.

IPC invites input on the effectiveness of the documentation and encourages User response through completion of "Suggestions for Improvement" form located at the end of each document.

Acknowledgment

Any document involving a complex technology draws material from a vast number of sources across many continents. Shown below are the principal members of the Fiber Optic Cable Acceptability Task Group (7-31m) of the Product Assurance Committee (7-30). It is not possible to include all of those who assisted in the evolution of this standard. To each of them, the members of the IPC extend their gratitude.

Product Assurance Committee

Chair
Robert Cooke
NASA Johnson Space Center

Vice Chair
Debbie Wade
Advanced Rework Technology

Fiber Optic Cable Acceptability Task Group

Chair
Robert Cooke
NASA Johnson Space Center

Vice Chair
Sean Keating
Clonfert Solutions Ltd

Technical Liaisons of the IPC Board of Directors

Bob Neves
Microtek (Changzhou) Laboratories

Fiber Optic Cable Acceptability Task Group

Tiberiu Baranyi
NASA Goddard Space Flight Center

Kevin Boblits
BAE Systems

Gerald Bogert
Advanced Rework Technology Ltd

Robert Cooke
Collins Aerospace

Francesco Di Maio
GESTLABS S.r.l.

Chris Fitzgerald
Bechtel Plant Machinery, Inc.

Symon Franklin

Kurt Frost
L3 Technologies Communication
Systems – West

Sean Keating
K&M Manufacturing Solutions, LLC

Rebekah Kowalk
Projects Limited Inc.

Jan S. ...
Lockheed Martin

Darrell Sensing
NASA Johnson Space Center

Jared Spencer
Clonfert Solutions Ltd

Debie Vorwald
Custom Interconnect Ltd

Debbie Wade
Flextronics Romania SRL

This Page Intentionally Left Blank

Currently in preview, click buy full version

Table of Contents

1 GENERAL	1	1.18.1 Control	7
1.1 Scope	1	1.18.2 Calibration	7
1.2 Purpose	1	1.19 Electrostatic Discharge (ESD) Protection	8
1.3 Performance / Product Classification	2	1.20 Contamination	8
1.3.1 Performance / Product Classification - Definitions	2	1.21 Rework / Repair	8
1.4 Definition of Requirements	2	1.22 Statistical Process Control (SPC)	8
1.4.1 Requirement Format (N/A/D)	2	1.23 Supply Chain Traceability	8
1.4.2 Requirements Flowdown	3	2 APPLICABLE DOCUMENTS	8
1.5 Note(s) / Italicized Text	3	2.1 IPC	8
1.6 Commercial Off-the-Shelf (COTS)	3	2.2 American Society of Mechanical Engineers (ASME)	9
1.7 Existing or Previously Approved Designs	3	2.3 ASTM International	9
1.8 Line Drawings and Illustrations	3	2.4 EOS/ESD Association	9
1.9 Measurement Units and Applications	3	2.5 Institute of Electrical and Electronics Engineers (IEEE)	9
1.10 Acronyms, Abbreviations, and Terms	3	2.6 International Electrotechnical Commission (IEC)	9
1.10.1 Use of Lead	4	2.7 Laser Institute of America (LIA)	9
1.10.2 Periodic Table Elements	4	2.8 National Aeronautics and Space Administration (NASA)	9
1.11 Engineering Documentation	4	2.9 National Fire Protection Association (NFPA)	9
1.12 Order of Precedence	4	2.10 NCSL International	9
1.12.1 Conflict	4	2.11 Telecommunications Industry Association	9
1.12.2 Clause References	4	2.12 United States Department of Defense (DoD)	9
1.13 Appendices A – C	4	2.13 UL	10
1.14 Approval of Departures from Standards and Requirements	4	2.14 Reference	10
1.15 Personnel Proficiency	5	3 ASSEMBLY	11
1.16 Facilities	5	3.1 Handling – Optical Fiber / Optical Cable, General Requirements	12
1.16.1 Temperature	5	3.1.1 Handling - Optical Fiber / Optical Cable – Work-In-Progress	12
1.16.2 Humidity	5	3.2 Optical Fiber End Preparation	13
1.16.3 Process Control & Test	5	3.2.1 Procedures – Optical Fiber Processing	13
1.16.4 Positive Pressure	5	3.3 Splicing	14
1.16.5 Personnel Behavior	5	3.3.1 Fusion Splicing	14
1.16.6 Field Assembly Operations	5	3.3.2 Mechanical Splicing	14
1.16.7 Foreign Object Debris (FOD) Control Plan	5	3.3.3 Chemical Splicing	14
1.17 Safety	5	3.3.4 Environmental Seals	15
1.17.1 Chemicals	6	3.3.5 Location	15
1.17.2 Epoxies/Adhesives	6	3.3.6 Protection	15
1.17.3 Toxic Products and Formulations	6	3.3.7 Testing	15
1.17.4 Protection from Bare Fibers	6	3.4 Optical Fiber Cable Assemblies	15
1.17.5 Eye Safety – Energized Source Concern	6		
1.18 Tools and Equipment	7		

3.5	Optical Fiber Assemblies	15	8	QUALITY ASSURANCE REQUIREMENTS – GENERAL AND VISUAL	22
3.6	Cleanliness	16	8.1	Product Class Conditions	22
3.7	Inspection	16	8.2	Inspection	23
3.8	Post-assembly Test	16	8.3	Responsibility for Inspections and Tests	23
3.9	Post-test Inspection	16	8.4	Classification of Inspections and Tests	23
3.10	Documentation	16	8.4.1	Parts, Materials and Process Controls	23
3.10.1	Traceability	16	8.4.2	Process Verification Audit	24
3.10.2	Test Data	16	8.4.3	Acceptance and Qualification Testing	24
4	INSTALLATION	16	8.4.4	Workmanship	24
4.1	General Installation Requirements	16	8.5	Visual Acceptance Criteria	29
4.1.1	Bundling (Fiber in the Wiring Harness)	16	9	QUALITY ASSURANCE REQUIREMENTS – TEST	69
4.1.2	Conduits	16	9.1	Link Loss Budget	69
4.1.3	Bend Radii	16	9.2	Test Conditions	69
4.1.4	Axial Alignment	16	9.2.1	Standard Test Conditions	69
4.1.5	Tensile Load	17	9.2.2	Extended Test Conditions	69
4.1.6	Mating	17	9.3	Safety Precautions	70
4.1.7	Torquing	17	9.3.1	Laser Service Group Definitions	70
4.1.8	Coefficient of Thermal Expansion (CTE) Issues	17	9.3.2	Laser Safety Precautions	70
4.2	Routing	17	9.3.3	Personnel Safety Precautions	70
4.3	Protection and Support	17	9.4	Acceptance and Qualification Testing	71
5	CLEANING	18	9.4.1	Receiving and Inspection	71
5.1	General Requirements	18	9.4.2	Acceptance Test	71
5.1.1	Solvents	18	9.4.3	Testing after Rework or Repair	71
5.1.2	Canned Air	18	9.4.4	Test Discrepancy/Failure	71
5.1.3	Compressed Air / Dry Nitrogen / Other Gas Media	19	9.4.5	Qualification	71
5.1.4	Wipes/Swabs	19	9.5	Inspection	72
5.2	Drying	19	9.5.1	General Requirements	72
6	DOCUMENTATION	20	9.5.2	Fiber and Cable Inspection	72
6.1	General	20	9.5.3	Optical Component Inspection	72
6.2	Data	20	10	DEFINITIONS AND ACRONYMS	73
6.3	Connector Orientation (Clacking)	20	11	TABLES	85
6.4	Connector Pin-Out	21	APPENDICES	91	
6.5	Dimensioning and Tolerance	21	Appendix A	Space / Military / HAZARDOUS Applications Requirements	93
6.6	Documentation for Maintenance/Emergency Restoration	22	Appendix B	Test Methods for the Initial Testing and Qualification of Optical Fiber, Optical Cable and Associated Devices	103
7	TESTING	22	Appendix C	Verification and Validation Matrix	109

Tables

Table 8-1 Allowable Conditions for Fiber Connectors 25

Table 8-2 Allowable Conditions for Single-Mode Transceivers (With Internal Fiber Stubs) . . .26

Table 8-3 Lensed Device Acceptance Criteria26

Table 11-1 Bend Radius85

Table 11-2 Optical Fiber/Cable Length Measurement/ Tolerance.86

Table 11-3 Magnification Aids (Power = X)86

Table 11-4 Standard Test Conditions87

Table 11-5 Extended Test Conditions87

Table 11-6 Optical Power (Absolute Power and Power Loss)87

Table 11-7 Typical Transmitter Specifications88

Table 11-8 Comparison of LED and LD Transmitter Parameters.88

Table A1 Space / Military / Hazardous Application Requirements93

Figures

Figure 1-1 Optical Fiber Assemblies, Cables And1

Figure 1-2 International Laser Warning Label6

Figure 1-3 Example of a Laser Warning Label Designed for Use in a Fiber Optic Communications Systems (FOCS).7

Figure 3-1 Typical Fiber Optic Cable.13

Figure 5-1 Contamination (Oil and Debris)17

Figure 5-2 Contamination (Before Cleaning).19

Figure 5-3 Contamination (After Cleaning)19

Figure 6-1a Connector Orientation (Clocking) and Mating Face View (Inset) with D38999 Bulkhead Example (Arrow identifies key)21

Figure 6-1b Connector Orientation (Clocking), Example - APC Connector without Dust Cap21

Figure 6-1c Connector Orientation (Clocking), Example - LC Connector without Dust Cap21

Figure 6-1d Connector Orientation (Clocking), Example - MPO Connector without Dust Cap21

Figure 8-1 End Face25

Figure 8-2 End Face26

Figure 8-3 End Face26

Figure 8-4 Connector/Cable Configuration29

Figure 8-5 Connector/Optical Fiber Configuration29

Figure 8-6 Axial Alignment29

Figure 8-7 Cable Alignment/Bend Radius30

Figure 8-8 Fiber Alignment/Bend Radius30

Figure 8-9 Protection Cap (Dust Cap)31

Figure 8-10 Identification/Marker31

Figure 8-11 Scuff Marks.32

Figure 8-12 Pistoning (Fiber).32

Figure 8-13 Routing33

Figure 8-14 Shrinkage (Outer Jacket)33

Figure 8-15 Multimode (Left) and Single-Mode (Right) Fiber Ends33

Figure 8-16 Edge Chips34

Figure 8-17 Hackle.34

Figure 8-18 Scratches.35

Figure 8-19 Crash (Shattered Fiber).35

Figure 8-20 Crack (Surface)36

Figure 8-21 Crack, Surface (Side View)36

Figure 8-22 Crack (Surface)37

Figure 8-23 Necking37

Figure 8-24 Lip38

Figure 8-25 Lip (Side View).38

Figure 8-26 Spiral Cleave.38

Figure 8-27 Breakdown / Roll-Off.39

Figure 8-28 Breakdown / Roll-Off (Side View).39

Figure 8-29 Concave Core40

Figure 8-30 Convex Core40

Figure 8-31 Improper Strip Length41

Figure 8-32 Kinking (Fiber).41

Figure 8-33 Light Leakage (Fiber).42

Figure 8-34 Buffer Shrinkage (Fiber).42

Figure 8-35 Connector/Fiber Configuration.42

Figure 8-36 End Face View (Multimode Fiber).43

Figure 8-37 End Face, Magnified Image (200X)44

Figure 8-38 Scratches – Multiple Sizes, Cladding/ Core Zone (Large Scratch - Cladding Zone; Small Scratches44

Figure 8-39 Scratch - Cladding and Core Zones45

Figure 8-40 Scratches – Multiple Sizes, Cladding/Core Zone46

Figure 8-41 Core Damage47

Figure 8-42 Crash47

Figure 8-43 Coarse Finish (Polish/Handling).48

Figure 8-44 Contamination Particles and Fibers Located in Contact Zone.48

Figure 8-45 Severe Chipping and Pitting in Cladding Zone, Extending into Core Zone	49	Figure 8-66 Surface Distortion (Fusion Splice)	59
Figure 8-46 Particle Located in Core Zone	49	Figure 8-67 Alcohol Residue	60
Figure 8-47 Multiple Particles Located In Cladding Zone	50	Figure 8-68 Angular Misalignment of Fibers (Fusion Splice)	60
Figure 8-48 Oil/Liquid Residue	50	Figure 8-69 Boundary Layer/Diffraction Zone (Fusion Splice)	61
Figure 8-49 Crash (Severe Cladding and Core Damage)	51	Figure 8-70 Bubbles (Fusion Splice)	61
Figure 8-50 Surface Cracks and Chips Extending into Core Zone	51	Figure 8-71 Core Mismatch (Fusion Splice)	62
Figure 8-51 Contamination / Voids / Cavities in the Adhesive Zone	52	Figure 8-72 Lateral Offset (Misalignment) of Fibers (Fusion Splice)	62
Figure 8-52 Multiple Particles Located in Cladding Zone	52	Figure 8-73 Mechanical Splice (Assembled)	63
Figure 8-53 Multifiber Termination, Fiber Contamination	53	Figure 8-74 Bubbles in Index-Matching Gel (Mechanical Splice)	63
Figure 8-54 Adhesive Residue	53	Figure 8-75 Fiber End Face Separation (Mechanical Splice)	63
Figure 8-55 Example of a Lensed and Fiber Stub Device	54	Figure 8-76 Splice Closure/Protector	64
Figure 8-56 Lens End Face View (10X Magnification)	54	Figure 8-77 Butterfly Splice Closure/Protector	64
Figure 8-57 Fiber Stub End Face (10X Magnification)	55	Figure 8-78 Heat Shrink Splice Closure/Protector (Assembled Fusion Splice)	64
Figure 8-58 Fiber Stub End Face (200X magnification)	55	Figure 8-79 Strain Member	65
Figure 8-59 Crack Across Viewing Area and Lens	56	Figure 8-80 Strain Member (Protruding Fibers)	65
Figure 8-60 Crash (Severe Surface Abrasion)	56	Figure 8-81 Strain-Relief Device (Boot)	66
Figure 8-61 Crash (Severe Chipping)	57	Figure 8-82 Missing Strain-Relief Boot	66
Figure 8-62 Contamination	57	Figure 8-83 Improperly Installed Strain-Relief Boot	67
Figure 8-63 Scratch	57	Figure 8-84 Example of Undamaged Insulation Jacket	67
Figure 8-64 Chemical Splice (Assembled)	58	Figure 8-85 Acceptable Mechanical/Thermal Damage	67
Figure 8-65 Fusion Splice	59	Figure 8-86 Unacceptable Mechanical/Thermal Damage	67

Acceptance Requirements for Optical Fiber, Optical Cable, and Hybrid Wiring Harness Assemblies

1 GENERAL

1.1 Scope This standard provides acceptance requirements and technical insight that have been removed from acceptance standards for cable and wire harness assemblies incorporating optical fiber, optical cable and hybrid wiring technology. Reference materials listed in this text are among those considered as required reading. The User is encouraged to obtain all relevant reference materials, as this document cannot (nor can any single document) cover every material, process, environment, performance, or safety aspect that affect a given design.

1.2 Purpose This standard is intended to provide information on design and acceptance requirements for optical fiber, optical cable, hybrid wiring harness assemblies and fiber optic communications systems (FOCS) to the extent that they can be applied to the broad spectrum of optical cable and wiring harness design.

Neither this document nor its Appendices provide detailed procedures for the test, acceptance, commissioning and /or maintenance of FOCS.

This document is intended for use by the design engineer, manufacturing engineer, quality engineer or other individual(s) responsible for tailoring specific requirements of this document to the applicable performance class.

- a. This document defines acceptability criteria and limits for “New/Beginning of Life” hardware. It is not the intent of this document to establish or define “In Service” acceptance criteria to address performance or reliability issues caused by aging or use. However, the acceptability criteria and limits that are detailed in this document may be considered to be wide enough to be applicable to the more common hardware degradation conditions caused by aging/use. Use of these criteria for acceptance of “In Service” hardware conditions **shall [D1D2D3]** be as agreed between User and Supplier (AABUS).
- b. It is not the intent of this document to exclude any alternate documents or processes that meet or exceed the baseline requirements established by this document. Use of alternate documents or processes **shall [D1D2D3]** require review and prior approval of the User.
- c. For purposes of this document:
 - 1) The Designer is the design agent for the User.
 - 2) The User is the individual, organization, company, contractually designated authority, or agency responsible for the procurement or design of electrical/electronic/electromechanical (EEE) hardware, and having the authority to define the class of product and any variation or restrictions to the requirements of this document (e.g., the originator/custodian of the contract detailing these requirements). The User is considered the Design Authority.
 - 3) The Supplier is considered the individual, organization or company which provides the Manufacturer (assembler) components (e.g., electrical, electronic, electromechanical, mechanical, printed boards) and/or materials (e.g., solder, flux, cleaning agents).
 - 4) The Manufacturer is considered the entity that provides a service or product to the User.

Note: In some instances, the Manufacturer may also be considered the Supplier to the User.

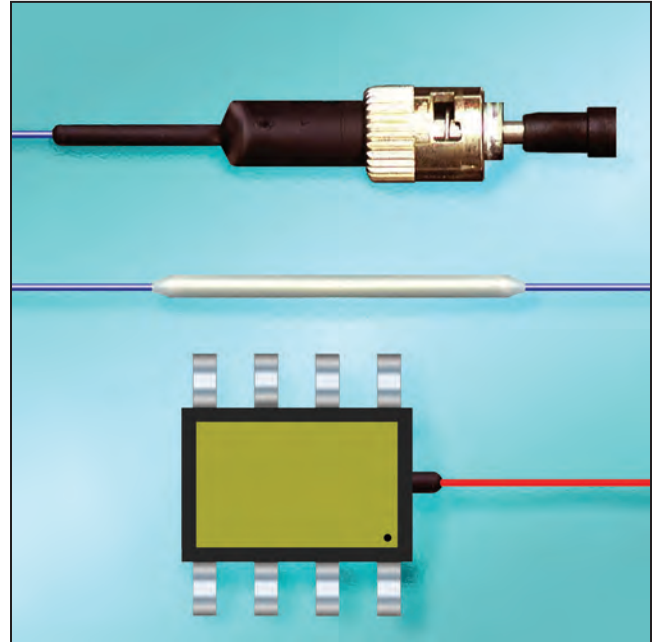


Figure 1-1 Optical Fiber Assemblies, Cables And Wiring Harnesses Connector, Splice and Transmitter
Image credit: NASA