

IPC J-STD-030
SEPTEMBER 2005

JOINT INDUSTRY STANDARD

Guideline for Selection
and Application
of Underfill Material
for Flip Chip and
Other Micropackages



The Principles of Standardization

In May 1995 the IPC's Technical Activities Executive Committee (TAEC) adopted Principles of Standardization as a guiding principle of IPC's standardization efforts.

Standards Should:

- Show relationship to Design for Manufacturability (DFM) and Design for the Environment (DFE)
- Minimize time to market
- Contain simple (simplified) language
- Just include spec information
- Focus on end product performance
- Include a feedback system on use and problems for future improvement

Standards Should Not:

- Inhibit innovation
- Increase time-to-market
- Keep people out
- Increase cycle time
- Tell you how to make something
- Contain anything that cannot be defended with data

Notice

IPC Standards and Publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such Standards and Publications shall not in any respect preclude any member or nonmember of IPC from manufacturing or selling products not conforming to such Standards and Publication, nor shall the existence of such Standards and Publications preclude their voluntary use by those other than IPC members, whether the standard is to be used either domestically or internationally.

Recommended Standards and Publications are adopted by IPC without regard to whether their adoption may involve patents on articles, materials, or processes. By such action, IPC does not assume any liability to any patent owner, nor do they assume any obligation whatever to parties adopting the Recommended Standard or Publication. Users are also wholly responsible for protecting themselves against all claims of liabilities for patent infringement.

IPC Position Statement on Specification Revision Change

It is the position of IPC's Technical Activities Executive Committee that the use and implementation of IPC publications is voluntary and is part of a relationship entered into by customer and supplier. When an IPC publication is updated and a new revision is published, it is the opinion of the TAEC that the use of the new revision as part of an existing relationship is not automatic unless required by the contract. The TAEC recommends the use of the latest revision. Adopted October 6, 1998

Why is there a charge for this document?

Your purchase of this document contributes to the ongoing development of new and updated industry standards and publications. Standards allow manufacturers, customers, and suppliers to understand one another better. Standards allow manufacturers greater efficiencies when they can set up their processes to meet industry standards, allowing them to offer their customers lower costs.

IPC spends hundreds of thousands of dollars annually to support IPC's volunteers in the standards and publication development process. There are many rounds of drafts sent out for review and the committees spend hundreds of hours in review and development. IPC's staff attends and participates in committee activities, typesets and circulates document drafts, and follows all necessary procedures to qualify for ANSI approval.

IPC's membership dues have been kept low to allow as many companies as possible to participate. Therefore, the standards and publications revenue is necessary to complement dues revenue. The price schedule offers a 50% discount to IPC members. If your company buys IPC standards and publications, why not take advantage of this and the many other benefits of IPC membership as well? For more information on membership in IPC, please visit www.ipc.org or call 847/597-2872.

Thank you for your continued support.



ASSOCIATION CONNECTING
ELECTRONICS INDUSTRIES®

IPC J-STD-030

Guideline for Selection and Application of Underfill Material for Flip Chip and Other Micropackages

Developed by the Underfill Adhesives for Flip Chip Applications Task
Group (5-24f) of the Assembly and Joining Processes Committee (5-20)

Users of this publication are encouraged to participate in the
development of future revisions.

Contact:

IPC
3000 Lakeside Drive, Suite 309S
Bannockburn, Illinois
60015-1219
Tel 847 615.7100
Fax 847 615.7105

This Page Intentionally Left Blank

Acknowledgment

Any document involving a complex technology draws material from a vast number of sources. While the principal members of the Underfill Adhesives for Flip Chip Applications Task Group (5-24f) of the Assembly and Joining Processes Committee (5-20) are shown below, it is not possible to include all of those who assisted in the evolution of this standard. To each of them, the members of the IPC extend their gratitude.

Assembly & Joining Processes Committee

Chairman
James F. Maguire
Intel Corporation

Vice Chairman
Leo P. Lambert
EPTAC Corporation

Underfill Adhesives for Flip Chip Applications Task Group

Chairman
Brian J. Toleno, Ph.D.
Henkel Corporation

Technical Liaisons of the IPC Board of Directors

Peter Bigelow
IMI Inc.

Sammy Yi
Flextronics International
Rockwell

Underfill Adhesives for Flip Chip Applications Task Group

Steve Adamson, Asymtek	Joe Fjelstad, Silicon Pipe, Inc.	David R. Johnson, Raytheon Company
Victor J. Barba, Endicott Interconnect Technologies Inc	Ken Gilleo, Ph.D., ET-Trends LLC	Bruce Oberer, Raytheon Company
Vic Beldavs, GE Healthcare	Constantino J. Gonzalez, ACME Training & Consulting	Eric Sing Ong, Cookson Electronics
John Bova, Precision Valve & Automation	Hue T. Green, Lockheed Martin Space Systems Company	Douglas O. Pauls, Rockwell Collins
Alan M. H. Brewin, National Physical Laboratory	Robert H. Hoffman, Asymtek	Ajith Premasiri, Amtech, Inc.
Rich Bushman, 3M Company	Kuan-Shaur Lei, Hewlett-Packard Company	Michael A. Previti, Cookson Electronics
George Carson, Ph.D., Henkel Corporation	Karl I. Loh, Zymet, Inc.	James E. Rausch, Delphi Electronics and Safety
Marc Carter, RBP Chemical Technology, Inc.	Daniel J. Loskot, Henkel Corporation	John H. Rohlfling, Delphi Electronics and Safety
Phillip Chen, L-3 Communications Electronic Systems	Kenneth Manning, Raytheon Company	David F. Scheiner, Kester
Wennei Chen, Northrop Grumman	Steven P. Mottell, Sonoscan Inc.	Jeff Shubrooks, Raytheon Company
Michael G. Firmstone, Thermoset - Lord Chemical Products	James Miradeo, AI Technologies, Inc.	Karen A. Tellefsen, Ph.D., Cookson Electronics
	Neil Murray, TRW/Automotive Electronics Group	Wesley W. Walters, Asymtek
		Fonda B. Wu, Raytheon Company
		Sarah F. Zarrin, Seagate Technology

This Page Intentionally Left Blank

Currently in preview, click buy full version

Table of Contents

1 SCOPE	1	7.2 Storage Conditions	11
1.1 Introduction	1	7.3 Preconditioning	11
1.2 Purpose	1	7.4 Pot Life	11
2 APPLICABLE DOCUMENTS	1	7.4.1 Viscosity Change	11
2.1 IPC	1	7.4.2 Flow Rate Change	11
2.2 Joint Industry Standard	2	7.4.3 Settling Test	11
2.3 American Society for Testing and Materials (ASTM)	2	8 APPLICATION PROCESS	11
2.4 Telcordia Technologies, Inc.	2	8.1 Preapplication Substrate Preparation	12
3 TERMS AND DEFINITIONS	2	8.2 Application of Capillary Flow Underfill	12
4 BACKGROUND	2	8.2.1 Dispensing Procedures	12
4.1 Why Is Underfill Needed?	2	8.2.1.1 Dispensing Patterns	12
4.2 Types of Underfill	3	8.2.1.2 Process Parameters	13
4.2.1 Capillary Underfill	3	8.2.2 Application Problems	13
4.2.2 Fluxing (No-Flow) Underfill	4	8.2.2.1 Air Entrapment	13
4.2.3 Removable/Reworkable Underfill	4	8.2.2.2 Gravitational Phase Separation	14
4.2.4 Molded Underfill	4	8.2.2.3 Dynamic Phase Separation	14
4.2.5 Preapplied Underfill	4	8.2.2.4 Flooding Phase Separation	14
5 DESIGN CONSIDERATIONS	5	8.3 Application of No-Flow/Fluxing Underfill	14
5.1 Footprint Design	5	8.3.1 Dispensing Pattern	14
5.2 Gap Size	6	8.3.2 Dispense Volume	14
5.3 Pad Redistribution	6	8.3.3 Die Placement	14
6 UNCURED UNDERFILL CHARACTERISTICS	6	8.3.4 Application Problems	15
6.1 Filler Properties	6	8.4 Flow Rate	15
6.1.1 Filler Size	7	8.4.1 Dispense Flow Rate Measurement	15
6.1.2 Filler Material Type	7	8.4.2 Underfill Flow Rate	15
6.1.3 Percent by Weight	7	8.4.3 Flow-Out and Bleed	15
6.1.4 Density	7	8.5 Spread/Slump	16
6.2 Prepolymer Properties	7	8.6 Evaluation Methodology	16
6.2.1 Viscosity	7	8.6.1 Acoustic Micro-Imaging	16
6.2.2 Gel Time	8	8.6.2 Assembly to Glass for Flow Visualization	16
6.3 Material Compatibility	8	8.7 Pot Life (In Dispenser)	17
6.3.1 Flux Compatibility	8	9 CURE PROCESS	17
6.3.2 Board Surface Compatibility	9	9.1 Applied Life (After Dispensing)	17
6.3.3 Component Surface Compatibility	10	9.2 Cure Process for Capillary Flow Underfill	17
6.4 Alpha Particle Emissions	10	9.2.1 Process Parameters	17
7 MATERIALS PACKAGING, HANDLING AND STORAGE	10	9.2.2 Cure Schedule	17
7.1 Packaging	10	9.2.3 Heating Rate	18
7.1.2 Containers	10	9.2.4 Temperature Sensitivity	18
7.1.3 Voids/Bubbles in Packed Material	10	9.3 Cure Process for No-Flow Underfill	18
		9.4 Void Formation/Outgassing	18
		9.5 Cure Verification	19
		10 CURED UNDERFILL CHARACTERISTICS	19

Guideline for Selection and Application of Underfill Material for Flip Chip and other Micropackages

1 SCOPE

This document provides users of underfill material with guidance in selecting and evaluating underfill material. Underfill material is used to increase reliability of electronic devices by two methods: alleviate CTE mismatch (between the electronic package and the assembly substrate) and/or increase mechanical strength. Materials used in underfill applications should not adversely affect device reliability (e.g., ionic impurities, alpha emitters) nor degrade electrical performance. When correctly selected and applied, underfill material should increase the life of the assembled solder joints.

Types of underfill materials currently available in the market include:

- Capillary Flow Underfill
- No-Flow/Fluxing Underfill
- Removable/Reworkable Underfill
- Molded Underfill (not within scope of document)
- Wafer Applied Underfill (not within scope of document)

1.1 Introduction This guideline covers polymer based underfill materials intended for use in electronic packaging assembly applications to relieve stress on joints that interconnect flip chips (FC), chip scale packages (CSP) and ball grid arrays (BGA) to an interconnecting substrate (see figure 1-1).

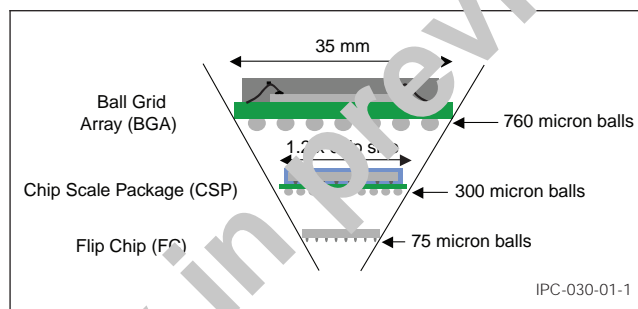


Figure 1-1 Comparison of Various Sized Array Packages

1.2 Purpose The purpose of this document is to help in identifying underfill materials whose properties are compatible with component assembly joints to reduce thermo-mechanical stress so that performance of the assembly is enhanced. The additional role of underfill is protecting the device from environmental factors and increasing strength. Materials used in underfill applications should not

adversely affect device reliability (no ionic impurities and no alpha emitters) nor degrade electrical performance. Evaluation methods are provided in the document that are intended to be used for assessing underfill material performance in specific applications as well as troubleshooting failures and how to avoid failures. This document represents the compiled knowledge and experience of the IPC Underfill Adhesives for Flip Chip Application Task Group.

2 APPLICABLE DOCUMENTS

2.1 IPC¹

IPC-T-50 Terms and Definitions for Interconnecting and Packaging Electronic Circuits

IPC-TM-650 Test Methods Manual²

2.3.18 Cure Time, Prepreg Materials

2.4.28 Adhesion, Solder Mask (Non-Melting Metals)

2.4.34.1 Solder Paste Viscosity - T-Bar Spindle Method (Applicable at Less Than 300,000 Centipose)

2.4.34.3 Solder Paste Viscosity - Spiral Pump Method (Applicable at Less Than 300,000 Centipose)

2.4.34.4 Paste Flux Viscosity - T-Bar Spindle Method

2.6.1 Fungus Resistance Printed Wiring Materials

2.6.3.1 Moisture and Insulation Resistance - Solder Mask

2.6.3.2 Moisture and Insulation Resistance, Flexible Base Dielectric

2.6.3.3 Surface Insulation Resistance, Fluxes

2.6.14.1 Electrochemical Migration Resistance Test

IPC-SM-782 Surface Mount Design and Land Pattern Standard

IPC-SM-785 Guidelines for Accelerated Reliability Testing of Surface Mount Solder Attachments

IPC-SM-840 Qualification and Performance of Permanent Solder Mask

IPC-9201 Surface Insulation Resistance Handbook

1. www.ipc.org

2. Current and revised IPC Test Methods are available on the IPC website (www.ipc.org/html/testmethods.htm).