



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA F101-19
(Revision of ANSI/AWWA F101-13)

AWWA Standard

Contact-Molded, Fiberglass- Reinforced Plastic Wash-Water Troughs and Launders

Effective date: June 1, 2019.

First edition approved by AWWA Board of Directors Jan. 23, 1991.

This edition approved Jan. 24, 2019.

Approved by American National Standards Institute Feb. 22, 2019.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900, or emailing info@ansi.org.

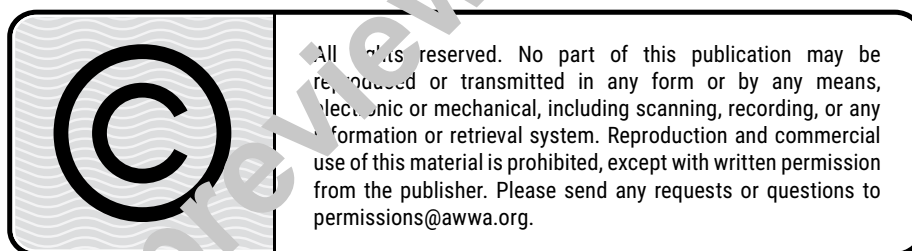

ISBN-13, print: 978-1-62576-344-0

eISBN-13, electronic: 978-1-61300-516-3

DOI: <http://dx.doi.org/10.12999/AWWA.F101.19>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2019 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Committee on Fiberglass Weirs, Troughs, and Baffles, which reviewed and approved this standard, had the following personnel at the time of approval:

Justin Reeves, *Chair*

General Interest Members

G.M. Jones, Columbia Falls, Mont.

J.W. Green,* Standards Council Liaison, Lockwood, Andrews & Newnam Inc., Oakbrook Terrace, Ill.

J.C. Reeves, Lockwood, Andrews & Newnam Inc., Fort Worth, Tex.

E. Meek,* Standards Engineer Liaison, AWWA, Denver, Colo.

Producer Members

P.A. Merimee, MFG Construction and Water Treatment Products, Union City, Pa.

E.G. Renz, Warminster Fiberglass Co., Southampton, Pa.

D. Vorse,† MFG Construction and Water Treatment Products, Union City, Pa.

User Members

S. Ali, Detroit Water & Sewerage Dept., Capital Management Group, Detroit, Mich.

J.B. Pagenkopp, Metropolitan Water District of Southern California, La Verne, Calif.

W.A. Sleeper,† Metropolitan Water District of Southern California, La Verne, Calif.

J.S. Taylor, City of Tyler, Tyler, Tex.

* Liaison, non-voting

† Alternate

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword		4.3	Laminate Construction and Design ... 6
I	Introduction..... vii	4.4	Chemical and Physical Requirements 14
I.A	Background..... vii	5	Verification
I.B	History..... vii	5.1	Sample Specimens 14
I.C	Acceptance vii	5.2	Production Testing 14
II	Special Issues ix	5.3	Inspection 14
III	Use of This Standard..... ix	5.4	Notice of Performance..... 15
III.A	Purchaser Options and Alternatives ... ix	6	Delivery
III.B	Modification to Standard x	6.1	Marking 15
IV	Major Revisions..... x	6.2	Packing and Shipping..... 15
V	Comments x	6.3	Affidavit of Compliance 16
Standard		Tables	
1	General	1	Minimum Physical Properties of Laminates..... 5
1.1	Scope..... 1	2	Gel-Coat Properties..... 7
1.2	Purpose 2	3	Conditions Requiring Wall-to-Wall Lateral Stabilizers for Water Backwash with Agitator and Effluent Launderers with V-Notch or Submerged Orifices 9
1.3	Application..... 2	4	Conditions Requiring Wall-to-Wall Lateral Stabilizers for Air-Scour Backwash Systems 9
2	References 2	5	Standard Trough and Launder Dimensions..... 11
3	Definitions 3	6	Allowable Cosmetic Defects 12
4	Requirements		
4.1	Information to Be Supplied by the Manufacturer 4		
4.2	Materials 4		

Foreword

This foreword is for information only and is not a part of ANSI/AWWA F101.*

I. Introduction.

I.A. *Background.* The purpose of this standard is to establish the minimum quality requirements for contact-molded, fiberglass-reinforced, thermoset resin wash-water troughs and launders for use in municipal and industrial water treatment plants. The troughs or launders are intended for use in treatment basins or tanks. However, the specific application must consider the limitations specified under Sec. 1.1, and information must be provided by the purchaser to completely describe the fabrication requirements. Purchaser-specific information that should be considered is summarized in the foreword, Sec. III.A. The purchaser should review these recommendations and other appropriate data and make provisions in the purchaser's documents to describe the specific service requirements.

I.B. *History.* In 1986, the American Water Works Association (AWWA) Standards Council authorized the development of AWWA standards to describe contact-molded, fiberglass-reinforced, thermoset resin wash-water troughs and launders. Beginning in 1987, with preliminary, unfinished standards developed by an earlier American Society for Testing and Materials (ASTM, now ASTM International) group, the AWWA Standards Committee on Fiberglass Weirs, Troughs, and Baffles formulated and reviewed several drafts of this final standard. The AWWA Standards Committee on Fiberglass Weirs, Troughs, and Baffles prepared ANSI/AWWA F101 and completed work on the first edition of this standard titled AWWA Contact-Molded, Fiberglass-Reinforced Plastic Wash Water Troughs and Launders. The final draft was submitted to the committee for letter ballot voting on Aug. 23, 1990, and a consensus for acceptance was received. The first edition of the standard was approved by the AWWA Board of Directors on Jan. 23, 1991. Subsequent editions of this standard were approved by the AWWA Board of Directors on June 23, 1996; Jan. 20, 2002; Jan. 21, 2007; and Jan. 20, 2013. This edition was approved on Jan. 24, 2019.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF)

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF,† NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,‡ and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdiction. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA F-101 does not address additives requirements. Thus, users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

* Persons outside the United States should contact the appropriate authority having jurisdiction.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

‡ Both publications available from National Academy of Sciences, 500 Fifth Street NW, Washington, DC 20001.

II. Special Issues. This standard has no applicable information for this section.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. Purchaser Options and Alternatives. The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA F101, Contact-Molded, Fiberglass-Reinforced Plastic Wash-Water Troughs and Launderers, of latest revision.
2. Whether compliance with NSF/ANSI 61, Drinking Water System Components—Health Effects, is required, in addition to the requirements of the Safe Drinking Water Act.
3. Trough or launder flow capacity.
4. Dimensional and weight limitations.
5. Water quality (such as expected pH and temperature ranges) and materials present in the water (including chemical and biological constituents) with which the fabrications will be in contact.
6. Range of normal operating and extreme ambient temperatures anticipated during storage, project construction, maintenance, or other dewatered conditions.
7. Fittings, clearances, and attachment methods to be used and their requirements.
8. Type of installation.
9. Operating conditions.
10. Whether a fire-retardant additive is required. The purchaser may desire plastic fabrications to include a fire-retardant additive to protect against flame spread and smoke propagation during storage, plant construction, and other conditions when basins are dewatered. The purchaser should recognize that these fabrications may be more costly, availability may be more limited, and NSF or other certifications for products in contact with drinking water may not be possible.
11. Fabrication classification (Sec. 1.1.1).
12. Whether certified drawings are to be provided (Sec. 4.1).
13. Details of federal, state, and local requirements (Sec. 4.2).
14. Color and aesthetic treatments (Sec. 4.2.2.1(b)).
15. Whether ultraviolet stabilizers are required (Sec. 4.2.3).
16. Loading conditions and design criteria for the fabrications (Sec. 4.3.2).
17. Specimens to be provided by the manufacturer (Sec. 5.1).

18. Tests to be performed by the manufacturer (Sec. 5.2).
19. Retest agreement requirements (Sec. 5.2.3).
20. Whether plant inspection is required (Sec. 5.3).
21. In the event that materials or products fail to conform to the requirements of this standard, the assignment of cost for replacement should be addressed (Sec. 5.4).
22. Whether a guarantee statement is to be placed on the final product (Sec. 6.1.2).
23. Whether an affidavit of compliance is to be provided (Sec. 6.3).

III.B. *Modification to Standard.* Any modifications to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. Major Revisions. No major revisions were made in this edition of the standard.

V. Comments. If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.94.7111, FAX at 303.795.7603, write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098, or email at standards@awwa.org.



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA F101-19
(Revision of ANSI/AWWA F101-13)

AWWA Standard

Contact-Molded, Fiberglass- Reinforced Plastic Wash-Water Troughs and Launderers

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes the minimum requirements for fiberglass-reinforced plastic wash-water troughs and launders made by the contact-molding process, including flat-bottom, round-bottom, and V-bottom troughs and launders. Requirements are included for materials, properties, design, construction, dimension tolerances, work quality, and appearance. This standard also describes the requirements for using general-purpose and chemical-resistant resins. These fabrications are generally used in municipal water supply service and industrial water supply service applications.

1.1.1 *Classification.* Resistance to the corrosive or chemical environment shall be determined before molding either Type I or Type II fabrications. Typically, municipal water supply service applications use Type I, while industrial water supply service applications may use either Type I or Type II, depending on the environment. Troughs and launders shall be classified according to type as follows:

1.1.1.1 Type I. Fabrications shall be manufactured with a polyester resin of the orthophthalic or isophthalic formulation. Type I fabrications shall