

# ANSI B11.26–2024

*American National Standard for Machines –*

## **Functional Safety:**

General Principles for Designing  
Safety–Related Parts of  
Control Systems for Machinery

ANSI-Accredited Standards Developer and Secretariat:



B11 Standards, Inc.  
Houston, Texas, USA  
[www.b11standards.org](http://www.b11standards.org)

**APPROVED: 6 NOVEMBER 2024**

by the American National Standards Institute  
Board of Standards Review



**COPYRIGHT PROTECTED DOCUMENT**

Copyright © 2024 by B11 Standards, Inc.

All rights reserved. Printed in the United States of America. No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of B11 Standards, Inc.

## AMERICAN NATIONAL STANDARDS

By approving this American National Standard, the ANSI Board of Standards Review confirms that the requirements for due process, consensus, balance and openness have been met by B11 Standards, Inc. (the ANSI-accredited standards developing organization).

American National Standards are developed through a consensus process. Consensus is established when substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made toward resolution. This process brings together volunteers and/or seeks out the views of people who have an interest in the topic covered by this publication. While B11 Standards, Inc. administers the process and establishes procedures to promote fairness in the development of consensus, it does not write the document and it does not independently test, evaluate or verify the accuracy or completeness of any information or the soundness of any judgments contained in its standards or guidelines.

American National Standards are promulgated through ANSI for voluntary use; their existence does not in any respect preclude anyone, whether they have approved the standards or not, from manufacturing, marketing, purchasing or using products, processes, or procedures not conforming to the standards. However, users, distributors, regulatory bodies, certification agencies and others concerned may apply American National Standards as mandatory requirements in commerce and industry.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of an American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the Secretariat (B11 Standards, Inc.).

B11 STANDARDS, INC. MAKES NO WARRANTY, EITHER EXPRESSED OR IMPLIED AS TO THE FITNESS OF MERCHANTABILITY OR ACCURACY OF THE INFORMATION CONTAINED WITHIN THIS STANDARD AND DISCLAIMS AND MAKES NO WARRANTY THAT THE INFORMATION IN THIS DOCUMENT WILL FULFILL ANY OF YOUR PARTICULAR PURPOSES OR NEEDS. B11 STANDARDS, INC. DISCLAIMS LIABILITY FOR ANY PERSONAL INJURY, PROPERTY OR OTHER DAMAGES OF ANY NATURE WHATSOEVER, WHETHER SPECIAL, INDIRECT, CONSEQUENTIAL OR COMPENSATORY, DIRECTLY OR INDIRECTLY RESULTING FROM THE PUBLICATION, USE OF, APPLICATION OR RELIANCE ON THIS DOCUMENT. B11 STANDARDS, INC. DOES NOT UNDERTAKE TO GUARANTEE THE PERFORMANCE OF ANY INDIVIDUAL MANUFACTURER OR SELLER'S PRODUCTS OR SERVICES BY VIRTUE OF THIS STANDARD OR GUIDE, NOR DOES IT TAKE ANY POSITION WITH RESPECT TO THE VALIDITY OF ANY PATENT RIGHTS ASSERTED IN CONNECTION WITH THE ITEMS WHICH ARE MENTIONED IN OR ARE THE SUBJECT OF THIS DOCUMENT. B11 STANDARDS, INC. DISCLAIMS LIABILITY FOR THE INFRINGEMENT OF ANY PATENT RESULTING FROM THE USE OF OR RELIANCE ON THIS DOCUMENT. USERS OF THIS DOCUMENT ARE EXPRESSLY ADVISED THAT DETERMINATION OF THE VALIDITY OF ANY SUCH PATENT RIGHTS, AND THE RISK OF INFRINGEMENT OF SUCH RIGHTS, IS ENTIRELY THEIR OWN RESPONSIBILITY.

In publishing or making this document available, B11 Standards, Inc. is not undertaking to render professional or other services for or on behalf of any person or entity, nor does B11 Standards, Inc. undertake to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment, or as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

B11 Standards, Inc. has no power, nor does it undertake to police or enforce conformance to the requirements of this document. B11 Standards, Inc. does not certify, test or inspect products, designs, or installations for safety or health purposes. Any certification or other statement of conformance to any health or safety-related information in this document shall not be attributable to B11 Standards, Inc. and is solely the responsibility of the certifier or maker of the statement.

NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. You may contact the Secretariat for current status information on this, or other B11 standards.

Published by:

B11 Standards, Inc.  
Houston TX 77069 USA  
www.b11standards.org

Copyright © 2024 by B11 Standards, Inc. All rights reserved. Printed in the United States of America

TABLE OF CONTENTS PAGE

Foreword (The Foreword is NOT a normative part of ANSI B11.26-2024) ..... 12

Introduction & Overview of the ANSI B11 Series of Machinery Safety Standards ..... 15

1 Scope ..... 18

2 References ..... 18

    2.1 Normative References ..... 18

    2.2 Informative References ..... 18

3 Definitions ..... 19

    3.17 emergency stop: The stopping of a machine, manually initiated, for emergency purposes. .... 20

    3.18 engineering controls: Guards or devices and associated safety-related parts of the control system (SRP/CS) used to reduce risk. See ANSI B11.19 ..... 20

4 How to Use ANSI B11.26 ..... 26

    4.1 Circuit Examples and Analysis Tables ..... 26

    4.2 Circuit Analysis Tables ..... 27

5 Preparations for Functional Safety Design ..... 28

    5.1 Conduct a Risk Assessment (per ANSI B11.0) ..... 28

    5.2 Identify Risk Reduction Measures that Involve the SRP/CS ..... 29

    5.3 Define the Safety Function ..... 29

    5.4 Determine the Reliability Design Specification for Each Circuit ..... 30

        5.4.1 Categories ..... 31

            5.4.1.1 Architecture ..... 31

            5.4.1.2 Diagnostic Coverage (DC) ..... 32

            5.4.1.3 Common Cause Failure (CCF) ..... 32

            5.4.1.4 Category design considerations ..... 32

        5.4.2 Performance Level (PL) Methodology (ISO 13849-1) ..... 33

            5.4.2.1 General ..... 33

            5.4.2.2 Select Components ..... 33

            5.4.2.3 Fault considerations ..... 33

            5.4.2.4 Diagnostic Coverage (DC) ..... 33

            5.4.2.5 Common Cause Failure (CCF) ..... 34

            5.4.2.6 Calculating a PL ..... 34

        5.4.3 Safety integrity level (SIL) ..... 34

    5.5 Define Basic Input Logic and Output Elements Required ..... 34

        5.5.1 Inputs ..... 35

        5.5.2 Logic ..... 35

        5.5.3 Outputs ..... 35

6 General Design Requirements ..... 36

    6.1 Integration of SRP/CS in the Overall Machine Controls ..... 36

        6.1.1 Typical Non-Safety Control Components Augmented by SRP/CS Components to Achieve Safety-Related Functions ..... 36

    6.2 Specific Functions ..... 37

        6.2.1 Protective Stop ..... 37

        6.2.2 Start Function ..... 37

    6.3 Electrical Design Requirements ..... 37

        6.3.1 Opening of Circuits for Time Dependent Functions ..... 37

        6.3.2 Positive/Negative Logic ..... 37

        6.3.3 Interfacing SRP/CS with Non-Safety PES/PLC ..... 38

        6.3.4 Electro-Mechanical Contact Requirements ..... 38

    6.4 Fluid Power (Pneumatics and Hydraulics) Design Requirements ..... 38

        6.4.1 Protective Stops in Fluid Power Systems ..... 39

        6.4.2 Reset Function of Safety Valves ..... 39

        6.4.3 Reapplication of Pressure ..... 39

6.4.4	Fluid Power Valve Crossover .....	39
6.5	Mechanical design requirements.....	39
6.5.1	Design Requirements.....	40
6.5.2	Design Considerations .....	40
6.5.2.1	General Information .....	40
7	Fault Consideration .....	41
7.1	Common Cause Failure .....	41
7.2	Fault Exclusion .....	41
7.3	Electrical Failure Modes .....	41
7.4	Fluid Power Failure Modes .....	42
7.4.1	General Failure Modes .....	42
7.4.2	Pneumatic Failure Modes .....	43
7.4.3	Hydraulic Failure Modes .....	44
7.4.4	Avoiding an overly complex design .....	45
7.5	Mechanical failure modes .....	45
7.5.1	Tampering / Defeat .....	45
7.5.2	Failure Modes.....	45
8	Monitoring / Diagnostic Coverage .....	46
8.1	Electrical Monitoring / Diagnostic Coverage Methods .....	46
8.1.1	Input Masking on Series Connected Devices .....	46
8.2	Fluid Power Monitoring / Diagnostic Coverage Methods .....	47
8.2.1	Direct monitoring.....	47
8.2.2	Indirect monitoring.....	47
8.2.3	Monitoring by the process.....	47
8.2.4	Monitoring of three position valves.....	47
8.2.5	Monitoring of response time .....	47
9	Design Requirements – Input Devices (Engineering Control – Devices) .....	48
9.1	Emergency Stop Devices.....	48
9.1.1	Design Requirements.....	48
9.1.2	Design Considerations .....	48
9.1.2.1	Tampering / Defeat .....	48
9.1.2.2	Failure Modes .....	48
9.1.3	Application Examples .....	49
9.1.3.1	Single Channel E-stop Using a Control Relay (Category 1) .....	49
9.1.3.2	Dual Channel E-stop Using Redundant Control Relays (Category 2) 50	50
9.1.3.3	Dual Channel E-Stop Using Force-Guided Relays (FGR) and Cross Monitoring (Category 3).....	51
9.1.3.4	Multiple Dual Channel E-Stop with a Safety Interface Module (SIM)(Category3).....	52
9.1.3.5	Single Button Dual Channel E-stop with a SIM (Category 4).....	53
9.1.3.6	Single Button Dual Channel E-stop w/ Self-Monitoring and a SIM (Category 4).....	54
9.2	Mechanical (Contacting) Interlocking Devices .....	54
9.2.1	Design Requirements.....	54
9.2.2	Design Considerations .....	55
9.2.2.1	General Information.....	55
9.2.3	Application Examples .....	58
9.2.3.1	Basic Interlocked Guard Circuit (Category B) .....	58
9.2.3.2	Interlocked Guard Circuit – Single Channel (Category 1) .....	59
9.2.3.3	Interlocked Guard Monitoring – Single Channel w/ a SIM and PES (Category 2).....	60
9.2.3.4	Single Interlock to a SIM (Category 3) .....	61
9.2.3.5	Series Connection of Interlocks to a SIM (Category 3) .....	62
9.2.3.6	Interlocked Guard Monitoring – Dual Channel w/ Relay/Contactor and Reset Button (Category 4).....	63

9.2.3.7 Interlocked Guard Monitoring – Dual Channel w/ a SIM (Category 4)  
64

9.2.3.8 Control Interlocking using Trapped Key Interlocking Systems ..... 65

9.2.3.9 Prevention of unexpected start-up using a Trapped Key Interlocking System..... 66

9.2.3.10 Single access control procedure using a Trapped Key Interlocking System..... 67

9.2.3.11 Access control using a Trapped Key Interlocking System including key exchange..... 69

**9.3 Non-Contact Interlocking Devices ..... 69**

**9.3.1 Design Requirements..... 69**

**9.3.2 Design Considerations ..... 70**

**9.3.3 Application Examples ..... 70**

9.3.3.1 Description of Non-Contact Interlocking Devices ..... 70

9.3.3.2 Inductive Switches ..... 70

9.3.3.3 Optical Switches ..... 70

9.3.3.4 Magnetic Switches..... 70

9.3.3.5 Transponder Switches ..... 70

9.3.3.6 Interlocking Device “type” Characteristics ..... 71

9.3.3.7 Non-Contact Interlocked Guard Monitoring using Standard Retro-Reflective Photo Sensor (Category B) ..... 72

9.3.3.8 Non-Contact Interlocked Guard Monitoring using Standard Magnetic Sensor (Category B)..... 73

9.3.3.9 Non-Contact Interlocked Guard Monitoring – Single Channel w/ a SIM and PES (Category 2)..... 74

9.3.3.10 Non-Contact Interlocked Guard Monitoring Circuit (Category 3) .. 75

9.3.3.11 Interlocked Guard Monitoring – Dual Channel with a SIM (Category 3)..... 76

9.3.3.12 Interlocked Guard Monitoring – Dual Channel with a SIM (Category 4)..... 77

9.3.3.13 Interlocked Guard Monitoring – Dual Channel with a SIM (Category 4)..... 78

9.3.3.14 Interlocked Guard Monitoring – Dual Channel with a SIM (Category 4)..... 79

9.3.3.15 Interlocked Guard Monitoring – Dual Channel with a SIM (Category 4)..... 80

**9.4 Guard Locking Interlocks ..... 81**

**9.4.1 Design Requirements..... 81**

**9.4.2 Design Considerations ..... 81**

9.4.2.1 General Information..... 81

9.4.2.2 Power to Release, Inline Guard locking Interlock (Category 2) ..... 82

9.4.2.3 Power to Release, Dual Axis Guard Locking Interlock (Category 3) ..... 83

9.4.2.4 Power to Release, Dual Axis Interlock Connected with secondary guard interlock switch to a SIM (Category 4) ..... 84

9.4.2.5 Power to Release, Dual Axis Interlock Connected with Secondary Guard Interlocking Device to a SIM (Category 4)..... 85

**9.5 Optical Presence Sensing Devices ..... 86**

**9.5.1 Design Requirements..... 86**

**9.5.2 Design Considerations ..... 86**

9.5.2.1 General Information..... 86

9.5.2.2 Light Curtains..... 86

9.5.2.3 Single/Multiple Beam Devices (Point or Grid Devices) ..... 86

9.5.2.4 Scanners..... 87

**9.5.3 Application Examples ..... 87**

9.5.3.1 IEC 61496 Type 2 Presence Sensing Device with Control Relay (Category 1)..... 87

9.5.3.2 IEC 61496 Type 2 Presence Sensing Device with Force-Guided

	Relay (Category 2) .....	88
9.5.3.3	IEC 61496 Type 2 Presence Sensing Device with Force-Guided Relay (Category 2) .....	89
9.5.3.4	IEC 61496 Type 3 Presence Sensing Device with Safety Interface Module (Category 3).....	90
9.5.3.5	IEC 61496 Type 4 Presence Sensing Device with OSSD (Category 4).....	91
9.5.3.6	IEC 61496 Type 4 Presence Sensing Device with Safety Interface Module (Category 4).....	92
<b>9.6</b>	<b>Safety Mats / Edges .....</b>	<b>93</b>
<b>9.6.1</b>	<b>Design Requirements.....</b>	<b>93</b>
<b>9.6.2</b>	<b>Application Examples .....</b>	<b>93</b>
	9.6.2.1 Single Safety Mat using a Safety Interface Module (Category 2) ...	93
	9.6.2.2 Multiple Safety Mats using a Safety Interface Module (Category 2) ...	94
<b>9.7</b>	<b>Two-Hand Control.....</b>	<b>95</b>
<b>9.7.1</b>	<b>Design Requirements.....</b>	<b>95</b>
<b>9.7.2</b>	<b>Design Considerations .....</b>	<b>95</b>
	9.7.2.1 General Information.....	95
	9.7.2.2 Tampering / Defeat.....	95
	9.7.2.3 Failure Modes.....	95
<b>9.7.3</b>	<b>Application Examples .....</b>	<b>96</b>
	9.7.3.1 Two-Hand Control Device (Type IIIa Category 1).....	96
	9.7.3.2 Two-Hand Control Device (Type IIIa Category 1).....	97
	9.7.3.3 Two-Hand Control Device (Type IIIb Category 3).....	98
	9.7.3.4 Two-Hand Control Device (Type IIIb Category 3).....	99
	9.7.3.5 Two-Hand Control Device (Type IIIc Category 4).....	100
<b>9.8</b>	<b>Speed Detection.....</b>	<b>101</b>
<b>9.8.1</b>	<b>Design Requirements.....</b>	<b>101</b>
<b>9.8.2</b>	<b>General Information and Design Considerations.....</b>	<b>101</b>
	Common means of determining speed are given in 9.8.2.1 – 9.8.2.3.....	101
	9.8.2.1 Back EMF Sensing.....	101
	9.8.2.2 Encoder Sensing.....	101
	9.8.2.3 Proximity Switch Sensing.....	101
	9.8.2.4 Tampering / Defeat.....	101
	9.8.2.5 Failure Modes.....	101
<b>9.8.3</b>	<b>Application Examples.....</b>	<b>102</b>
	9.8.3.1 Single Proximity Sensing (Category 1).....	102
	9.8.3.2 Dual Proximity Sensors to Timers and Force-Guided Relay Monitoring (Category 3).....	103
	9.8.3.3 Dual Proximity Sensors to Timers and Force-Guided Relay Monitored by a SIM (Category 3).....	104
	9.8.3.4 Dual Proximity Sensors to Dual Frequency Counters Monitored by a SIM (Category 3).....	105
	9.8.3.5 Dual Proximity Sensors Plus Zero-speed or Stand Still SIM (Category 3 or 4).....	106
	9.8.3.6 Encoder Speed Monitoring (Category 3).....	107
	9.8.3.7 Motor Drive Back EMF Detection (Category 3 or 4).....	108
<b>9.9</b>	<b>Enabling Devices .....</b>	<b>109</b>
<b>9.9.1</b>	<b>Design Requirements.....</b>	<b>109</b>
<b>9.9.2</b>	<b>Design Considerations .....</b>	<b>109</b>
	9.9.2.1 Tampering / Defeat.....	109
	9.9.2.2 Failure Modes.....	109
<b>9.9.3</b>	<b>Application Examples .....</b>	<b>110</b>
	9.9.3.1 Non-Contact Interlocked Guard Monitoring – Single Channel w/ a SIM and PES (Category 2).....	110
	9.9.3.2 Enabling device with an interlock for manual operation (Category 3).....	111
	9.9.3.3 Enabling Device with Manual/Auto Switch (Category 3).....	112

9.9.3.4 Enabling Device with Manual Suspension Enable (Category 3) ... 113

9.9.3.5 Enabling Device with Manual Suspension and Reduced Speed (Category 4)..... 114

**10 Design Requirements - Logic Devices ..... 115**

**10.1 General ..... 115**

**10.1.1 Design Requirements..... 115**

**10.1.2 Design Considerations ..... 115**

10.1.2.1 Safety Interface Module General Information ..... 115

10.1.2.2 Tampering / Defeat ..... 115

10.1.2.3 Failure Modes ..... 116

10.1.2.4 Reset Function of the Safety Circuit ..... 116

**10.2 Software and Programming..... 116**

**10.2.1 General ..... 116**

**10.2.2 Software Safety Requirements Specifications (SSRS)..... 117**

**10.2.3 Components..... 117**

10.2.3.1 Inputs ..... 117

10.2.3.2 Logic..... 117

10.2.3.3 Outputs..... 117

**10.2.4 Structure ..... 117**

**10.2.5 Programming ..... 118**

**10.2.6 Software validation..... 118**

**10.2.7 Cybersecurity..... 118**

**10.2.8 Remote access..... 118**

**11 Design Requirements – Output Devices (MPCE) ..... 119**

**11.1 Relays and Contactors..... 119**

**11.1.1 Design Requirements..... 119**

**11.1.2 Design Considerations ..... 119**

11.1.2.1 Tampering / Defeat ..... 119

11.1.2.2 Failure Modes ..... 119

**11.1.3 Application Examples ..... 120**

11.1.3.1 Contactor (Category 1) ..... 120

11.1.3.2 Force-Guided Contactor (Category 2) ..... 121

11.1.3.3 Dual Force-Guided Contactor (Category 3)..... 122

11.1.3.4 Dual Force-Guided Contactor (Category 4)..... 123

**11.2 Power Drive Systems for Safe Torque Off ..... 124**

**11.2.1 Design Considerations ..... 124**

11.2.1.1 General Information ..... 124

**11.2.2 Application Examples ..... 126**

11.2.2.1 Single Channel Interlock Functional Stop Category 0 (per NFPA 79) of an AC Motor using Standard Rated AC Drive (Category 1) 126

11.2.2.2 Single Channel Interlock Functional Stop Category 1 (per NFPA 79) of an AC Motor using Standard Rated AC Drive (Category 1) 127

11.2.2.3 A Functional Stop Category 0 (per NFPA 79) of an AC Motor using Safety-related AC Drive (Category 3)..... 128

11.2.2.4 Functional Stop Category 1 (per NFPA 79) of an AC Motor using Safety-rated AC Drive (Category 3) ..... 129

11.2.2.5 Dual Channel Interlock Functional Stop Category 0 (per NFPA 79) of an AC Motor using Standard Rated AC Drive with Checking (Category 4)..... 130

11.2.2.6 Dual Channel Interlock Functional Stop Category 0 (per NFPA 79) of an AC Motor using Safety-rated AC Drive with Checking and one Force Guided Contactor (Category 4) ..... 131

**11.3 Pneumatic Systems..... 132**

**11.3.1 Design Requirements..... 132**

**11.3.2 Design Considerations ..... 132**

**11.3.3 Supply Circuit ..... 132**

**11.3.4 Energy Isolation/Lockout Valve ..... 132**

**11.3.5 Air Preparation (Contamination Control) ..... 132**

**11.3.6 Filtration ..... 132**

**11.3.7 Regulator ..... 132**

**11.3.8 Lubrication ..... 132**

    11.3.8.1 Non-Lubricated (preferred) ..... 132

    11.3.8.2 Lubricated (not recommended) ..... 132

**11.3.9 Air Valve Mufflers ..... 133**

**11.3.10 Pneumatic Safety Functions ..... 134**

    11.3.10.1 Exhaust (Blocking/Dump) Safety Function ..... 134

    11.3.10.2 Exhaust (blocking/Dump) – 3/2 Normally Closed Valve (Category 1)..... 134

    11.3.10.3 Exhaust (Blocking/Dump) – 5/3 Open Center Valve (Category 1) ..... 135

    11.3.10.4 Exhaust (blocking/Dump – 3/2 Normally Closed Valve with Integrated Sensor (Category 2)..... 135

    11.3.10.5 Exhaust (Blocking/Dumping) – 3/2 Normally Closed Valve with Pressure Sensor (Category 2)..... 136

    11.3.10.6 Exhaust (Blocking/Dump) – 3/2 Normally Closed Valve with Integrated Sensor in Series with 5/3 Open Center Valve (Category 3)..... 136

    11.3.10.7 Exhaust (Blocking/Dump) – 3/2 Normally Closed Valve with Pressure Sensor in Series with 5/3 Open Center Valve (Category 3) ..... 137

    11.3.10.8 Exhaust (Blocking/Dump) 3/2 Normally Closed Valves with Integrated Sensors in Series (Category 4)..... 138

    11.3.10.9 3/2 Exhaust (Blocking Dump) – Normally Closed Safety-Rated Dual Valve with Sensors, Automatic Reset (Category 4)..... 139

    11.3.10.10 Exhaust (Blocking/Dump) – 3/2 Normally Closed Safety-Rated Dual Valve with Internal Monitoring and Feedback Sensor, Automatic Reset (Category 4)..... 140

    11.3.10.11 Exhaust (Blocking Dump) 3/2 Normally Closed Safety-Rated Dual Valve with Internal Monitoring, Feedback Sensor, Manual Reset (Category 4) ..... 141

**11.3.11 Safe Valve Position/Direction (Safe Return) ..... 141**

    11.3.11.1 Design Requirements ..... 141

    11.3.11.2 Design Considerations ..... 141

    11.3.11.3 Safe Valve Position/Direction (Safe Return) – 5/2 Valve (Category 1)..... 142

    11.3.11.4 Safe Valve Position/Direction (Safe Return) – 5/2 Valve with Integrated Sensor (Category 2)..... 142

    11.3.11.5 5/2 Safe Valve Position/Direction (Safe Return) – Safety-Rated Dual Valve with Integrated Sensors, Automatic Reset (Category 3 or 4)..... 143

    11.3.11.6 Safe Valve Position/Direction(Safe Return) – Dual Safety-Rated 5/2 Valve with Internal Monitoring, Feedback Sensor, Automatic Reset (Category 4) ..... 144

    11.3.11.7 Safe Valve Position/Direction (Safe Return) – Dual Safety-Rated Valve with Internal Monitoring, Feedback Sensor, Manual Reset (Category 4)..... 144

**11.3.12 Maintain End of Stroke Position (Safe Last Position) ..... 145**

    11.3.12.1 Design Requirements ..... 145

    11.3.12.2 Design Considerations ..... 145

    11.3.12.3 Maintain End of Stroke Position (Safe Last Position) - 5/2 Detented Valve (Category 1)..... 145

    11.3.12.4 5/2 Maintain End of Stroke Position (Safe Last Position) - Detented Valve with Integrated Sensor (Category 2) ..... 146

**11.3.13 Safe Stopping (Load Holding) ..... 146**

    11.3.13.1 Control and Stop/Hold..... 146

11.3.13.2 Control and Stop/Hold 5/2 Closed Center Valve (Category 1) ... 147

11.3.13.3 Control and Stop/Hold – 5/3 Closed Center Safety-Rated Dual Valve with Integrated Sensors, Automatic Reset (Category 3 or 4) 147

**11.3.14 Stop (Load Holding) ..... 148**

11.3.14.1 Stop (Load Holding) Pilot Operated (P.O.) Check ..... 148

11.3.14.2 Stop (Load Holding) – Pilot Operated Check Valve (Category 1) 149

11.3.14.3 Stop (Load Holding) Pilot Operated Check Valve with Integrated Sensor (Category 2) ..... 149

11.3.14.4 Stop (Load Holding) Pilot Operated Check Valve with Actuator Sensor Feedback (Category 2) ..... 150

11.3.14.5 Stop (Load Holding) 5/3 Closed Center Valve with Pilot Operated Check Valve with Integrated Sensor (Category 3) ..... 151

11.3.14.6 Stop (Load Holding) – 5/3 Open Center Valve with Redundant Pilot Operated Check Valve with Integrated Sensors and Safety Rated Exhaust Valve (Category 3)..... 152

11.3.14.7 Stop (Load Holding) – 5/3 Open Center Valve with Redundant Pilot Operated Check Valve with Integrated Sensors and Redundant Control Valves (Category 3) ..... 153

**11.3.15 Rod locks / brakes ..... 154**

11.3.15.1 Design Requirements ..... 154

11.3.15.2 Design Considerations ..... 154

11.3.15.3 Rod Locks / brakes – 3/2 Normally Closed Valve (Category 1) . 154

11.3.15.4 Rod Locks / Brakes – 3/2 Normally Closed Valve with Pressure feedback and Safety-Rated Rod Lock with position feedback (Category 2)..... 155

11.3.15.5 Rod locks / brakes – Redundant 3/2 Normally Closed Valve with Pressure feedback and Redundant Safety-Rated Rod Lock with position feedback (Category 3) ..... 156

11.3.15.6 Rod Locks / Brakes – Redundant 3/2 Normally Closed Safety-Rated Dual Valve with Sensors, Automatic Reset and Redundant Safety-Rated Rod Lock with Dual position feedback (Category 4) 157

**11.3.16 Flow Control ..... 158**

11.3.16.1 Design Requirements ..... 158

11.3.16.2 Design Considerations ..... 158

Meter-IN 158

11.3.16.3 Flow Control – Meter Out Flow Control Example ..... 159

11.3.16.4 Flow Control – Meter Out Flow Control Example ..... 160

**11.3.17 Safe Pressure (force) Selection ..... 160**

11.3.17.1 Design Requirements ..... 160

11.3.17.2 Design Considerations ..... 161

11.3.17.3 Safe pressure (force) selection - 5/2 Valve (Category 1) ..... 161

11.3.17.4 Safe pressure (force) selection - 5/2 Valve with Integrated Sensor (Category 2)..... 161

11.3.17.5 5/2 Safe Valve Position/Direction (Safe Return) – Safety-Rated Dual Valve with Integrated Sensors (Category 4) ..... 162

**11.3.18 Velocity Fuse..... 162**

11.3.18.1 Design Requirements ..... 162

11.3.18.2 Design Considerations ..... 162

11.3.18.3 Velocity fuse (Category 1) ..... 163

**11.4 Hydraulic Systems..... 163**

**11.4.1 Hydraulic Design Requirements ..... 163**

**11.4.2 Fluid Preparation (Contamination Control) ..... 164**

**11.4.3 Dump and Block Fluid to the Hazardous Motion ..... 165**

11.4.3.1 Design Requirements ..... 165

11.4.3.2 Design Considerations ..... 165

11.4.3.3 Dump and Block - 5/3 Open Center (Float Center) Valve (Category

1)	165
11.4.3.4 Dump and Block - 4/2 Valve (Category 1)	166
11.4.3.5 Dump and Block - 4/2 Valve with Integrated Sensor (Category 2)	166
11.4.3.6 Dump and Block - 4/2 Valve with Pressure Sensor (Category 2)	167
11.4.3.7 Dump and Block – 3/2 Normally Closed Valve with Integrated Sensor in Series with 5/3 Open Center (Float Center) Valve (Category 3)	167
11.4.3.8 Dump and Block – Redundant 4/2 Valve with Integrated Sensor in Series (Category 3 or 4)	168
<b>11.4.4 Return</b>	<b>168</b>
11.4.4.1 Design Requirements	168
11.4.4.2 Design Considerations	168
11.4.4.3 4/2 Valve (Category 1)	169
11.4.4.4 4/2 Valve with Integrated Sensor (Category 2)	169
<b>11.4.5 Maintain End of Stroke Position</b>	<b>170</b>
11.4.5.1 Design Considerations	170
11.4.5.2 Design Considerations	170
11.4.5.3 4/2 Detented Valve (Category 1)	170
<b>11.4.6 Control and Stop/Hold</b>	<b>170</b>
11.4.6.1 Design Requirements	170
11.4.6.2 Design Considerations	170
11.4.6.3 Control and Stop/Hold – 4/3 Closed Center or Tandem Center Valve (Category 1)	171
<b>11.4.7 Load Holding - Spring Return Blocking and Pilot Operated Check Valves</b>	<b>171</b>
11.4.7.1 Design Requirements	172
11.4.7.2 Design Requirements	172
11.4.7.3 Load Holding – Pilot Operated Check Valve or 2/2 Normally Closed Valve (Category 1)	172
11.4.7.4 Load Holding – Pilot Operated Check Valve or 2/2 Normally Closed with Integrated Sensor (Category 2)	173
11.4.7.5 Load Holding – Low / Intermediate Risk Reduction Pilot Operated Check Valve or 2/2 Normally Closed with Actuator Sensor Feedback (Category 2)	174
11.4.7.6 Load Holding – Pilot Operated Check Valve or 2/2 Normally Closed with Integrated Sensor (Category 2)	174
11.4.7.7 Load Holding – 5/3 Closed Center Valve with Redundant Pilot Operated Check Valves or 2/2 Normally Closed Valves w/ Integrated Sensors and Redundant Control Valves (Category 3)	175
<b>11.4.8 Load Holding – Counter-balance Valves</b>	<b>175</b>
<b>11.4.9 Rod Locks and Rod Brakes</b>	<b>176</b>
11.4.9.1 Design Requirements	176
11.4.9.2 Design Considerations	176
11.4.9.3 Rod Lock/Brake (Category 1)	176
<b>11.4.10 Speed Control Flow Controls</b>	<b>177</b>
<b>11.4.11 Velocity Fuse</b>	<b>178</b>
<b>12 Validation</b>	<b>179</b>
<b>13 Change Management</b>	<b>180</b>
<b>14 Information for Use</b>	<b>180</b>

<b>Annex A – Symbols .....</b>	<b>181</b>
<b>Annex B – Performance Levels and Safety-Related Block Diagrams .....</b>	<b>187</b>
<b>Annex C – Categories and How to Make a Selection .....</b>	<b>193</b>
<b>Annex D – Section 1: Mean Time to Failure, Dangerous (MTTF<sub>D</sub>) .....</b>	<b>200</b>
<b>Annex D – Section 2: Diagnostic Coverage .....</b>	<b>206</b>
<b>Annex D – Section 3: Estimating the Common Cause Failure (CCF).....</b>	<b>210</b>
<b>Annex E – Calculation Aids for Determination of SRP/CS PFH &amp; PL .....</b>	<b>212</b>
<b>Annex F – Analysis of Circuit Considerations.....</b>	<b>221</b>
<b>Annex G – Failures, Systemic .....</b>	<b>226</b>
<b>Annex H – General Overview of Valves .....</b>	<b>228</b>
<b>Annex I – Performance of the Safety-Related Function(s) (Overview) .....</b>	<b>232</b>
<b>Annex J – External Device Monitoring by the Safety-Related Function .....</b>	<b>234</b>
<b>Annex K – Validation Tools for Mechanical Systems .....</b>	<b>236</b>
<b>Annex L – Validation Tools for Pneumatic Systems.....</b>	<b>239</b>
<b>Annex M – Validation Tools for Hydraulic Systems.....</b>	<b>247</b>
<b>Annex N – Validation Tools for Electrical Systems .....</b>	<b>253</b>
<b>Annex O – Consideration for Fluid Power DC (Diagnostic Coverage).....</b>	<b>261</b>
<b>Annex P – Change Management System .....</b>	<b>267</b>
<b>Annex Q – Example of avoiding an overly complex pneumatic design .....</b>	<b>268</b>

**Foreword (The Foreword is NOT a normative part of ANSI B11.26-2024)**

The content of this American National Standard was first developed and released as ANSI Technical Report B11.TR6 and published in December 2010. In the subsequent years of use, the B11 Standards Development Committee decided that the content of the document was sufficiently important to be elevated to a standard and agreed to a revision of B11.TR6 as American National Standard ANSI B11.26 in order to address the dynamic state of ongoing international and national/regional standard revisions regarding functional safety and in particular, to provide a more practical “application-type” document for the complicated ISO 13849 standard. The primary attributes of the first edition of the ANSI B11.26 standard were the allowance of different methodologies to characterize reliability, detailed example schematic diagrams, and “Circuit Analysis Tables” that provided additional technical detail for each example. Detailed annexes for understanding performance levels and category block diagrams as outlined in ISO 13849-1 were also provided. The detailed, generic (non-supplier specific) schematic diagrams were based on actual applications that have been successfully implemented in industry.

The current revision further expands on the 2016 edition and includes the following significant changes:

- **Changed title to clarify that the standard is intended to address requirements for functional safety – using a variety of accepted methodologies;**
- **Definitions updated and harmonized with other ANSI B11 standards where practical;**
- **Added and clarified requirements in clause 4, when using categories to specify reliability;**
- **Provided historical information on “control reliability;”**
- **Included Safety integrity level (IEC 62061) methodology as an approved methodology to specify reliability;**
- **Modified Risk Graph for Categories to clarify selection;**
- **Provided information/requirements for trapped key applications;**
- **Provided basic requirements for software used in functional safety applications;**
- **Provided basic requirements for management of change;**
- **Fluid power output applications reorganized by safety function; for example, “directional valves” were separated into exhaust, return, or stopping functions;**
- **Additional fluid power example functions added for safe pressure, closed center stopping, and rod lock applications;**
- **Fluid power monitoring was expanded to explain different methods of monitoring;**
- **Fluid power application chart data simplified;**
- **addition of Annex Q (Example of using ISO 13849 to avoid overly complex designs).**

The B11.26 Subcommittee provided many examples for common solutions of current industrial circuit applications. It is important to understand that there are many ways to fulfil a given engineering requirement, and the examples provided in this standard only present one of those many options. These examples are not normative, nor intended to limit innovation or the advancement of technology.

ANSI B11.26 illustrates safety control circuit design concepts used to realize safety functions. These functions reduce risks identified by a risk assessment. The example circuits, explanations, and minimum fault exclusions are for educational purposes and do not contain complete information on electrical, fluid power, and mechanical design requirements. Substitutions, additions, or changes to the circuits, components, safety modules, or engineering control – devices should be thoroughly researched and examined as to the extent of the impact on the integrity, reliability, and the level of performance of the safety functions. The designer should refer to relevant standards, regulations, and codes to address the installation and safety requirements.

Industry users expressed the desire that example circuits be depicted in a NEMA format. To provide clarity and enhance understanding, the writing subcommittee created symbols for safety components that previously did not exist. These new symbols distinguish safety-rated devices from their non safety-rated counterparts such as emergency stops and forced guided relays. This document also identifies the relationship between risk assessment (ANSI B11.0) and control circuit reliability, including the use of ISO 13849-1.

Internal (intra-document) references are hotlinked to their source; to activate, position the cursor over the hotlink and use control and left-click.

Inquiries with respect to the application or the substantive requirements of this standard, and suggestions for its improvement, are welcomed and should be sent to B11 Standards, Inc.: [cfelinski@B11standards.org](mailto:cfelinski@B11standards.org) Attention: B11 Secretariat / B11.26.

This standard was prepared by the B11.26 Subcommittee, processed and submitted for ANSI approval by the B11 Standards Development Committee on Safety Standards for Machines. At the time this standard was approved as an American National Standard, the ANSI B11 Standards Development Committee was composed of the following member organizations:

Alan Metelsky, FS Eng, Chair / Anne Mathias, PE, Vice-Chair / David Felinski, Secretary

**Organizations Represented**

**Name of Representative**

	<b>Delegate</b>	<b>Alternate</b>
Aluminum Extruders Council	Mel Mitchell, CSP	Brad Wyatt, CSP
Amazon Robotics	Jeread Sines, B11 LMSS, FS Eng	Josh Owens, B11 LMSS, FS Eng
American Society of Safety Professionals	Ted Sberna, Sr.	Anne Mathias, PE
Association for Advancing Automation	Maren Roush	Jeff Fryman
Association For Manufacturing Technology	Doug Otte	Alan Metelsky, FS Eng
Assn. for Packaging & Processing Technologies	Bruce Main, PE, CSP	Tom Egan
The Boeing Company	Rhiannon McPherson	Mark Ellingson
Bridgestone	Kenji Furukawa, FS Eng	Joey Hinson, FS Eng
Canadian Standards Association	Ana Andronesco, P.Eng.	Walter Veugen
Deere & Co.	Scott Winter	Liz Frimel
Eli Lilly	Bryan Harrell, FS Eng	Danny Deighton
Euchner	Andrew Smith	Jilani Bouchane
Exponent	Steve Andrew, PE, CSM	Alex Zelhofer, PhD, PE
FDR Safety	Mike Taubitz	Luke Contos, Joe Wolfsberger
Fortress Safety	Jenny Tuertscher, B11 LMSS, FS Eng	
Honda Development & Mfg. of America	Todd Dickey	Doug Titus, Tyler Willis
General Motors Corporation	Tony Ross	Phyllis Childs
IDEM Safety	Mark Witherspoon	Amir Mohtasham
International Union, UAW	Jim Holton	Matt Uptmor
Komatsu America Industries	George Schreck	James Landowski
Liberty Mutual	Ashlee Blum, CSP, CSE	Julie Thompson, CSP
MAG Automotive	Erik Carrier	Doug Watts
Metal Powder Industries Federation	Bill Edwards	James Adams
National Inst. for Occupational Safety & Health	Rick Current, PE	
Occupational Safety & Health Administration	Ken Stevanus	Mary Bauer, CIH, CSP, B11 LMSS
Omron Scientific Technologies Incorporated	Rex Kiehl	Tina Hull, FS Exp
Pilz Automation Safety, LP	Mike Beerman, CMSE	Dino Mariuz
Plastics Industry Association	Jeff Linder	Dale Bartholomew
Precision Metalforming Association	Jim Barrett, Jr. PhD	David Klotz
Rockwell Automation	Darin Magnuson, FS Eng	Jonathan Barrett, FS Eng
Rockford Systems	Brian Boes, B11 LMSS	Matt Brenner
Ross Controls	Chris Brogli	Eric Cummings, B11 LMSS, FS Eng
Safe-T-Sense	Mike Poynter, FS Eng	Federico Badillo
SICK PCA	Chris Soranno, FS Exp	Christian Bidner
Sheet Metal & Air Cond. Contractors Nat'l. Assn.	Justin Crandol, CSP	Rick Di Ioli
Toyota Motor Manufacturing North America	Chip Boertlein	Mike Collier, B11 LMSS

At the time this standard was approved, the **B11.26 Functional Safety Subcommittee** had the following members who participated in and contributed to the development of this American National Standard:

Alan Metelsky, Chairman	Gleason Works	Eric Cummings, Vice-Chair	Ross Controls
Jim Barrett	Link Systems	Marc Lewandowski	Proctor & Gamble
Craig Brockway	Machine Safety Specialists	Bruce Main	design safety engineering
Chris Brogli	Ross Controls	Rhiannon McPherson	Boeing
David Brown	DuPont	Nathan O'Connor	Nexen Group
Patric Brown	Grantek	Alex Parry	Safe-T-Sense
Eric Carrier	MAG Automotive	Mike Poynter	Safe-T-Sense
Eddie Crawford	Rockwell	Jacob Prange	Nexen Group
Chase Davis	EOSYS Group	Ted Sberna, Sr.	White Horse Safety
Todd Dickey	Honda	Jeread Sines	Amazon
Bryant Eismeier	Flexware Innovation	Marco Tacchini	GT Engineering, Italy
Kenji Furukawa	Bridgestone	Marty Timm	Centigrade Services
Bryan Harrell	Eli Lilly	Jenny Tuertscher	Fortress Safety
Ryan Hayworth	Airline Hydraulics	Mark Witherspoon	IDEM Safety
Jim Holton	International UAW	Chris Felinski, Secretary	B11 Standards, Inc.

## Introduction & Overview of the ANSI B11 Series of Machinery Safety Standards

### Introduction

The purpose of the ANSI B11 series of machinery safety standards and technical reports is to devise and propose ways to eliminate or minimize risks of the potential hazards associated with the required tasks. This can be accomplished either by an appropriate machine design or by restricting personnel or other individuals' access to hazard zones, and by devising work procedures to minimize personnel exposure to hazardous situations. This is the essence of the ANSI B11 series of safety standards. This standard recognizes that zero risk does not exist and cannot be attained. However, a good faith approach to risk assessment and risk reduction should achieve an acceptable risk level.

### Organization and Application of B11 Documents

The ANSI B11 series of standards and technical reports can be associated with the ISO “type A-B-C” structure as described immediately below, and as shown in Figure 1.

- **Type-A standards** (basis standards) give basic concepts, principles for design, and general aspects that can be applied to machinery;
- **Type-B standards** (generic safety standards) deal with one or more safety aspects or one or more types of engineering controls that can be used across a wide range of machinery;
- **Type-C standards** (machinery safety standards) deal with detailed safety requirements for a particular machine or group of machines.

The B11 Standards Development Committee recognizes that an additional type of standard has emerged, which we categorize as a so-called “**Hybrid standard.**” These hybrid standards represent an evolutionary development in machinery safety standardization that combines some unspecified percentage of the typical content and requirements found in any two (or even all three) of the standard types described above. Usually, there are some combinations of requirements generally found in type-A and type-C standards. With the possible exception of ANSI B11.0, none of the other documents in the B11 portfolio fit into this new type, numerous examples of these hybrid machinery safety standards exist outside of ANSI B11.

The B11.0 standard on general safety requirements common to ANSI B11 machines is primarily a “type -A” standard in that it applies to a broad array of machines and contains very general requirements. However, in many areas it also contains very specific requirements. B11.19, B11.20, B11.21, B11.25, B11.26, as well as the entire B11 series of Technical Reports are all typical “type-B” documents addressing general safety elements that can be used across a wide range of machinery (such as B11.19 and B11.26) or as a standard when combining machines (B11.20). The B11 series of Technical Reports are informative documents that may be generally applied to many different machines, and as such would fall into the “type-B” category. The machine-specific (“type-C”) B11 standards contain detailed safety requirements for a particular machine or group of machines (such as this standard). The type-A B11.0 and the type-C (machine-specific) B11 standards are intended to be used concurrently by the supplier and user of machines. When a type-C standard deviates from one or more provisions dealt with by this standard or by a type-A standard, the type-C standard requirement generally takes precedence. Any deviation in conforming to a requirement of any standard should be carefully evaluated and based on a documented risk assessment.

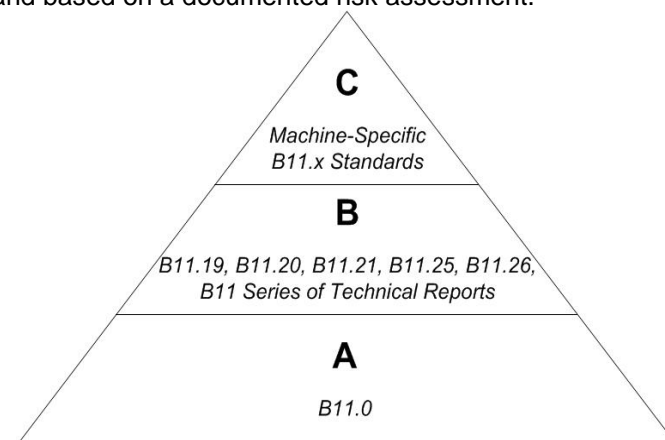
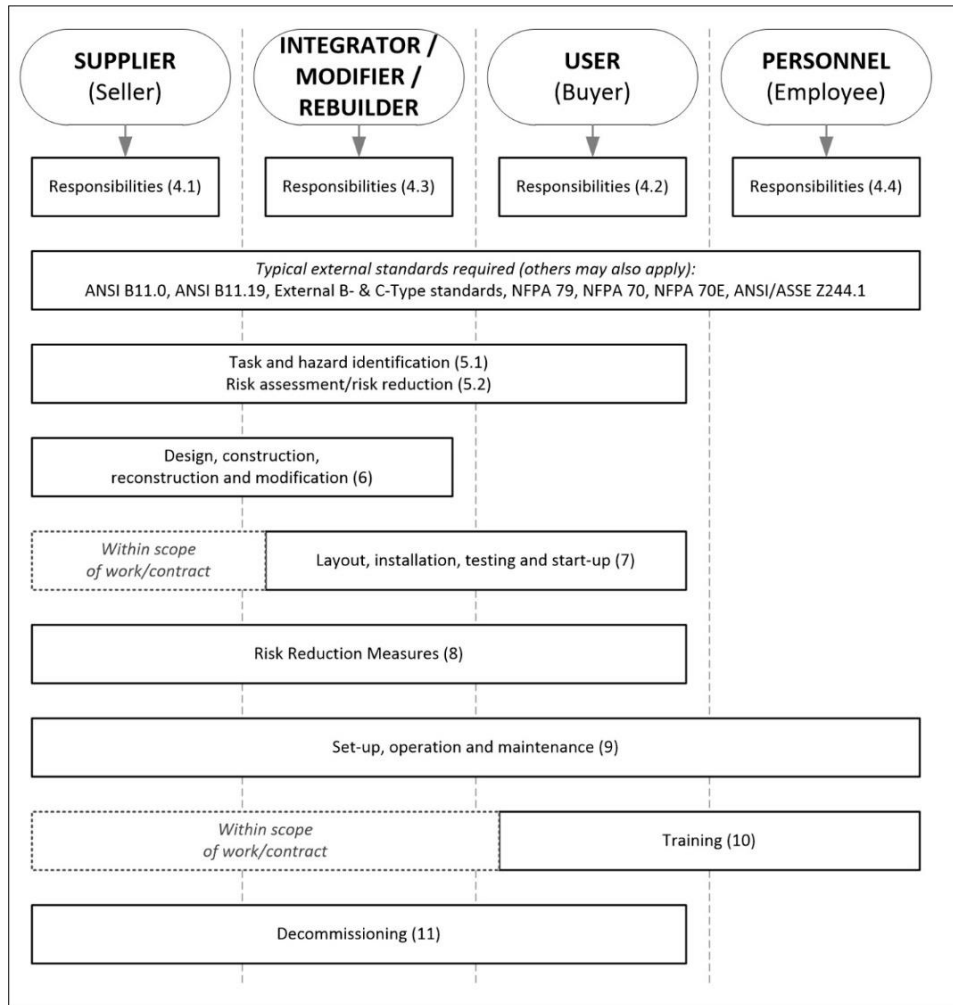


Figure 1: Organization of the B11 Series of Documents

ANSI B11.26 applies when a control system is used as a risk reduction measure. The responsibility for reducing these risks to an acceptable level is divided between the equipment supplier, the equipment modifier, the equipment user and its operating personnel. Figure 2 (below) provides the structure of a typical type-C standard and in particular, the responsibilities of and requirements for the supplier, modifier, user, and the user personnel. Figure 2 is provided so the reader can better understand the responsibilities for reducing risk, since this type-B standard applies when a control system is used as a risk reduction measure. Parenthetical numbers denote the particular clause/subclause of the type-C standard.



**Figure 2: Typical clause layout of B11 base (type-C) standards showing the various responsibilities**

- **SUPPLIER:** The early stages of a project present the greatest opportunity to determine project requirements and to anticipate and eliminate hazards and hazardous situations.
- **MODIFIER:** The entity (OEM, Supplier, or the expert) in that discipline responsible for creating or modifying the system, machinery or equipment, shall have all relevant design standards documentation. The entity shall begin by working with the end user to list all tasks to achieve an appropriate comprehensive task list based on the “context of use” for the system, machine or equipment.
- **USER:** The company representatives (can be from many disciplines) where the system, machinery or equipment will reside during its productive life. They should engage in participating in or reviewing the risk assessment and what will be necessary for a final safety buy-off at the final location.
- **PERSONNEL:** The group “at risk” from any hazards or hazardous situation presented by the system, machinery, or equipment while performing their tasks to achieve the company’s desired productive life. This would include, at a minimum, operators, maintenance personnel for both planned and unplanned maintenance, housekeeping and safety representatives. This group would evaluate the engineering controls and administrative controls (see ANSI B11.19).

As of the date of approval of this standard, the ANSI B11 series of American National Standards and Technical Reports on machinery safety consisted of the following documents shown in the list below. The user should check a licensed reseller such as ANSI ([www.ansi.org](http://www.ansi.org)) for the current versions of any of these documents. All archival / historical versions of the documents are available at [www.b11standards.org](http://www.b11standards.org).

#### List of the ANSI B11 Series of Safety Standards and Technical Reports

#	SHORT TITLE / TOPIC	YEAR	TYPE
B11.0	Safety of Machinery	2023	A
B11.1	Mechanical Power Presses	2009 (R2020)	C
B11.2	Hydraulic & Pneumatic Power Presses	2013 (R2020)	C
B11.3	Power Press Brakes	2022	C
B11.4	Shears	2003 (R2020)	C
B11.5	Ironworkers	1988 (R2020)	C
B11.6	Manual Turning Machines w/ or without Auto Control	2022	C
B11.7	Cold Headers and Cold Formers	2020	C
B11.8	Manual Milling, Drilling, & Boring Machines	2022	C
B11.9	Grinding Machines	2010 (R2020)	C
B11.10	Sawing Machines	2003 (R2020)	C
B11.11	<i>Withdrawn</i> (Gear and Spline Cutting Machines; covered by B11.0)	2001 (R2012)	C
B11.12	Roll Forming and Roll Bending Machines	2005 (R2020)	C
B11.13	Single & Multiple-Spindle Automatic Bar and Chucking Machines	2020	C
B11.14	<i>Withdrawn</i> (Coil Slitting Machines; combined into B11.18)	(1996)	C
B11.15	Pipe, Tube and Shape Bending Machines	2022	C
B11.16	Powder / Metal Compacting Presses	2014 (R2020)	C
B11.17	Horizontal Extrusion Presses	2023	C
B11.18	Machines Processing or Slitting Coiled or Non-Coiled Metal	2006 (R2020)	C
B11.19	Performance Requirements for Risk Reduction Measures (Safeguarding)	2019	B
B11.20	Integration of Machinery into a System	2017 (R2022)	B
B11.21	Machine Tools Using Lasers for Processing Materials	2006 (R2020)	B
B11.22	Turning Centers and Automatic Numerically Controlled Turning Machines	2002 (R2020)	C
B11.23	Machining Centers & CNC Milling, Drilling & Boring Machines	2002 (R2020)	C
B11.24	Transfer Machines	2002 (R2020)	C
B11.25	Large Machines	2022	B
B11.26	Functional Safety: Designing SRP/CS for Machinery	2024	B
B11.27	Electro-Discharge Machines	2024	C
B11.TR0	Guide to Establishing a Machine Safety Process Using ANSI B11 Stds	2024	B
B11.TR1	Ergonomics	2016	B
B11.TR2	<i>Withdrawn</i> (Metal Working Fluids)	1997 (R2016)	B
B11.TR3	<i>Withdrawn</i> (Risk Assessment / Risk Reduction Guide)	(2000 R2015)	B
B11.TR4	Selection of Programmable Electronic Systems (PES/PLC)	2004 (R2015)	B
B11.TR5	Noise Measurement	2006 (R2017)	B
B11.TR6	<i>Withdrawn</i> (Safety Control Systems for Machines)	(2010)	B
B11.TR7	Integration of Lean and Safety	2007 (R2017)	B
B11.TR8	Sustainable Safety Systems Thru Inspection of Risk Reduction Measures	2022	B
B11.TR9	Cybersecurity	2019	B
B11.TR10	Guidance on Artificial Intelligence into Machinery Safety Applications	2020	B
B11.TR11	Using ANSI Standards for CE-marking of Machinery	2024	B
ANSI/ISO 12100	Safety of machinery (identical adoption of ISO 12100-2010)	2012	A



# Functional Safety: General Principles for Designing Safety-Related Parts of Control Systems for Machinery

## 1 Scope

This American National Standard provides requirements and guidance for the implementation of safety-related control functions (also known as “functional safety”) as they relate to electrical, electronic, pneumatic, hydraulic, and mechanical components of control systems.

*Informative Note 1:* This document includes a large number of detailed schematic circuit diagrams that are provided as EXAMPLE circuits only, representing common solutions in use at the time of creating this document. It is important to understand that there are many ways to fulfil a given engineering requirement and the examples only present one option. These examples are not normative, nor intended to limit innovation or the advancement of technology.

*Informative Note 2:* This document references ISO 13849-2 – Validation as part of an annex.

*Informative Note 3:* See also, [clause 4](#) on “How to use this standard.”

## 2 References

The following normative documents contain provisions that, through reference in this text, constitute provisions of this American National Standard. At the time of publication, the editions indicated were valid. All normative documents are subject to revision, and parties to agreements subject to this American National Standard should consider applying the most recent editions of the normative documents listed below. This standard is intended to be used in conjunction with the following American National Standards:

### 2.1 Normative References

ANSI B11.0 – 2023, Safety of Machinery

ANSI B11.19 – 2019, Performance Requirements for Risk Reduction Measures: Safeguarding and Other Means for Reducing Risk

NFPA 79 – 2024, Electrical Standard for Industrial Machinery

ANSI / ASSP Z244.1-2016, Control of Hazardous Energy – Lockout, Tagout and Alternative Methods

*Informative Note 1:* At the time of approval of ANSI B11.26, this reference standard has been revised and approved and is expected to be published relatively soon – check the ANSI Standards Store.

### 2.2 Informative References

ANSI B11.TR4 – 2004 (R16), Selection of Programmable Electronic Systems (PES/PLC) for Machine Tools

ANSI / ISO 12100:2012 (ISO 12100:2010 IDT), Safety of machinery – General principles for design – Risk assessment and risk reduction

ASME Boiler and Pressure Vessel Code Section VIII Division 1.

ISO 1219-1:2012, Fluid power systems and components – Graphical symbols and circuit diagrams Part 1: Graphical symbols for conventional use and data-processing applications

ISO 4406:2021 Hydraulic fluid power. Fluids. Method for coding the level of contamination by solid particles

ISO 4413:2010, Hydraulic fluid power – General rules and safety requirements for systems and their components

ISO 4414:2010, Pneumatic fluid power – General rules and safety requirements for systems and their components

ISO 13849-1:2023, Safety of machinery – Safety-related part of control systems – Part 1: General Principles for Design

ISO 13849-2:2012, Safety of machinery – Safety-related part of control systems – Part 2: Validation

*Informative Note:* At the time of approval of ANSI B11.26, this informative reference standard was in revision and is expected to be approved sometime in 2026.

ISO 14119:2024 Interlocking devices associated with guards – Principals for design and selection