

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE



**Field device tool (FDT) interface specification –  
Part 2: Concepts and detailed description**

**Spécification des interfaces des outils de dispositifs de terrain (FDT) –  
Partie 2: Concepts et description détaillée**



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

#### IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

#### IEC Products & Services Portal - [products.iec.ch](http://products.iec.ch)

Discover our powerful search engine and read freely all the publications provided. With a subscription you will always have access to up to date content tailored to your needs.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

### A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

#### Recherche de publications IEC - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

#### Service Clients - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: [sales@iec.ch](mailto:sales@iec.ch).

#### IEC Products & Services Portal - [products.iec.ch](http://products.iec.ch)

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE



**Field device tool (FDT) interface specification –  
Part 2: Concepts and detailed description**

**Spécification des interfaces des outils de dispositifs de terrain (FDT) –  
Partie 2: Concepts et description détaillée**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

ICS 25.040.40; 35.100.05; 35.110

ISBN 978-2-8322-4532-3

**Warning! Make sure that you obtained this publication from an authorized distributor.  
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

## CONTENTS

FOREWORD.....	10
INTRODUCTION.....	12
1 Scope.....	13
2 Normative references .....	13
3 Terms, definitions, symbols, abbreviated terms and conventions .....	13
3.1 Terms and definitions.....	13
3.2 Symbols and abbreviated terms .....	14
3.3 Conventions.....	14
3.3.1 Use of UML .....	14
3.3.2 State availability statement.....	14
3.3.3 Data type names and references to data types .....	14
4 Fundamentals.....	14
4.1 General.....	14
4.2 Abstract FDT model.....	15
4.2.1 FDT model overview .....	15
4.2.2 Frame Application (FA).....	18
4.2.3 Device Type Manager (DTM) .....	19
4.2.4 Channel object .....	26
4.3 Modularity.....	28
4.4 Bus categories .....	28
4.5 Identification .....	29
4.5.1 DTM instance identification.....	29
4.6 System and FDT topology.....	30
4.7 FDT Communication .....	31
4.7.1 General .....	31
4.7.2 Handling of communication requests .....	32
4.7.3 Handling of communication errors.....	32
4.7.4 Handling of loss of connection.....	32
4.7.5 Point-to-point communication.....	32
4.7.6 Nested communication .....	33
4.8 DTM, DTM Device Type and hardware identification information.....	35
4.8.1 DTM and DTM Device Type .....	35
4.8.2 Supported hardware identification.....	36
4.8.3 Connected hardware identification.....	36
4.9 DTM data persistence and synchronization .....	37
4.10 DTM device parameter access .....	38
4.11 DTM state machine.....	38
4.11.1 DTM states .....	38
4.11.2 'Communication allowed' substates.....	39
4.12 Basic operation phases.....	40
4.12.1 Roles and access rights.....	40
4.12.2 Operation phases .....	40
4.13 FDT version interoperability .....	41
4.13.1 Version interoperability overview .....	41
4.13.2 DTM and device versions.....	42
4.13.3 Persistence .....	42

4.13.4	Nested communication .....	43
5	FDT session model and use cases .....	43
5.1	Session model overview.....	43
5.2	Actors .....	44
5.3	Use cases .....	46
5.3.1	Use case overview.....	46
5.3.2	Observation .....	46
5.3.3	Operation .....	46
5.3.4	Maintenance.....	50
5.3.5	Planning .....	53
5.3.6	OEM service.....	56
5.3.7	Administration.....	56
6	General concepts .....	57
6.1	Address management .....	57
6.2	Scanning and DTM assignment.....	58
6.2.1	Scanning overview.....	58
6.2.2	Scanning .....	58
6.2.3	DTM assignment.....	59
6.2.4	Manufacturer-specific device identification.....	59
6.2.5	Scan for communication hardware .....	60
6.3	Configuration of Fieldbus Master or Communication Scheduler.....	60
6.4	PLC tool support.....	61
6.4.1	General .....	61
6.4.2	Process image modifications while PLC is running.....	62
6.5	Slave redundancy .....	63
6.5.1	Redundancy overview.....	63
6.5.2	Redundancy support in Frame Application.....	64
6.5.3	Parent component for redundant fieldbus.....	64
6.5.4	Redundancy support in Device DTM .....	65
6.5.5	Scan and redundant slaves.....	65
7	FDT service specification .....	65
7.1	Service specification overview .....	65
7.2	DTM services .....	66
7.2.1	General services.....	66
7.2.2	DTM services related to installation .....	68
7.2.3	DTM services related to DTM/device information .....	69
7.2.4	DTM services related to the DTM state machine .....	71
7.2.5	DTM services related to functions .....	74
7.2.6	DTM services related to Channel objects – service GetChannels.....	77
7.2.7	DTM services related to documentation – service GetDocumentation .....	77
7.2.8	DTM services to access the instance data .....	77
7.2.9	DTM services to evaluate the instance data.....	79
7.2.10	DTM services to access the device data .....	80
7.2.11	DTM services related to network management information .....	81
7.2.12	DTM services related to online operation .....	82
7.2.13	DTM services related to data synchronization .....	84
7.2.14	DTM services related to import and export.....	86
7.3	Presentation object services .....	86
7.4	Channel object service.....	87

7.4.1	Channel object service overview.....	87
7.4.2	Service ReadChannelInformation.....	87
7.4.3	Service WriteChannelInformation.....	87
7.5	Process Channel object services – services for I/O related information.....	87
7.5.1	Service ReadChannelData.....	87
7.5.2	Service WriteChannelData.....	88
7.6	Communication Channel object services.....	88
7.6.1	Services related to communication.....	88
7.6.2	Services related to sub-topology management.....	92
7.6.3	Services related to GUI and functions.....	94
7.6.4	Service Scan.....	95
7.7	Frame Application services.....	96
7.7.1	General state availability.....	96
7.7.2	FA services related to general events.....	96
7.7.3	FA services related to topology management.....	97
7.7.4	FA services related to redundancy.....	100
7.7.5	FA services related to storage of DTM data.....	101
7.7.6	FA services related to DTM data synchronization.....	102
7.7.7	FA service related to process image validation – service ValidateProcessImage.....	103
7.7.8	FA services related to presentation.....	104
7.7.9	FA Services related to audit trail – service RecordAuditTrailEvent.....	105
8	FDT dynamic behavior.....	105
8.1	Generate FDT topology.....	105
8.1.1	FDT topology generation triggered by the Frame Application.....	105
8.1.2	FDT topology generation triggered by the DTM.....	106
8.2	Address setting.....	107
8.2.1	Address setting overview.....	107
8.2.2	Set or modify device address – with user interface.....	107
8.2.3	Set or modify device address – without user interface.....	107
8.2.4	Display or modify child device addresses with user interface.....	108
8.3	Communication.....	109
8.3.1	Communication overview.....	109
8.3.2	Point-to-point communication.....	109
8.3.3	Nested communication.....	109
8.3.4	Device-initiated data transfer.....	110
8.4	Scanning and DTM assignment.....	111
8.5	Multi-user scenarios.....	112
8.5.1	General.....	112
8.5.2	Synchronized and non-synchronized locking mechanism for DTMs.....	114
8.5.3	Additional rules.....	116
8.6	Notification of changes.....	116
8.7	DTM instance data state machines.....	116
8.7.1	Instance data set overview.....	116
8.7.2	Modifications state machine.....	117
8.7.3	Persistence state machine.....	118
8.7.4	Modification in device.....	118
8.7.5	Storage life cycle.....	119
8.8	Parent component handling redundant slave.....	120

8.9	DTM upgrade .....	121
8.9.1	General rules .....	121
8.9.2	Saving data from a DTM to be upgraded .....	122
8.9.3	Loading data in the replacement DTM .....	122
Annex A (normative) FDT data types definition .....		124
A.1	General .....	124
A.2	Basic data types .....	125
A.3	General data types .....	125
A.4	User information data types .....	141
A.5	DTM information data type .....	142
A.6	BTM data types .....	142
A.7	Device and Scan identification data types .....	144
A.8	Function data types .....	148
A.9	AuditTrail data types .....	151
A.10	Documentation data types .....	152
A.11	DeviceList data type .....	153
A.12	Network management data types .....	155
A.13	Instance data types .....	156
A.14	DeviceStatus data types .....	161
A.15	OnlineCompare data types .....	161
A.16	UserInterface data types .....	162
A.17	Fieldbus-specific data types .....	163
Bibliography .....		165
Figure 1 – Part 2 of the IEC 62453 series .....		12
Figure 2 – Abstract FDT model .....		15
Figure 3 – Frame Application with integrated Communication Channel .....		19
Figure 4 – Device Type Manager (DTM) .....		19
Figure 5 – Communication DTM .....		20
Figure 6 – Device DTM .....		21
Figure 7 – Gateway DTM .....		21
Figure 8 – Composite Device DTM .....		22
Figure 9 – Module DTM .....		23
Figure 10 – Block Type Manager (BTM) .....		24
Figure 11 – Presentation object .....		25
Figure 12 – Channel object .....		26
Figure 13 – Communication Channel .....		27
Figure 14 – Combined Process/Communication Channel .....		28
Figure 15 – Identification of connected devices .....		29
Figure 16 – FDT topology for a simple system topology .....		30
Figure 17 – FDT topology for a complex system topology .....		31
Figure 18 – Point-to-point communication .....		33
Figure 19 – Nested communication .....		34
Figure 20 – DTM, DTM Device Type and device identification information .....		35
Figure 21 – Connected hardware identification .....		36
Figure 22 – FDT storage and synchronization mechanisms .....		37

Figure 23 – DTM state machine .....	38
Figure 24 – Substates of communication allowed .....	39
Figure 25 – Main use case diagram .....	44
Figure 26 – Observation use cases .....	46
Figure 27 – Operation use cases .....	47
Figure 28 – Maintenance use cases .....	50
Figure 29 – Planning use cases .....	54
Figure 30 – OEM Service .....	56
Figure 31 – Administrator use cases .....	56
Figure 32 – Address setting via DTM Presentation object .....	58
Figure 33 – Fieldbus scanning .....	59
Figure 34 – Fieldbus master configuration tool as part of a DTM .....	61
Figure 35 – Process Image .....	62
Figure 36 – Transfer of layout information using ProcessImage services .....	62
Figure 37 – Redundancy scenarios .....	63
Figure 38 – FDT topology generation triggered by the Frame Application .....	106
Figure 39 – FDT topology generation triggered by a DTM .....	106
Figure 40 – Set or modify device address – with user interface .....	107
Figure 41 – Set or modify device address – without user interface .....	108
Figure 42 – Set or modify all device addresses – with user interface .....	108
Figure 43 – Point-to-point communication .....	109
Figure 44 – Nested communication .....	110
Figure 45 – Device-initiated data transfer .....	111
Figure 46 – Scanning and DTM assignment .....	112
Figure 47 – Multi-user system .....	113
Figure 48 – General synchronized locking mechanism .....	114
Figure 49 – General non-synchronized locking mechanism .....	115
Figure 50 – Parameterization in the case of synchronized locking mechanism .....	115
Figure 51 – Modification of state machine of instance data .....	117
Figure 52 – Persistence of state machine of instance data .....	118
Figure 53 – Management of redundant topology .....	121
Figure 54 – Associating data to a dataSetId .....	122
Figure 55 – De-associating data for a supported dataSetId .....	123
Table 1 – Description of FDT objects .....	16
Table 2 – Description of associations between FDT objects .....	17
Table 3 – Transitions of DTM states .....	39
Table 4 – Transitions of DTM 'communication allowed' substates .....	40
Table 5 – Operation phases .....	41
Table 6 – Actors .....	45
Table 7 – Operation use cases .....	48
Table 8 – Maintenance use cases .....	51
Table 9 – Planning use cases .....	54

Table 10 – Administrator use cases .....	57
Table 11 – Arguments for service PrivateDialogEnabled .....	66
Table 12 – Arguments for service SetLanguage .....	67
Table 13 – Arguments for service SetSystemGuiLabel .....	68
Table 14 – Arguments for service GetTypeInformation (for DTM) .....	69
Table 15 – Arguments for service GetTypeInformation (for BTM) .....	69
Table 16 – Arguments for service GetIdentificationInformation (for DTM) .....	69
Table 17 – Arguments for service GetIdentificationInformation (for BTM) .....	70
Table 18 – Arguments for service Hardware information (for DTM) .....	70
Table 19 – Arguments for service GetActiveTypeInfo .....	70
Table 20 – Arguments for service GetActiveTypeInfo (for BTM) .....	71
Table 21 – Arguments for service Initialize (for DTM) .....	71
Table 22 – Arguments for service Initialize (for BTM) .....	72
Table 23 – Arguments for service SetLinkedCommunicationChannel .....	72
Table 24 – Arguments for service EnableCommunication .....	72
Table 25 – Arguments for service ReleaseLinkedCommunicationChannel .....	73
Table 26 – Arguments for service ClearInstanceData .....	73
Table 27 – Arguments for service Terminate .....	74
Table 28 – Arguments for service GetFunctions .....	74
Table 29 – Arguments for service InvokeFunctions .....	75
Table 30 – Arguments for service GetGuiInformation .....	75
Table 31 – Arguments for service OpenPresentation .....	76
Table 32 – Arguments for service ClosePresentation .....	76
Table 33 – Arguments for service GetChannel .....	77
Table 34 – Arguments for service GetDocumentation .....	77
Table 35 – Arguments for service InstanceDataInformation .....	78
Table 36 – Arguments for service InstanceDataRead .....	78
Table 37 – Arguments for service InstanceDataWrite .....	79
Table 38 – Arguments for service Verify .....	79
Table 39 – Arguments for service CompareDataValueSets .....	79
Table 40 – Arguments for service DeviceDataInformation .....	80
Table 41 – Arguments for service DeviceDataRead .....	80
Table 42 – Arguments for service DeviceDataWrite .....	81
Table 43 – Arguments for service NetworkManagementInfoRead .....	81
Table 44 – Arguments for service NetworkManagementInfoWrite .....	82
Table 45 – Arguments for service DeviceStatus (for DTM) .....	82
Table 46 – Arguments for service CompareInstanceDataWithDeviceData (for DTM) .....	83
Table 47 – Arguments for service WriteDataToDevice (for DTM) .....	83
Table 48 – Arguments for service ReadDataFromDevice(for DTM) .....	84
Table 49 – Arguments for service OnLockInstanceData .....	84
Table 50 – Arguments for service OnUnlockInstanceData .....	85
Table 51 – Arguments for service OnInstanceDataChanged .....	85
Table 52 – Arguments for service OnInstanceChildDataChanged .....	85

Table 53 – Arguments for service Export .....	86
Table 54 – Arguments for service Import.....	86
Table 55 – Arguments for service ReadChannelInformation .....	87
Table 56 – Arguments for service WriteChannelInformation .....	87
Table 57 – Arguments for service ReadChannelData .....	87
Table 58 – Arguments for service WriteChannelData .....	88
Table 59 – Arguments for service GetSupportedProtocols.....	88
Table 60 – Arguments for service Connect.....	89
Table 61 – Arguments for service Disconnect .....	90
Table 62 – Arguments for service AbortRequest .....	90
Table 63 – Arguments for service AbortIndication .....	90
Table 64 – Arguments for service Transaction .....	91
Table 65 – Arguments for service SequenceDefine .....	92
Table 66 – Arguments for service SequenceStart.....	92
Table 67 – Arguments for service ValidateAddChild.....	92
Table 68 – Arguments for service ChildAdded.....	93
Table 69 – Arguments for service ValidateRemoveChild .....	93
Table 70 – Arguments for service ChildRemoved .....	94
Table 71 – Arguments for service SetChildrenAddresses .....	94
Table 72 – Arguments for service GetChannelFunctions .....	95
Table 73 – Arguments for service GetGuiInformation .....	95
Table 74 – Arguments for service Scan.....	95
Table 75 – Arguments for service OnErrorMessage .....	96
Table 76 – Arguments for service OnProgress .....	96
Table 77 – Arguments for service OnOnlineStatusChanged .....	97
Table 78 – Arguments for service OnFunctionsChanged .....	97
Table 79 – Arguments for service GetDtmInfoList .....	97
Table 80 – Arguments for service CreateChild (DTM) .....	98
Table 81 – Arguments for service CreateChild (BTM).....	98
Table 82 – Arguments for service DeleteChild.....	98
Table 83 – Arguments for service MoveChild .....	99
Table 84 – Arguments for service GetParentNodes .....	99
Table 85 – Arguments for service GetChildNodes .....	99
Table 86 – Arguments for service GetDtm.....	100
Table 87 – Arguments for service ReleaseDtm.....	100
Table 88 – Arguments for service OnAddedRedundantChild .....	100
Table 89 – Arguments for service OnRemovedRedundantChild.....	101
Table 90 – Arguments for service SaveInstanceData .....	101
Table 91 – Arguments for service LoadInstanceData .....	101
Table 92 – Arguments for service GetPrivateDtmStorageInformation .....	102
Table 93 – Arguments for service LockInstanceData.....	102
Table 94 – Arguments for service UnlockInstanceData.....	103
Table 95 – Arguments for service OnInstanceDataChanged.....	103

Table 96 – Arguments for service ValidateProcessImage .....	103
Table 97 – Arguments for service OpenPresentationRequest .....	104
Table 98 – Arguments for service ClosePresentationRequest .....	104
Table 99 – Arguments for service UserDialog .....	105
Table 100 – Arguments for service RecordAuditTrailEvent .....	105
Table 101 – Modifications state machine of instance data .....	117
Table 102 – Persistence state machine of instance data .....	118
Table 103 – Example life cycle of a DTM .....	119
Table A.1 – Basic data types .....	125
Table A.2 – Simple general data types .....	125
Table A.3 – Definition of classificationId enumeration values .....	132
Table A.4 – General structured data types .....	134
Table A.5 – Simple user information data types .....	141
Table A.6 – Structured user information data type .....	142
Table A.7 – Structured DTM information data type .....	142
Table A.8 – Simple BTM data types .....	143
Table A.9 – Structured BTM data types .....	144
Table A.10 – Simple device identification data types .....	145
Table A.11 – Structured device identification data types .....	146
Table A.12 – Simple function data types .....	149
Table A.13 – Structured function data types .....	150
Table A.14 – Simple auditTrail data types .....	151
Table A.15 – Structured auditTrail data types .....	152
Table A.16 – Simple documentation data types .....	152
Table A.17 – Structured documentation data types .....	153
Table A.18 – Simple deviceList data type .....	154
Table A.19 – Structured deviceList data type .....	154
Table A.20 – Simple network management data types .....	155
Table A.21 – Structured network management data types .....	156
Table A.22 – Simple instance data types .....	157
Table A.23 – Structured instance data types .....	159
Table A.24 – Simple device status data types .....	161
Table A.25 – Structured device status data types .....	161
Table A.26 – Simple online compare data types .....	161
Table A.27 – Structured online compare data types .....	162
Table A.28 – Simple user interface data types .....	162
Table A.29 – Structured user interface data types .....	163
Table A.30 – Fieldbus data types .....	164

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

---

## FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

### Part 2: Concepts and detailed description

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62453-2 has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process measurement, control and automation. It is an International Standard.

This third edition cancels and replaces the second edition published in 2016. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) clarification for Static Function,
- b) clarification regarding system GUI label,
- c) clarification regarding loss of connection.

The text of this International Standard is based on the following documents:

Draft	Report on voting
65E/906/FDIS	65E/933/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at [www.iec.ch/members\\_experts/refdocs](http://www.iec.ch/members_experts/refdocs). The main document types developed by IEC are described in greater detail at [www.iec.ch/standardsdev/publications](http://www.iec.ch/standardsdev/publications).

A list of all parts of the IEC 62453 series, under the general title *Field device tool (FDT) interface specification*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under [webstore.iec.ch](http://webstore.iec.ch) in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION

This part of IEC 62453 is an interface specification for developers of FDT<sup>1</sup> (Field Device Tool) components for function control and data access within a client/server architecture. The specification is a result of an analysis and design process to develop standard interfaces to facilitate the development of servers and clients by multiple vendors that need to interoperate seamlessly.

With the integration of fieldbuses into control systems, there are a few other tasks which need to be performed. In addition to fieldbus- and device-specific tools, there is a need to integrate these tools into higher-level system-wide planning or engineering tools. In particular, for use in extensive and heterogeneous control systems, typically in the area of the process industry, the unambiguous definition of engineering interfaces that are easy to use for all those involved is of great importance.

A device-specific software component created according to this document is called Device Type Manager (DTM). It integrates all device-specific data, functions and business rules into the system via the FDT services defined herein.

The FDT/DTM approach is open for all kind of fieldbuses and enables integration variety of devices into heterogeneous systems.

Figure 1 shows how this document is aligned in the structure of the IEC 62453 series.

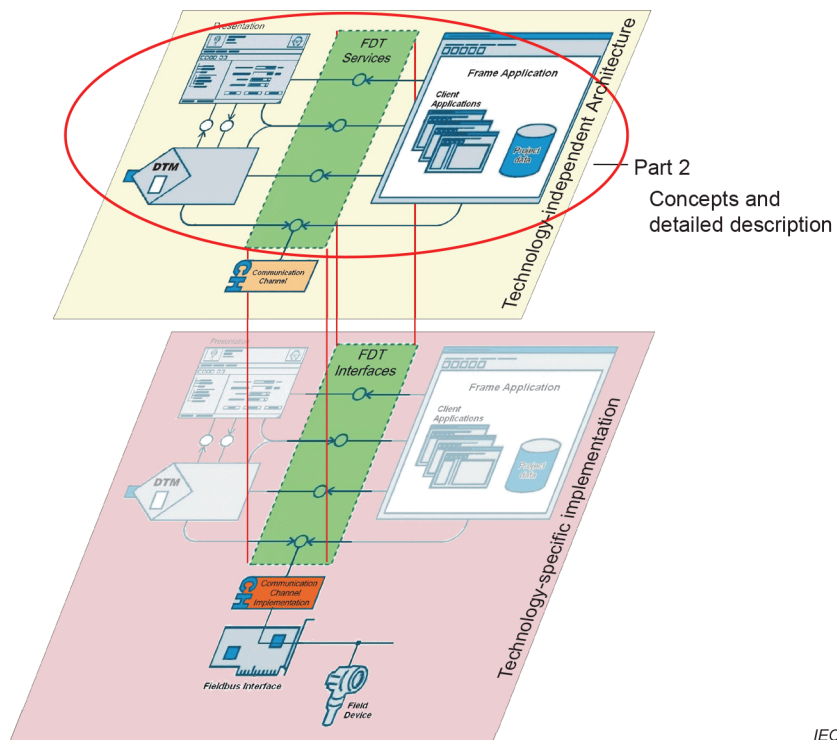


Figure 1 – Part 2 of the IEC 62453 series

<sup>1</sup> FDT® is a trademark of products supplied by FDT Group AISBL. This information is given for convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.

# FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

## Part 2: Concepts and detailed description

### 1 Scope

This part of IEC 62453 explains the common principles of the field device tool concept. These principles can be used in various industrial applications such as engineering systems, configuration programs and monitoring and diagnostic applications.

This document specifies the general objects, general object behavior and general object interactions that provide the base of FDT.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61131 (all parts), *Programmable controllers*

IEC TR 62390:2005, *Common automation device – Profile guideline*

IEC 62453-1:2016, *Field device tool (FDT) interface specification – Part 1: Overview and guidance*

IEC 62453-3xy (all parts), *Field device tool (FDT) interface specification – Part 3xy: Communication profile integration*

### 3 Terms, definitions, symbols, abbreviated terms and conventions

#### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62453-1 as well as the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

##### 3.1.1

##### **Child DTM**

DTM instance in an FDT Project, which is classified by its relation to a Parent DTM

Note 1 to entry: Any DTM which uses FDT communication may be classified as Child DTM (i.e. Device DTM, Gateway DTM, Module DTM and BTM).