



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA B510-18
(Revision of ANSI/AWWA B510-12)

AWWA Standard

Carbon Dioxide

Effective date: May 1, 2018.

First edition approved by AWWA Board of Directors June 18, 1989.

This edition approved Jan. 20, 2018.

Approved by American National Standards Institute Nov. 30, 2017.




AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal - American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether the person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or e-mailing info@ansi.org.

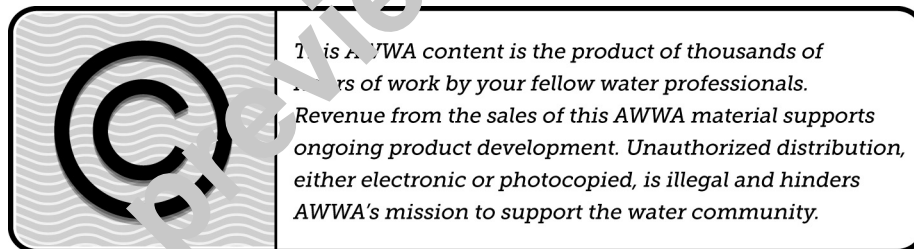

ISBN-13, print: 978-1-62576-287-0

eISBN-13, electronic: 978-1-61300-468-5

DOI:<http://dx.doi.org/10.12999/AWWA.B510.18>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2018 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Committee on Carbon Dioxide, which developed this standard, had the following personnel at the time of approval:

Franklyn W. Pogge, *Chair*

General Interest Members

S. Cardia,* Standards Council Liaison, Mueller Company, Chattanooga, Tenn.

N.J. Edman,* Standards Group Liaison, AWWA, Denver, Colo.

V.E. Jacobsen, TKDA, Saint Paul, Minn.

D.A. Johnson, Saint Cloud, Minn.

S.J. Posavec,* Standards Group Liaison, AWWA, Denver, Colo.

Producer Member

D. Burgener, Air Liquide America Corporation, Countryside, Ill.

M.A. Dirth, Tomco2 Systems, Loganville, Ga.

User Members

T.F. Clark, Monroe County Water Authority, Rochester, N.Y.

R.T. Dixon, Truckee Meadows Water Authority, Reno, Nev.

T.J. LaFountain, City Water, Light and Power, Springfield, Ill.

F.W. Pogge, Kansas City Water Services Department, Kansas City, Mo.

* Liaison, nonvoting

This page intentionally blank.

Currently in preview, click buy full version

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword		3	Definitions 2
I.	vii	4	Requirements
I.A.	vii	4.1	Physical Description 3
I.B.	viii	4.2	Chemical Requirements 3
I.C.	viii	4.3	Impurities 3
II	x	5	Verification
II.A	x	5.1	Sampling 5
	x	5.2	Test Procedures 7
III	xi	6	Delivery
III.A	xi	6.1	Marking 14
	xi	6.2	Packaging and Shipping 14
III.B	xii	6.3	Affidavit of Compliance or Certified Analysis 16
IV	xii		
V	xii		
Standard			
1	General		
1.1	1	Appendix	
1.2	1	A	Bibliography 17
1.3	1		
2	References 2	Table	
		1	Directory of Limiting Characteristics 4

This page intentionally blank.

Currently in preview, click buy full version

Foreword

This Foreword is for information only and is not a part of ANSI/AWWA B510.*

I. Introduction.

I.A. *Background.* Carbon dioxide (CO₂) is a colorless, odorless, and tasteless gas that forms a very weak acid known as carbonic acid when dissolved in water. The reaction of carbon dioxide in water to be treated forms bicarbonates with calcium carbonate or calcium hydroxide when used to neutralize excess lime following lime softening. Originally, carbon dioxide gas was added to the water to convert normal carbonates, which are slightly soluble, to bicarbonates, which are more soluble, to prevent the precipitation of encrusting scale from the water. This practice, however, led to the formation of an aggressive water, and the addition of carbon dioxide is now used primarily for pH adjustment following excess lime softening or lime treatment. Additional information on carbon dioxide is contained in CGA† C-6, *Carbon Dioxide*.

Carbon dioxide gas for recarbonation may be obtained in several ways. In older water plants, the gas is made by burning a hydrocarbon fuel, such as coke, oil, or gas (or a combination of these), with an excess of air scrubbing the stack gases if necessary, and conveying the gas to the point of application using a compressor or blower. There may be a wide variation in the percentage of carbon dioxide in the gases so that very frequent attention and adjustment of the regulating valves are necessary. Underwater burners, in which a mixture of air and gas such as propane is ignited and burned near the bottom of the recarbonation basin, are free from many of these difficulties.

Production problems on site generation of carbon dioxide and low-absorption efficiency led to the use of commercially manufactured carbon dioxide in the 1960s. A vaporizer is used to change the liquid carbon dioxide to a gas, which passes through a pressure-reducing valve to the diffusers. The amount of gas used can be controlled very accurately by flow measurement. Because the gas is pure carbon dioxide, much smaller pipe and diffusing equipment are needed than for carbon dioxide generated from fuels, and the danger from carbon monoxide is virtually eliminated.

Commercial carbon dioxide is generally obtained in bulk as a liquid under pressure from industrial gas companies and certain chemical suppliers. It must be vaporized and dissolved in water at the point of application. Commercial production of carbon dioxide is generally by one of the following methods:

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

† Compressed Gas Association Inc., 14501 George Carter Way, Suite 103, Chantilly, VA 20151.

- Recovery of carbon dioxide gas as a byproduct from ammonia plants
- Recovery and purification of byproduct carbon dioxide from steam reforming of methane followed by the shift reaction
- Recovery and purification of gas produced as a byproduct of alcohol plants
- Natural carbon dioxide gas wells
- Recovery and purification of byproduct gas from the calcining of limestone
- Acid neutralization
- Combustion of carbonaceous materials (such as fuel oil and natural gas) and purification of the resulting flue gas

Carbon dioxide obtained from any of these sources is processed to a purity of 99 percent or better and contains no odor or taste contaminants. By compressing and cooling, carbon dioxide gas is condensed into its liquid form, which is the state most commonly used for transfer and storage in water treatment plants.

Because of the varied nature of carbon dioxide production and the equipment in use in the water supply industry today, it was the consensus of the AWWA Standards Committee on Carbon Dioxide that this standard address only the recommendations for procurement of commercial carbon dioxide. This does not preclude any user of carbon dioxide who produces it onsite from using the analytical techniques described in this standard to determine the purity of the product produced. It was not the intention of the committee to recommend any particular means of carbon dioxide generation or use, but merely to provide a standard for the purchaser of commercially produced carbon dioxide on the industrial market.

I.B. *History.* The first edition of the AWWA standard for carbon dioxide was approved by the AWWA Board of Directors on June 18, 1989. The standard was approved in the course of the activities of the AWWA Standards Committee on Carbon Dioxide. The purpose of ANSI/AWWA B510 is to cover carbon dioxide and not the design of carbon dioxide handling facilities or methods of transfer of carbon dioxide to the water being treated. Design information may be found in *Journal AWWA* and in other publications, some of which are listed in Appendix A. Subsequent editions of this standard were approved on Jan. 22, 1995; June 11, 2000; Feb. 12, 2006; and Jan. 22, 2012. This edition was approved on Jan. 20, 2018.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF)

and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including two standards developed under the direction of NSF:† NSF/ANSI‡ 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 60. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdictions. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” of NSF/ANSI 60 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA B510 addresses additive requirements in Sec. 4.3 of the standard. The transfer of contaminants from chemicals to processed water or to residual solids is becoming a problem of greater concern. The language in Sec. 4.3.4 is a recommendation only for direct additives used in the treatment of potable water to be certified by an accredited certification organization in accordance with NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects. However, users of the standard may opt to make this certification a requirement for the product. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additive requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

* Persons outside the United States should contact the appropriate authority having jurisdiction.

† NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

‡ American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

II. Special Issues.

II.A. *Storage and Handling Precautions.* Carbon dioxide is a colorless, odorless gas of high specific gravity. It is hazardous because it is an asphyxiant and can replace the ambient air, causing an oxygen deficiency. Carbon dioxide gas is physiologically active and is ingested and exhaled by humans in low concentrations. Increasing exposure to elevated concentrations of carbon dioxide in air breathed results in an increased respiration rate. Carbon dioxide gas has been given an 8-hour time-weighted average (TWA) by the Occupational Safety and Health Administration (OSHA) of 5,000 ppm (0.5 percent).^{*} The immediately dangerous to life or health level (IDLH) recommended by the National Institute for Occupational Safety and Health (NIOSH)[†] has been set at 40,000 ppm (4 percent). Further details on physiological effects of carbon dioxide can be found in specific texts, such as *Carbon Dioxide Tolerance and Toxicity*.[‡]

Because carbon dioxide is denser than air, it tends to accumulate in low and confined areas. Therefore, precautions, such as the careful location of storage facilities and ventilation of enclosed areas where carbon dioxide can accumulate, should be incorporated in the design of carbon dioxide systems to minimize the hazard. Filtering-type gas masks are not to be used where there is a possibility of a high concentration of carbon dioxide. Self-contained breathing apparatus and hose masks are required. Contact of skin with the cold gas and solid (dry ice) formed by expanding liquid carbon dioxide should be avoided, as it can cause severe freeze burns on the skin. Consult appropriate OSHA, NIOSH, and Compressed Gas Association (CGA) reference materials for additional safety information.

All lines or piping from a bulk carbon dioxide storage tank must be protected by adequate pressure-relief devices when there is any possibility of pressure buildup from entrapped liquid carbon dioxide. A pressure-relief device should be provided between the tank shutoff valve and the first pressure regulator, between the first and second pressure regulators, and between any other two points where liquid carbon dioxide might be entrapped. Because of the possibility that a buildup of static electricity could result from the flow of liquid carbon dioxide in a pipeline, liquid carbon dioxide pipelines should be electrically grounded.

^{*} *Code of Federal Regulations*, Title 29, CFR Part 1910 (Labor). US Department of Labor, Superintendent of Documents, US Government Printing Office, Washington, DC 20402.

[†] National Institute for Occupational Safety and Health, 4676 Columbia Parkway, Cincinnati, OH 45226.

[‡] Lambertson, C.J. 1974. *Carbon Dioxide Tolerance and Toxicity*. Institute for Environmental Medicine, University of Pennsylvania, Philadelphia, PA 19104.

Appropriate signs should be posted near areas where carbon dioxide is stored or fed to warn of the possibility of high carbon dioxide concentrations. Tunnels or other poorly ventilated areas where carbon dioxide lines are placed should be monitored with a continuous carbon dioxide analyzer. An analyzer should indicate carbon dioxide levels at the entrance to a tunnel or poorly ventilated area and should be capable of activating high-level alarms.

For additional safety information, refer to safety data sheets (SDSs) available from the supplier or manufacturer.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. Purchaser Options and Alternatives. The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA B510, Carbon Dioxide, of latest revision.
2. Whether compliance with NSF/ANSI 60, Drinking Water Treatment Chemicals—Health Effects, is required.
3. Delivery method.
4. Size and specific type of storage container to be used.
5. Details of other federal, state or provincial, and local requirements (Section 4).
6. If the carbon dioxide supplied should exceed the 99.5 percent purity level or be less than 99.5 percent pure (Sec. 4.2), in accordance with Table 1 of this standard.
7. If cylinder shipments are specified and, if required, the number of cylinders to be sampled (Sec. 5.1.1).
8. Whether the purchaser will reject product from containers or packaging with missing or damaged seals. The purchaser may reject product from bulk containers or packages with missing or damaged seals unless the purchaser's tests of representative samples, conducted in accordance with Sec. 5.2, demonstrate that the product meets the standard. Failure to meet the standard or the absence of, or irregularities in, seals may be sufficient cause to reject a shipment.
9. If bulk shipments are specified and, if required, a weight certificate from a certified weigher supplied by the supplier or manufacturer. In lieu of weight certificates, certified liquid meter tickets may be accepted by the purchaser (Sec. 6.2.2.2).
10. Whether alternative security measures have been adopted to replace or augment the security measures set out in Sec. 6.2.3 and Sec. 6.2.4.

11. If an affidavit of compliance or certified analysis or both are required (Sec. 6.3).

III.B. *Modification to Standard.* Any modification of the provisions, definitions, or terminology in this standard must be provided by the purchaser.

IV. **Major Revisions.** Major changes made to the standard in this revision include the following:

1. Revision of Notice of Nonconformance section (Sec. 5.2.16.4).

V. **Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Services at 303.794.7711, FAX at 303.795.7603, write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098, or e-mail at standards@awwa.org.



**American Water Works
Association**

Dedicated to the World's Most Important Resource®

ANSI/AWWA B510-18
(Revision of ANSI/AWWA B510-12)

AWWA Standard

Carbon Dioxide

SECTION 1: GENERAL

Sec. 1.1 Scope

This standard describes carbon dioxide (CO₂) for use in recarbonation and pH adjustment in the treatment of potable water, wastewater, and reclaimed water.

Sec. 1.2 Purpose

The purpose of this standard is to provide minimum requirements for carbon dioxide, including physical, chemical, sampling, packaging, shipping, and testing requirements.

Sec. 1.3 Application

This standard can be referenced in documents for purchasing and receiving carbon dioxide and can be used as a guide for testing the physical and chemical properties of carbon dioxide samples. The stipulations of this standard apply when this document has been referenced and only to carbon dioxide used in the treatment of potable water, wastewater, and reclaimed water.