

ANSI/AWWA

# C708-19

(Revision of ANSI/AWWA C708-15)

AWWA Standard

## Cold-Water Meters— Multijet Type

**Effective date: June 1, 2020.**

First edition approved by Board of Directors June 20, 1976.

15th edition approved Oct. 28, 2019.

Approved by American National Standards Institute Nov. 21, 2019.



American Water Works  
Association




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or code of any governmental authority. AWWA standards are intended to represent a consensus of the water industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal AWWA*. The action becomes effective on the first day of the month following the month of *Journal AWWA* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900; or e-mailing info@ansi.org.

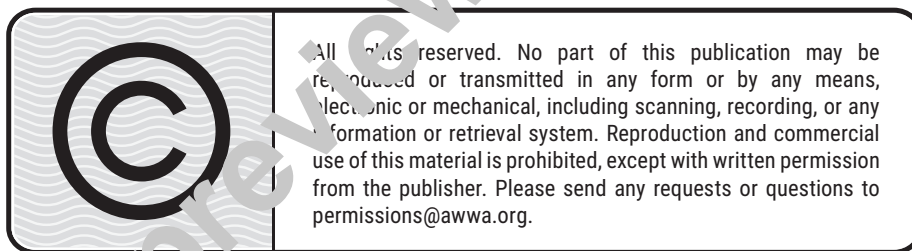

ISBN-13, print: 978-1-64717-001-3

ISBN-13, electronic: 978-1-61300-550-7

DOI: <http://dx.doi.org/10.12999/AWWA.C708.19>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2020 by American Water Works Association  
Printed in USA

## Committee Personnel

The AWWA Subcommittee on Multijet Vane-Type Meters, which reviewed, developed, and approved this revision of AWWA C708, had the following personnel at that time:

Craig C. Hannah, *Chair*

R.A. Barillas, Badger Meter, Milwaukee, Wis.

G.H. De Jarlais, Badger Meter, Milwaukee, Wis.

D.J. Devane, Zenner USA, Leeds, Ala.

L. Gregory, RG3 Meter Company, Longview, Tex.

J.G. Gunn, Johnson Controls, Inc., Victor, N.Y.

C.C. Hannah, Johnson Controls, Inc., Lubbock, Tex.

A. Hendey Sr., Hendey Meter, Beaumont, Calif.

M.C. Johnson, Utah Water Research Laboratory, Utah State University, Logan, Utah

T.A. Kelly Jr., Washington Suburban Sanitary Commission, Hyattsville, Md.

R.N. Koch, Master Meter Inc., Pittsburgh, Pa.

J. Pintok, RG3 Meter Company, Lake Mary, Fla.

J.A. Reiss, Elster AMCO Water LLC, Ocala, Fla.

R. Sloan, Birmingham Water Works Board, Birmingham, Ala.

T. Smith, Sensus, Morrisville, N.C.

S.M. Swanson, Sensus, Uniontown, Pa.

W.J. Vetter, Master Meter Inc., Marshall, Tex.

A.M. Watson, Elster AMCO Water LLC, Ocala, Fla.

The AWWA Standards Committee on Water Meters, which reviewed and approved this revision, had the following personnel at the time of approval:

Thomas A. Kelly Jr., *Chair*

Michael L. Mastic, *Secretary*

*General Interest Members*

J.E. Craun, Wright-Pierce, Andover, Mass.

A. Dabak, Texas Instruments, Dallas, Tex.

D. Faber, Faber & Associates, Columbus, Ind.

R.C. Graff, Poway, Calif.

J.G. Gunn (*alternate*), Johnson Controls Inc., Victor, N.Y.

C.C. Hannah, Johnson Controls, Inc., Lubbock, Tex.  
D.E. Hood, M.E. Simpson Company Inc., Valparaiso, Ind.  
A.M. Horbovetz (*alternate*), M.E. Simpson Company Inc., Valparaiso, Ind.  
M.C. Johnson, Utah Water Research Laboratory, Utah State University, Logan, Utah  
F.S. Kurtz (*liaison, nonvoting*), Standards Engineer Liaison, AWWA, Denver, Colo.  
M.L. Mastic, MARS Company, Ocala, Fla.  
R.A. Richter, National Institute of Standards and Technology, Gaithersburg, Md.  
S. Thakurdesai (*alternate*), Texas Instruments, Dallas, Tex.

*Producer Members*

F.J. Begale (*alternate*), Badger Meter, Milwaukee, Wis.  
T.D. Bianchi, Neptune Technology Group Inc., Tallassee, Ala.  
C. Brunson (*alternate*), Neptune Technology Group Inc., Tallassee, Ala.  
D. Casper (*alternate*), Mueller Systems, Cleveland, N.C.  
M.D. Cole, Meter Technology Werks, Tampa, Fla.  
G.H. De Jarlais, Badger Meter, Milwaukee, Wis.  
D.J. Devane, Zenner USA, Leeds, Ala.  
L. Gregory (*alternate*), RG3 Meter Company, Longview, Tex.  
A. Hendey Sr., Hendey Meter, Beaumont, Calif.  
R.N. Koch, Master Meter Inc., Pittsburgh, Pa.  
M. Laird (*alternate*), Metron-Farnier LLC, Boulder, Colo.  
J.A. McCraven, Mueller Systems, Cleveland, N.C.  
J. Pintok, RG3 Meter Company, Lake Mary, Fla.  
J.A. Reiss (*alternate*), Elster AMCO Water LLC, Ocala, Fla.  
M. Shamley, Metron-Farnier LLC, Boulder, Colo.  
T. Smith (*alternate*), Sensus, Morrisville, N.C.  
S.M. Swanson, Sensus, Uniontown, Pa.  
W.J. Vetter (*alternate*), Master Meter Inc., Mansfield, Tex.  
A.M. Watson, Elster AMCO Water LLC, Ocala, Fla.

*User Members*

M. I. Aragon, Denver Water, Denver, Colo.  
M.C. Bowen, City of Columbus, Division of Water, Columbus, Ohio  
J. Conover Jr., City of Sacramento, Sacramento, Calif.  
W.F. Dunnill, Consolidated Utility District of Rutherford County, Murfreesboro, Tenn.

W.M. Garfield, Arizona Water Company, Phoenix, Ariz.  
G.M. Gehringer, City of Philadelphia, Philadelphia, Pa.  
D. Griffin, City of Winnipeg Water and Waste Department, Winnipeg, Man.  
P.A. Hayes, Mammoth Community Water District, Mammoth Lakes, Calif.  
D.M. Hill, American Water, Voorhees, N.J.  
N.D. Kaufman, Truckee Donner Public Utility District, Truckee, Calif.  
T.A. Kelly Jr., Washington Suburban Sanitary Commission, Laurel, Md.  
A. Land, Dallas Water Utilities, Dallas, Tex.  
S.U. Mills-Wright (*liaison, nonvoting*), Standards Council Liaison, Dallas Water Utilities,  
Dallas, Tex.  
R. Molhoek, Desert Water Agency, Palm Springs, Calif.  
K.C. Molli, Veolia Water North America, Chicago, Ill.  
J.A. Novak, Milwaukee Water Works, Milwaukee, Wis.  
R. Sloan, Birmingham Water Works Board, Birmingham, Ala.  
D. Strub, Austin Water Utility, Austin, Tex.

# Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>		4.3	Detailed Design..... 9
I	Introduction..... ix	4.4	Marking ..... 13
I.A	Background..... ix	<b>5</b>	<b>Verification</b>
I.B	History..... ix	5.1	Basis for Rejection..... 14
I.C	Acceptance ..... ix	<b>6</b>	<b>Delivery</b>
II	Special Issues ..... xi	6.1	Packaging and Shipping ..... 14
II.A	Fire Flow ..... xi	6.2	Affidavit of Compliance ..... 14
II.B	Chlorine and Chloramine Degradation of Elastomers ..... xi	<b>Appendix</b>	
III	Use of This Standard ..... xi	A	Supplemental Information..... 15
III.A	Purchaser Options and Alternatives ... xi	A.1	Units of Measure ..... 15
III.B	Modification to Standard ..... xiii	A.2	Tests ..... 15
IV	Major Revisions ..... xiii	A.3	Testing Equipment ..... 17
V	Comments ..... xiii	A.4	Registration Accuracy ..... 17
		A.5	Periodic Tests..... 19
		A.6	Meter Storage ..... 20
		A.7	Installation ..... 20
<b>Standard</b>		<b>Tables</b>	
<b>1</b>	<b>General</b>	1	Operating Characteristics ..... 7
1.1	Scope ..... 1	2	Physical Characteristics ..... 8
1.2	Purpose ..... 1	3	Flange Dimensions ..... 10
1.3	Application ..... 1	4	Maximum Indication on Initial Dial and Minimum Register Capacity ..... 11
<b>2</b>	<b>References</b> ..... 2	A.1	Most Frequently Used Intervals Between Meter Tests..... 20
<b>3</b>	<b>Definitions</b> ..... 3		
	<b>Requirements</b>		
4.1	Materials ..... 4		
4.2	General Design ..... 7		

# Foreword

*This foreword is for information only and is not a part of ANSI/AWWA C708.*

## **I. Introduction.**

I.A. *Background.* For the past century, no tool available to water utilities has played a greater part in water conservation than the water meter. It has reduced waste and distributed the cost of operating a water system in the most equitable manner possible. Multijet meters, which were first designed and produced in 1867, have proved satisfactory for measuring domestic water service.

In inferential-type meters, the moving element is a rotor; the basic principle of this meter is to design it in such a manner that, over the working range of the instrument, the speed of rotation of the rotor bears a linear relationship to the velocity of flow through the meter.

In multijet meters, the moving element takes the form of a multiblade rotor mounted on a vertical spindle within a cylindrical measuring chamber. The liquid enters the measuring chamber through several tangential orifices around the circumference and leaves the measuring chamber through another set of tangential orifices placed at a different level in the measuring chamber.

I.B. *History.* Advances made in the development of nonmetallic materials for water meter construction have been recognized in the Materials section of this standard. Several plastic materials are currently being used successfully for meter components. Several suitable plastic materials are included in this revision.

The first edition of the standard was approved by the AWWA Board of Directors on June 20, 1976. Subsequent editions of this standard were approved on Feb. 1, 1982; Jan. 27, 1991; June 23, 1996; Jan. 16, 2005; June 12, 2011; and Jan. 24, 2015. This edition was approved on Oct. 28, 2019.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). AWWA and the Association of State Drinking Water Administrators (ASDWA) joined later.

---

\* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.\* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. Specific policies of the state or local agency.
2. Two standards developed under the direction of NSF,<sup>†</sup> NSF/ANSI/CAN<sup>‡</sup> 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects.
3. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,<sup>§</sup> and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI/CAN 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdiction. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures” to NSF/ANSI/CAN 61 does not stipulate a maximum allowable level (MAL) or contaminant for substances not regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

In an alternative approach to managing drinking water additives, some jurisdictions (including California, Louisiana, Maryland, and Vermont, at the time of this writing) are calling for reduced lead limits for materials in contact with potable water. Various third-party certifiers have been assessing products against these lead content criteria, and a first-edition ANSI-approved national standard, NSF/ANSI 372, Drinking Water System Components—Lead Content, was published in 2010.

On Jan. 4, 2011, legislation was signed revising the definition for “lead free” within the Safe Drinking Water Act (SDWA) as it pertains to “pipe, pipe fittings, plumbing fittings, and fixtures.” The changes went into effect on Jan. 4, 2014. In brief, the new

---

\* Persons outside the United States should contact the appropriate authority having jurisdiction.

<sup>†</sup> NSF International, 789 North Dixboro Road, Ann Arbor, MI 48105.

<sup>‡</sup> Standards Council of Canada, 55 Metcalfe Street, Suite 600, Ottawa, ON K1P 6L5 Canada.

<sup>§</sup> Both publications available from National Academy of Sciences, 500 Fifth Street NW, Washington, DC 20001.

provisions to the SDWA require that these products meet a weighted average lead content of not more than 0.25 percent.

ANSI/AWWA C708 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

## **II. Special Issues.**

II.A. *Fire Flow.* The meters described in this standard are not designed to be used in water service piping intended to extinguish fire. Requirements for meters used for residential fire sprinkler applications that meet the requirements of NFPA\* 13D in single- and two-family dwellings and manufactured homes, sizes 1/2 in. (20 mm) through 2 in. (50 mm), are found in ANSI/AWWA C714.

II.B. *Chlorine and Chloramine Degradation of Elastomers.* The selection of materials is critical for water service and distribution piping in locations where there is a possibility that elastomers will be in contact with chlorine or chloramines. Documented research has shown that elastomers such as gaskets, seals, valve seats, and encapsulations may be degraded when exposed to chlorine or chloramines. The impact of degradation is a function of the type of elastomeric material, chemical concentration, contact surface area, elastomer cross section, environmental conditions, and temperature. Careful selection of and specifications for elastomeric materials and the specifics of their application for each water system component should be considered to provide long-term usefulness and minimum degradation (swelling, loss of elasticity, or softening) of the elastomer specified.

**III. Use of This Standard.** It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Purchaser Options and Alternatives.* The following information should be provided by the purchaser:

1. Standard used—that is, ANSI/AWWA C708, Cold-Water Meters—Multijet Type, of latest revision.

---

\* National Fire Protection Association, One Batterymarch Park, Quincy, MA 02169.

2. Whether compliance with NSF/ANSI/CAN 61, Drinking Water System Components—Health Effects; NSF/ANSI 372, Drinking Water System Components—Lead Content; or an alternative lead content criterion is required.

3. If warranty requirements will be specified.

4. If the meter is to be read in US gallons, cubic feet, or cubic meters.

5. Details of federal, state, and local requirements (Sec. 4.1).

6. If main casings are to be constructed of a copper alloy, stainless steel, or a suitable engineering plastic (Sec. 4.1.2).

7. If meters are to be provided with cast-iron, stainless-steel, copper-alloy, or suitable engineering plastic top or bottom covers (Sec. 4.1.11), and if there is a preference.

8. Size of meter (Sec. 4.2.1) and quantity required.

9. If corrosion protection is required, such as for cast-iron frost protection covers (Sec. 4.2.6), and if there is a preference.

10. Modifications of test specifications (Sec. 4.2.8) if operating water temperatures will exceed 80°F (27°C) (Sec. A.4.2).

11. If 1½-in. (40-mm) and 2-in. (50-mm) meters (Sec. 4.3.3) are to be provided with flanged ends or threaded (spud) ends. If threaded (spud) ends are required, specify if threads are to be external NPSM or internal NPT.

12. If couplings (tailpieces) are to be provided with ⅝-in. (15-mm) to 2-in. (50-mm) meters (Sec. 4.3.4) and whether components are to be of a copper alloy, stainless steel, or a suitable engineering plastic (Sec. 4.1.9).

13. If companion flange gaskets, bolts, and nuts are to be provided with flanged meters (Sec. 4.3.5) and whether companion flanges are to be made of a copper alloy, cast iron, stainless steel, or a suitable engineering plastic (Sec. 4.1.10).

14. Details of the register to be provided (i.e., US gallons, cubic feet, or cubic meters; dry or wet register) (Sec. 4.3.6).

15. If an encoder-type remote register is required (Sec. 4.3.6.4), including specifications in detail, and including detailed warranty requirements as to battery life and compatibility with various radio frequency (RF) reading devices.

16. If the size of individual meters will be permanently marked on the register dial face (Sec. 4.4).

17. If an affidavit of compliance (Sec. 6.2) and certificate of testing for accuracy (Sec. A.2.3) are required.

18. Special materials required, if any, to resist corrosion if water is highly aggressive (Sec. A.4.3).

III.B. *Modification to Standard.* Any modification to the provisions, definitions, or terminology in this standard must be provided by the purchaser.

**IV. Major Revisions.** The major revisions to the standard in this edition include the following:

1. Guidance on selection of materials in terms of chlorine and chloramine degradation of elastomers has been provided in the foreword (Sec. II.B).

2. Reference to ANSI/AWWA C706 on Direct-Reading, Remote-Registration Systems for Cold-Water Meters has been removed (Sec. 4.3.6.4). (ANSI/AWWA C706 was withdrawn as an AWWA standard in 2015.)

3. Provisions for meter marking have been moved from Sec. 6.1 to Sec. 4.4. (The content of the requirements is unchanged.)

**V. Comments.** If you have any comments or questions about this standard, please call AWWA Engineering and Technical Support at 303.794.7711; FAX at 303.795.7603; write to the department at 6666 West Quincy Avenue, Denver, CO 80235-3098; or email at [standards@awwa.org](mailto:standards@awwa.org).



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C708-19**  
(Revision of ANSI/AWWA C708-15)

**AWWA Standard**

---

# Cold-Water Meters—Multijet Type

---

## SECTION 1: GENERAL

---

### **Sec. 1.1 Scope**

This standard describes cold-water multijet meters in sizes  $\frac{5}{8}$  in. (15 mm) through 2 in. (50 mm) for water utilities' customer service and the materials and workmanship employed in their fabrication. These meters register by recording the revolutions of a rotor set in motion by the force of flowing water striking the blades.

### **Sec. 1.2 Purpose**

The purpose of this standard is to provide the minimum requirements for multijet-type cold-water meters, including materials and design.

### **Sec. 1.3 Application**

This standard can be referenced in specifications for purchasing and receiving cold-water meters—multijet type. This standard can be used for manufacturing this type of meter. The stipulations of this standard apply when this document has been referenced and then only to cold-water meters—multijet type.